

芯伯乐®  
X I N B O L E

# Product Specification

XBLW ULN2803AL

Darlington Transistor Arrays


WEB | [www.xinboleic.com](http://www.xinboleic.com)




## Descriptions

The ULN2803AL device is a 50 V, 500 mA Darlington transistor array. The device consists of eight NPN Darlington pairs that feature high-voltage outputs with common-cathode clamp diodes for switching inductive loads. The collector-current rating of each Darlington pair is 500 mA. The Darlington pairs may be connected in parallel for higher current capability.

Applications include relay drivers, hammer drivers, lamp drivers, display drivers (LED and gas discharge), line drivers, and logic buffers. The ULN2803AL device has a 2.7-kΩ series base resistor for each Darlington pair for operation directly with TTL or 5-V CMOS devices.



DIP-18



SOP-18

## Features

- 500-mA-Rated Collector Current (Single Output)
- High-Voltage Outputs: 50 V
- Output Clamp Diodes
- Inputs Compatible With Various Types of Logic


## Applications

- Relay Drivers
- Hammer Drivers
- Lamp Drivers
- Line Drivers
- Logic Buffers
- Stepper Motors
- IP Camera
- HVAC Valve and LED Dot Matrix


## Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
ULN2803ALDTR	SOP-18	ULN2803AL	Tape	2000Pcs/Reel
ULN2803ALN	DIP-18	ULN2803ALN	Tube	1000Pcs/Box

### Logic Diagram

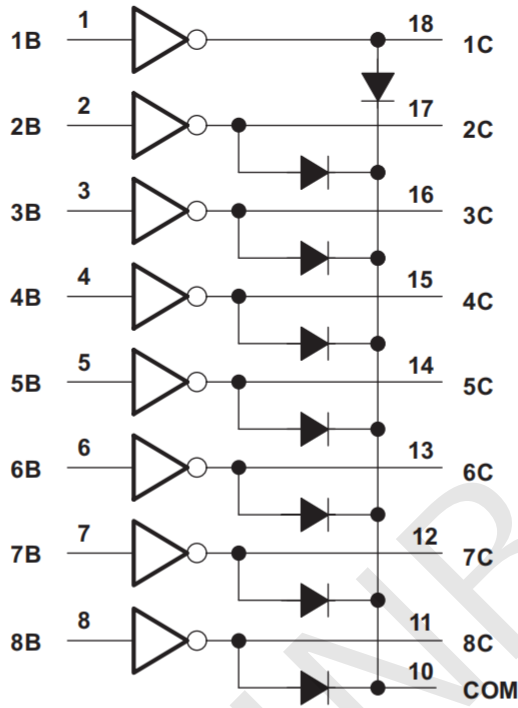

### Pin Configuration and Functions

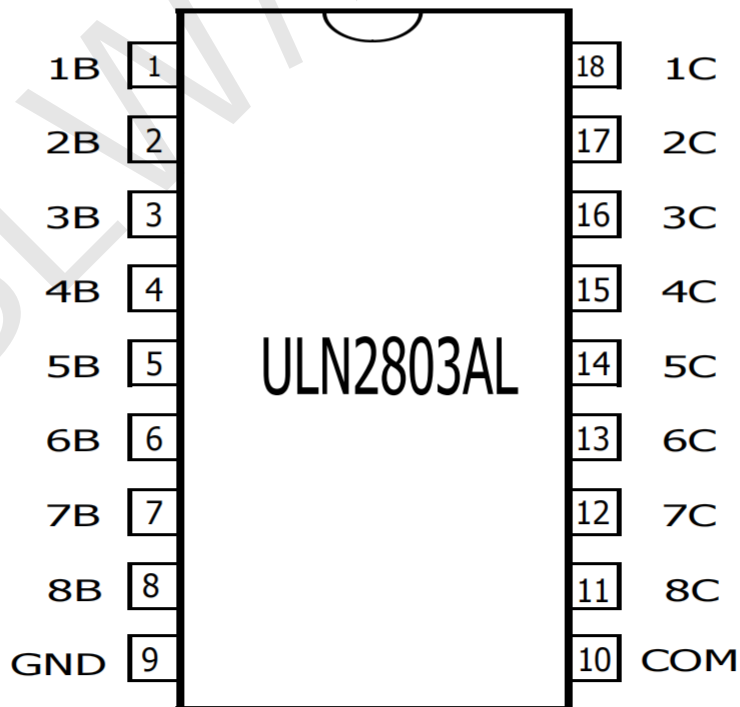

## ABSOLUTE MAXIMUM RATINGS

(T A = 25°C and rating apply to any one device in the package, unless otherwise noted.)


Characteristic	Symbol	PARAMETER		Unit
		Min	Max	
Collector-emitter voltage	$V_{CE}$	-	50	V
Input voltage	$V_i$		30	V
Collector current- continuous	$I_c$	-	500	mA
Base current- continuous	$I_B$		25	mA
Junction temperature	$T_j$		125	°C
Operating temperature	$T_{amb}$	-20	85	°C
Storage temperature	$T_{stg}$	-55	150	°C

## ELECTRICAL CHARACTERISTICS

(unless otherwise specified: T A =25°C)

Characteristics	Test conditions	Symbol	PARAMETER			Unit
			Min	Typ	Max	
Output leakage current	$V_o=50V, T_{amb}= +85^\circ C$	$I_{CEX}$			100	$\mu A$
	$V_o=50V, T_{amb}= +25^\circ C$				50	$\mu A$
Collector-Emitter saturation voltage	$I_c=350mA, I_B=500\mu A$	$V_{CES}$		1.5	1.7	V
	$I_c=200mA, I_B=350\mu A$			1.15	1.3	V
	$I_c=100mA, I_B=250\mu A$			0.85	1.1	V
Input current - on condition	$V_i=3.85V$	$I_{I(ON)}$		1.15	1.35	mA
Input voltage - on condition	$V_{CE}=2.0V, I_c=200mA$	$V_{I(ON)}$			2.4	V
	$V_{CE}=2.0V, I_c=250mA$				2.7	
	$V_{CE}=2.0V, I_c=300mA$				3.0	
Input current - off condition	$V_{CE}=2.0V, I_c=300mA$	$I_{I(OFF)}$	50	100		$\mu A$
Input capacitance		$C_i$		15	30	pF
Turn-on delay time (50% $E_i$ to 50% $E_o$ )	50% $E_i$ to 50% $E_o$	$t_{ON}$		0.25	1	$\mu s$
Turn-off delay time (50% $E_i$ to 50% $E_o$ )	50% $E_i$ to 50% $E_o$	$t_{OFF}$		0.25	1	$\mu s$
Clamp diode leakage current ( $V_R =50V$ )	$V_R=50V$	$I_R$			50	$\mu A$
					100	
Clamp diode forward Voltage	$I_F=350mA$	$V_F$		1.5	2	V

## Typical Application

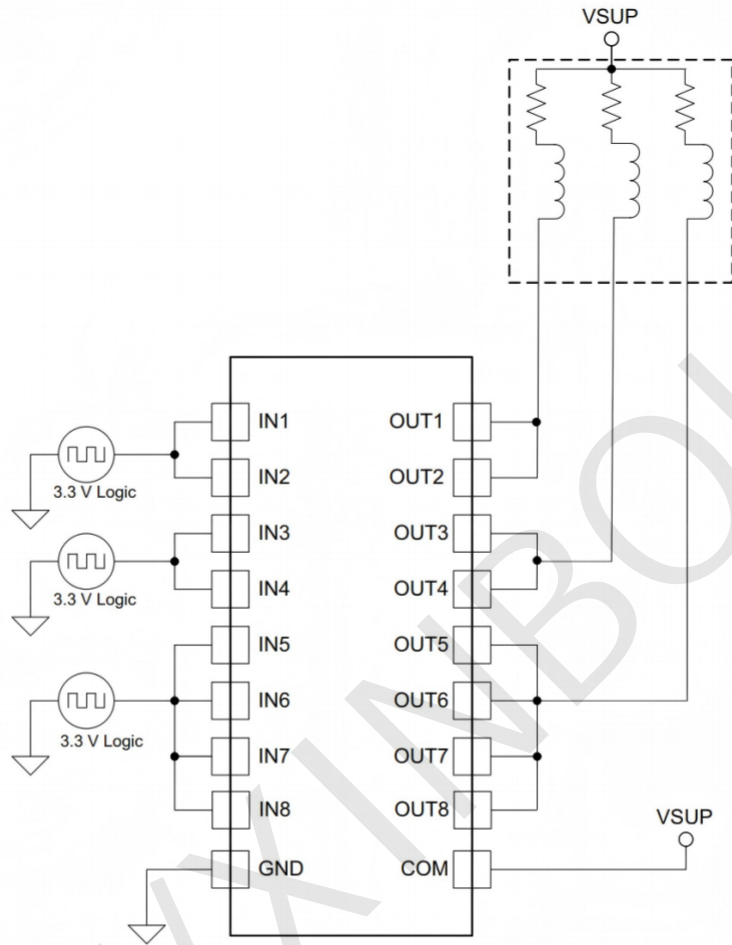

## Typical Characteristics

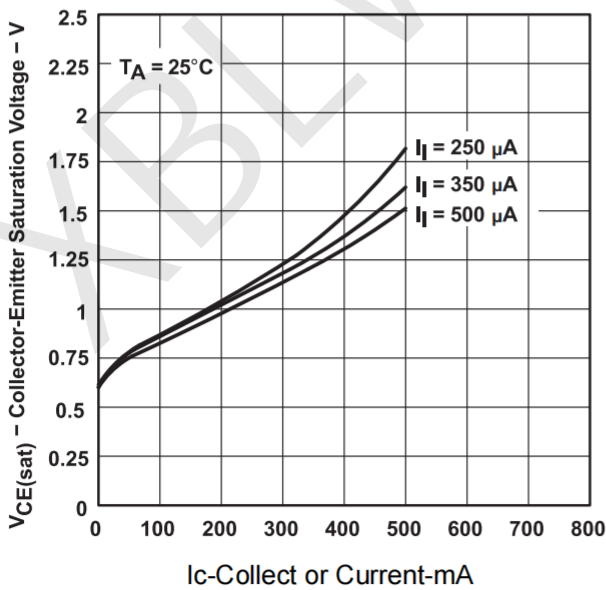


Figure 1. Collector-Emitter Saturation Voltage vs Collector Current (One Darlington)


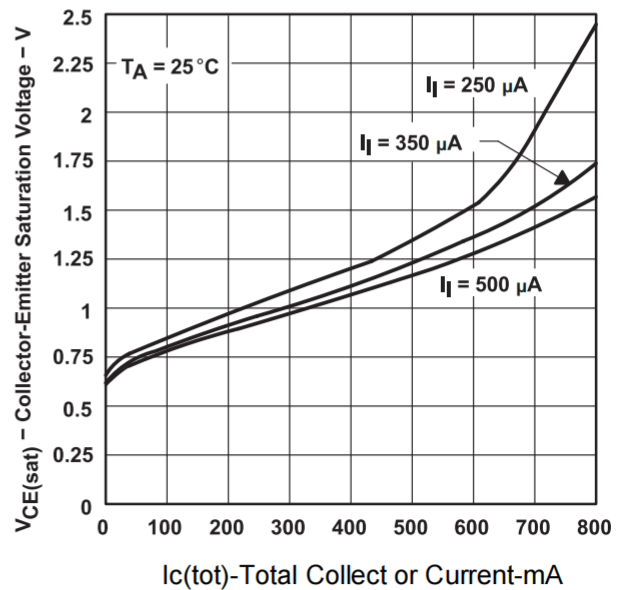


Figure 2. Collector-Emitter Saturation Voltage vs Total Collector Current (Two Darlings in Parallel)

**Package Information**


· DIP-18

Size Symbol	Dimensions In Millimeters			Size Symbol	Dimensions In Inches		
	Min (mm)	Nom (mm)	Max (mm)		Min (in)	Nom (in)	Max (in)
A	3.200	3.300	3.400	A	0.126	0.130	0.134
b	0.440		0.530	b	0.017		0.021
b1	0.430	0.460	0.490	b1	0.017	0.018	0.019
c	0.250		0.300	c	0.010		0.012
c1	0.240	0.250	0.260	c1	0.009	0.010	0.010
D	22.80	22.90	23.00	D	0.898	0.902	0.906
E	6.400	6.500	6.600	E	0.252	0.256	0.260
e	2.54 (BSC)			e	0.1 (BSC)		
eA	7.620		9.500	eA	0.300		0.374
L	3.000			L	0.118		

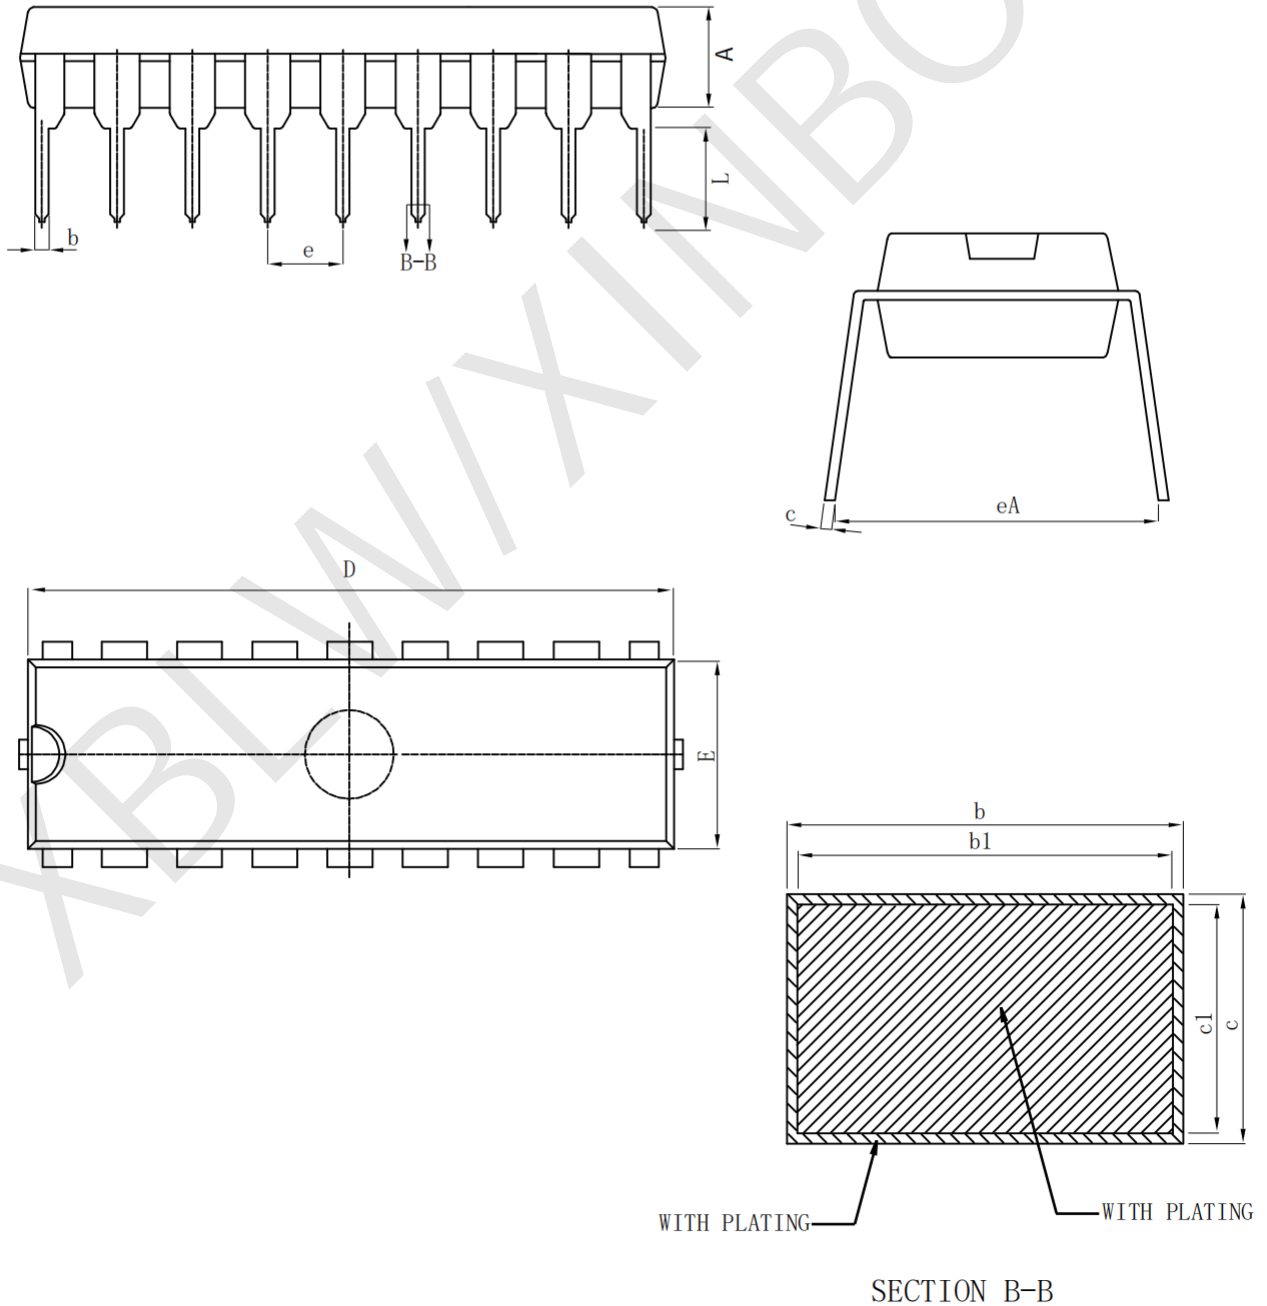

▪ SOP-18

Symbol	Dimensions In Millimeters			Symbol	Dimensions In Inches		
	Min (mm)	Nom (mm)	Max (mm)		Min (in)	Nom (in)	Max (in)
D	11.25	11.45	11.65	D	0.443	0.451	0.459
E	7.300	7.500	7.700	E	0.287	0.295	0.303
E1	10.10	10.30	10.50	E1	0.398	0.406	0.413
B	0.4(TYP)			B	0.016(TYP)		
e	1.27(TYP)			e	0.050(TYP)		
c	0.200	0.250	0.300	c	0.008	0.010	0.012
A2	2.240	2.340	2.440	A2	0.088	0.092	0.096
A1	0.100	0.150	0.250	A1	0.004	0.006	0.010
A	2.590			A	0.102		
L1	1.300	1.400	1.500	L1	0.051	0.055	0.059
L	0.700	0.800	1.000	L	0.028	0.031	0.039
θ	4°			θ	4°		

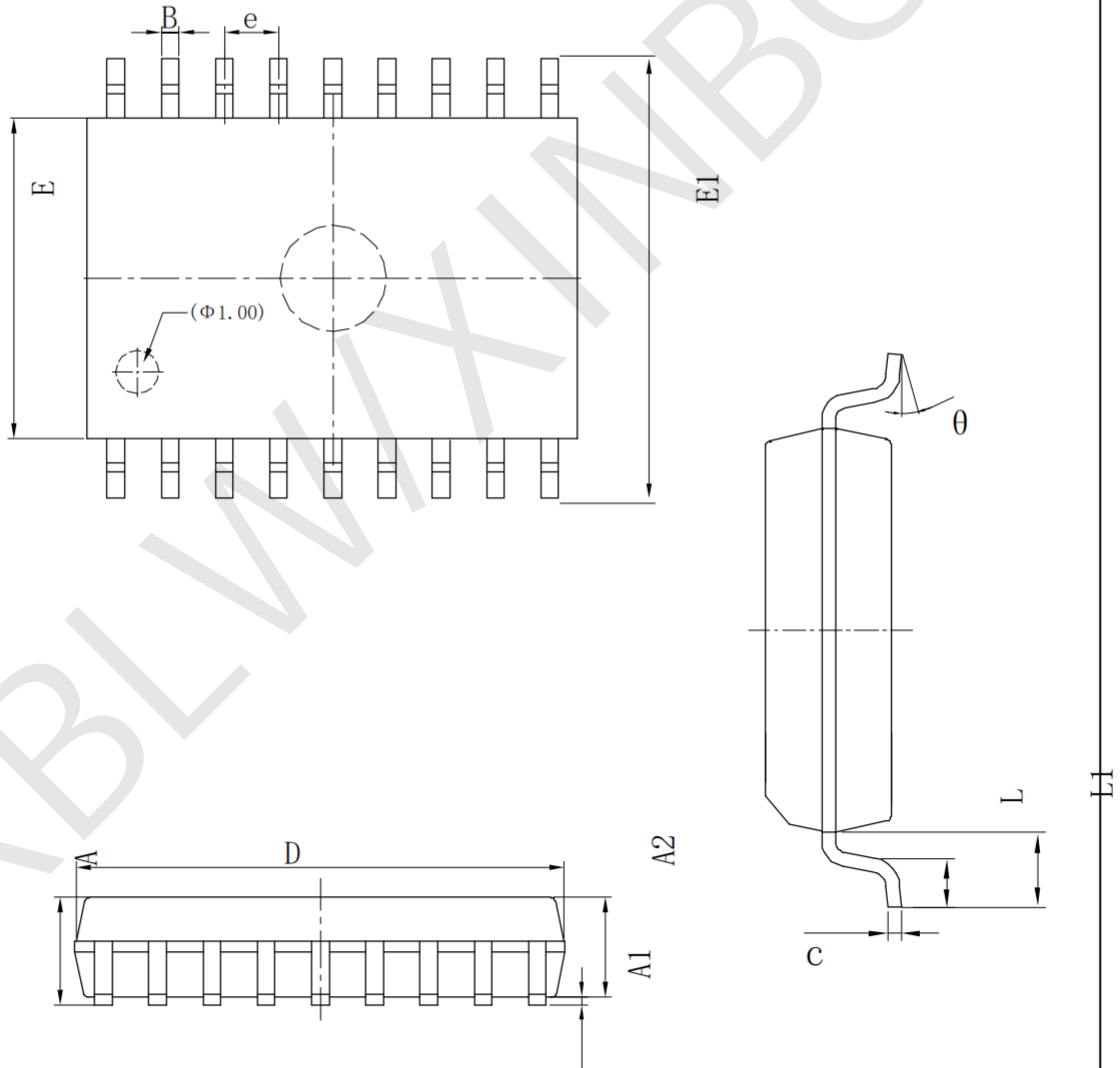

## Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semiconductor product may malfunction under specified conditions. When using XBLW products for system design and overall manufacturing, the buyer is responsible for complying with safety standards and taking appropriate safety measures to avoid risks that may cause personal injury or property damage.
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.