

## Positive Voltage Regulators for Voltage Reference Source

### ■ GENERAL DESCRIPTION

The XC62RP series are highly precise, low power consumption, positive voltage regulators, for voltage reference source, manufactured using CMOS and laser trimming technologies.

SOT-23 (150mW), SOT-89 (500mW) and TO-92 (300mW) packages are available.


### ■ APPLICATIONS

- Battery powered equipment
- Reference voltage sources
- Cameras and video recorders
- Palmtops

### ■ FEATURES


- Maximum Output Current** : 6.0mA (within max. power dissipation,  $V_{OUT}=2.0V$ )
- Output Voltage Range** : 1.5V ~ 3.5V in 100mV increments
- Highly Accurate** : Setting Voltage accuracy  $\pm 2\%$  ( $\pm 1\%$  for semi-custom products)
- Low Power Consumption** :  $3.2 \mu A$  ( $V_{OUT}=2.0$ ) (TYP.)
- Output Voltage Temperature Characteristics** :  $\pm 100\text{ppm}/^\circ\text{C}$  (TYP.)
- Line Regulation** :  $0.2\%/V$  (TYP.)
- CMOS Low Power Consumption**
- Dropout Voltage** :  $140\text{mV} @ 300\mu A$
- Ultra Small Packages** : SOT-23 (150mW) mini-mold  
SOT-89 (500mW) mini-power mold  
TO-92 (300mW)

### ■ TYPICAL APPLICATION CIRCUIT




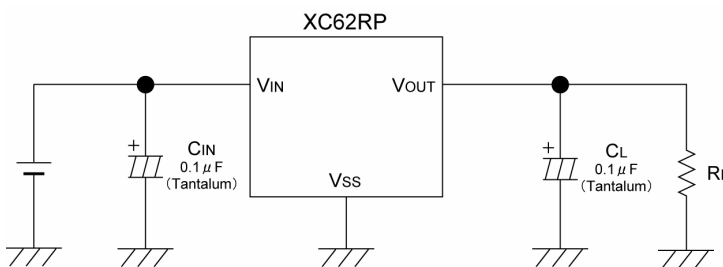


Please use with a load capacitance ( $C_L$ ) of less than  $0.1 \mu F$ .

### ■ TYPICAL PERFORMANCE CHARACTERISTICS

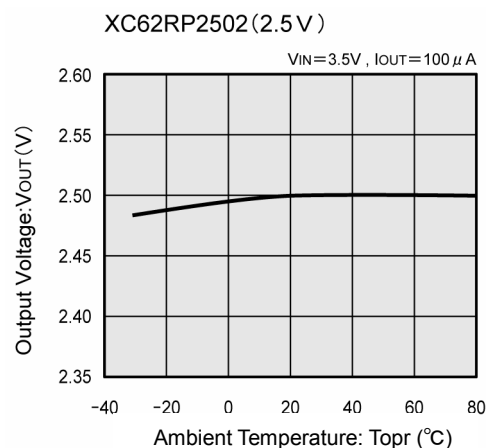

## PIN CONFIGURATION

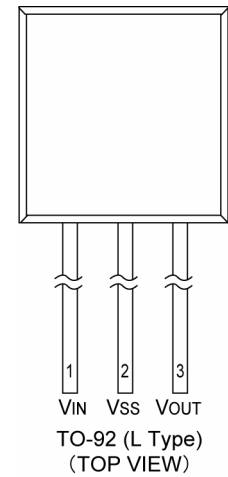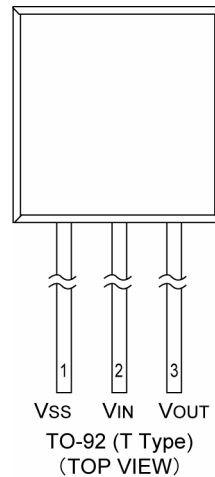

## PIN ASSIGNMENT

PIN NUMBER				PIN NAME	FUNCTION
SOT-23	SOT-89	TO-92 (T)	TO-92 (L)		
1	1	1	2	Vss	Ground
3	2	2	1	Vin	Supply Voltage Input
2	3	3	3	Vout	Output


## PRODUCT CLASSIFICATION

### Ordering Information

XC62R ①②③④⑤⑥⑦

DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
①	Polarity of Output Voltage	P	: Positive
② ③	Output Voltage	15 ~ 35	: e.g. Vout1.5V→②=1, ③=5 Vout3.0V→②=3, ③=0
④	Temperature Coefficients	0	: ±100ppm (TYP.)
⑤	Output Voltage Accuracy	1	: ±1% (Semi-custom)
		2	: ±2%
⑥	Package	M	: SOT-23
		P	: SOT-89
		T	: TO-92 (standard)
		L	: TO-92 (Custom pin configuration)
⑦	Device Orientation	R	: Embossed tape, standard feed
		L	: Embossed tape, reverse feed
		H	: Paper tape (TO-92)
		B	: Bag (TO-92)

**■ BLOCK DIAGRAM**

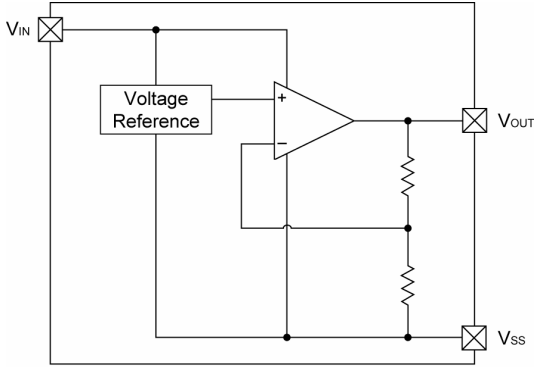

**■ ABSOLUTE MAXIMUM RATINGS**

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	V <sub>IN</sub>	12.0	V
Output Current	I <sub>OUT</sub>	50*	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	SOT-23	150	mW
	SOT-89	500	
	TO-92	300	
Operating Temperature Range	T <sub>opr</sub>	-30 ~ +80	°C
Storage Temperature Range	T <sub>stg</sub>	-40 ~ +125	°C

Note: Please ensure that I<sub>OUT</sub> is less than Pd / (V<sub>IN</sub>-V<sub>OUT</sub>).

## ELECTRICAL CHARACTERISTICS

XC62RP1602  $V_{OUT(T)}=1.6V$  (\*1)

$T_a=25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$ (*2)	$I_{OUT}=100\mu A$ $V_{IN}=2.6V$	1.568	1.600	1.632	V	1
Maximum Output Current	$I_{OUT\ max}$	$V_{IN}=2.6V$ , $V_{OUT(E)}\geq V_{OUT(T)}\times 0.95$	4.0	-	-	mA	1
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=2.6V$ $100\mu A\leq I_{OUT}\leq 300\mu A$	-	20	40	mV	1
Dropout Voltage (*3)	Vdif1	$I_{OUT}=100\mu A$	-	30	80	mV	1
	Vdif2	$I_{OUT}=300\mu A$	-	50	140	mV	1
Supply Current	$I_{SS}$	$V_{IN}=2.6V$	-	3.0	5.8	$\mu A$	2
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $2.6V\leq V_{IN}\leq 6.0V$	-	0.2	0.3	%/V	1
Input Voltage	$V_{IN}$		-	-	6.0	V	-
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $-30^\circ C\leq T_{opr}\leq 80^\circ C$	-	$\pm 100$	-	ppm/ $^\circ C$	1

XC62RP2002  $V_{OUT(T)}=2.0V$  (\*1)

$T_a=25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$ (*2)	$I_{OUT}=100\mu A$ $V_{IN}=3.0V$	1.960	2.000	2.040	V	1
Maximum Output Current	$I_{OUT\ max}$	$V_{IN}=3.0V$ , $V_{OUT(E)}\geq V_{OUT(T)}\times 0.95$	6.0	-	-	mA	1
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=3.0V$ $100\mu A\leq I_{OUT}\leq 300\mu A$	-	20	40	mV	1
Dropout Voltage (*3)	Vdif1	$I_{OUT}=100\mu A$	-	30	80	mV	1
	Vdif2	$I_{OUT}=300\mu A$	-	50	140	mV	1
Supply Current	$I_{SS}$	$V_{IN}=3.0V$	-	3.2	6.2	$\mu A$	2
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $3.0V\leq V_{IN}\leq 6.0V$	-	0.2	0.3	%/V	1
Input Voltage	$V_{IN}$		-	-	6.0	V	-
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $-30^\circ C\leq T_{opr}\leq 80^\circ C$	-	$\pm 100$	-	ppm/ $^\circ C$	1

## ■ ELECTRICAL CHARACTERISTICS (Continued)

XC62RP2502  $V_{OUT(T)}=2.5V$  (\*1)

$T_a=25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$ (*2)	$I_{OUT}=100\mu A$ $V_{IN}=3.5V$	2.450	2.500	2.550	V	1
Maximum Output Current	$I_{OUT\ max}$	$V_{IN}=3.5V$ , $V_{OUT(E)}\geq V_{OUT(T)}\times 0.95$	8.0	-	-	mA	1
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=3.5V$ $100\mu A\leq I_{OUT}\leq 300\mu A$	-	20	40	mV	1
Dropout Voltage (*3)	Vdif1	$I_{OUT}=100\mu A$	-	30	80	mV	1
	Vdif2	$I_{OUT}=300\mu A$	-	50	140	mV	1
Supply Current	$I_{SS}$	$V_{IN}=3.5V$	-	3.5	6.8	$\mu A$	2
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}\cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $3.5V\leq V_{IN}\leq 6.0V$	-	0.2	0.3	%/V	1
Input Voltage	$V_{IN}$		-	-	6.0	V	-
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr}\cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $-30^{\circ}C\leq T_{opr}\leq 80^{\circ}C$	-	$\pm 100$	-	ppm/ $^{\circ}C$	1

XC62RP3002  $V_{OUT(T)}=3.0V$  (\*1)

$T_a=25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$ (*2)	$I_{OUT}=100\mu A$ $V_{IN}=4.0V$	2.940	3.000	3.060	V	1
Maximum Output Current	$I_{OUT\ max}$	$V_{IN}=4.0V$ , $V_{OUT(E)}\geq V_{OUT(T)}\times 0.95$	10.0	-	-	mA	1
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=4.0V$ $100\mu A\leq I_{OUT}\leq 300\mu A$	-	20	40	mV	1
Dropout Voltage (*3)	Vdif1	$I_{OUT}=100\mu A$	-	30	80	mV	1
	Vdif2	$I_{OUT}=300\mu A$	-	50	140	mV	1
Supply Current	$I_{SS}$	$V_{IN}=4.0V$	-	3.8	7.3	$\mu A$	2
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}\cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $4.0V\leq V_{IN}\leq 6.0V$	-	0.2	0.3	%/V	1
Input Voltage	$V_{IN}$		-	-	6.0	V	-
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr}\cdot V_{OUT}}$	$I_{OUT}=100\mu A$ $-30^{\circ}C\leq T_{opr}\leq 80^{\circ}C$	-	$\pm 100$	-	ppm/ $^{\circ}C$	1

**NOTE:**

\*1:  $V_{OUT(T)}$ =Specified output voltage .


\*2:  $V_{OUT(E)}$ =Effective output voltage (i.e. the output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the  $V_{IN}$  pin while maintaining a certain  $I_{OUT}$  value).

\*3:  $V_{dif} = \{V_{IN1}^{(*5)} - V_{OUT1}^{(*4)}\}$

\*4:  $V_{OUT1}$ = A voltage equal to 98% of the output voltage whenever an amply stabilized  $I_{OUT}$  ( $V_{OUT(T)}+1.0V$ ) is input.

\*5:  $V_{IN1}$ = The input voltage when  $V_{OUT1}$  appears as input voltage is gradually decreased.

## ■ TYPICAL APPLICATION CIRCUIT

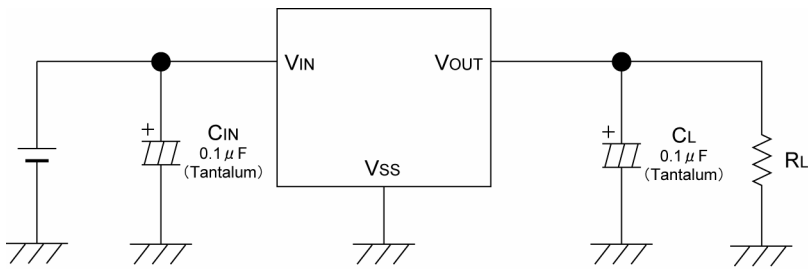


Please use with a load capacitance ( $C_L$ ) of less than  $0.1 \mu F$ .

## ■ NOTES ON USE


1. Please use with a load capacitance,  $C_L$ , of less than  $0.1 \mu F$  and in  $0.01 \mu F$  steps.
2. Since short-circuit protection is not built-in, the IC may be damaged by rush current should the output pin be connected to the Ground pin.
3. When the load capacitance,  $C_L$ , is small, overshoot will be produced when the power is switched on.
4. As the output pin's current is only a few  $\mu A$ , output voltage will increase should output be pulled-up by means of a resistor.

## ■ TEST CIRCUITS

Circuit 1








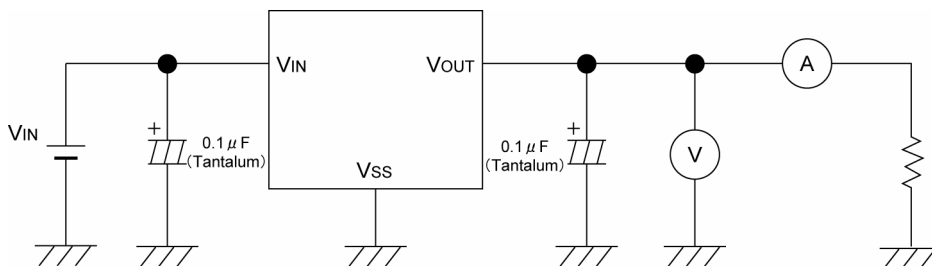


Circuit 2

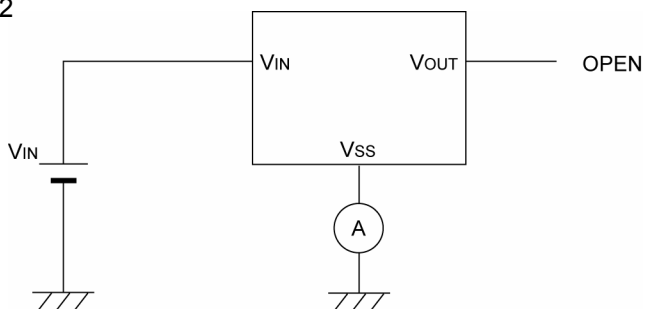









# TYPICAL PERFORMANCE CHARACTERISTICS

## (1) Output Voltage vs. Output Current

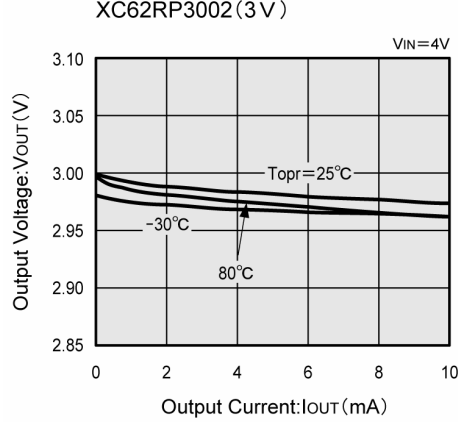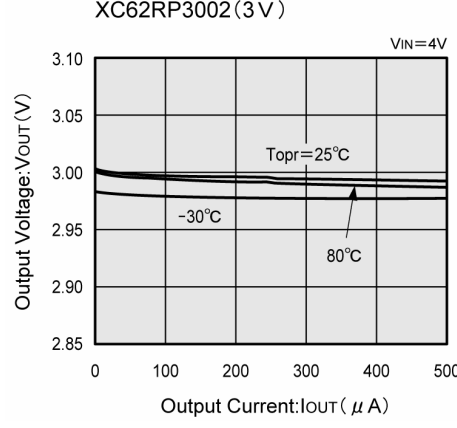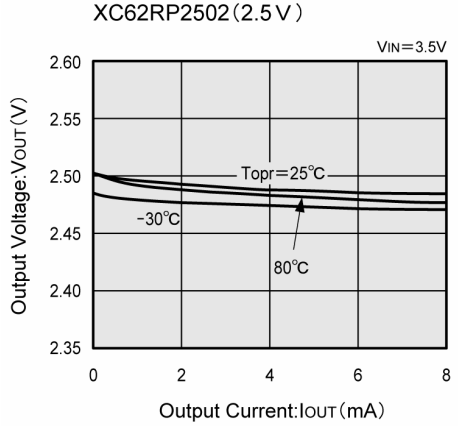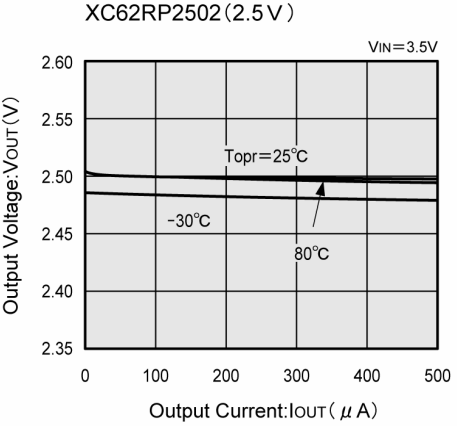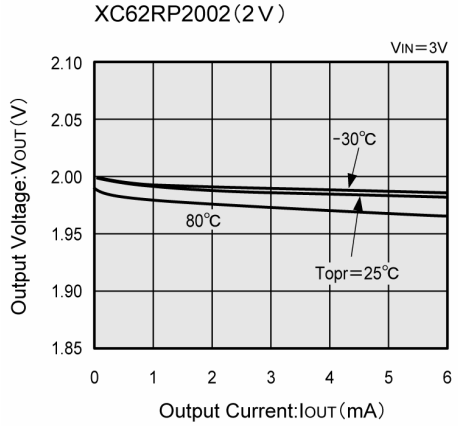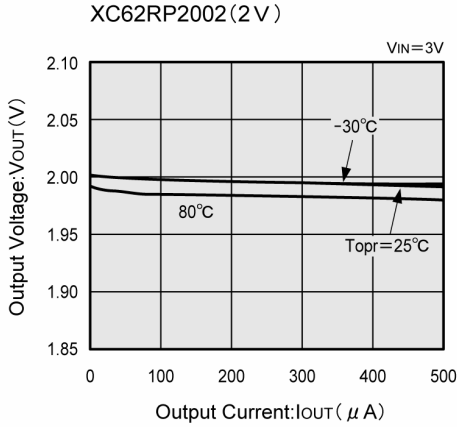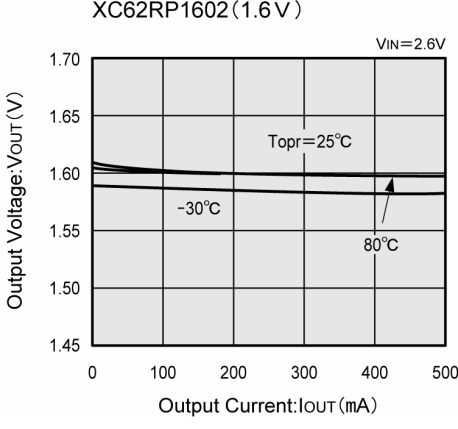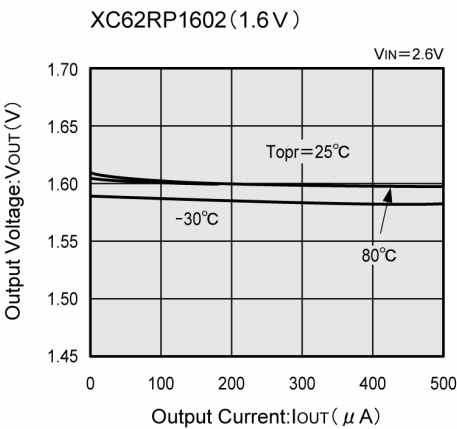

## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (2) Output Voltage vs. Input Voltage

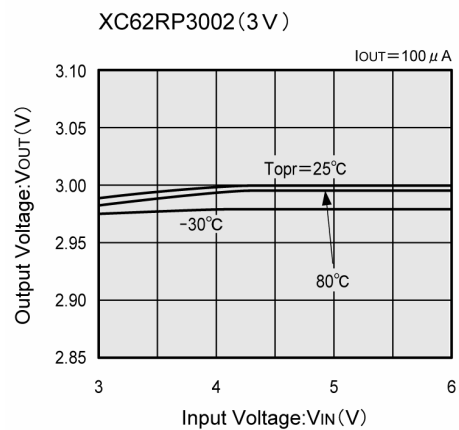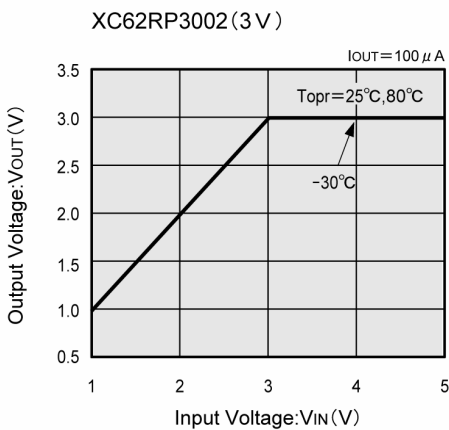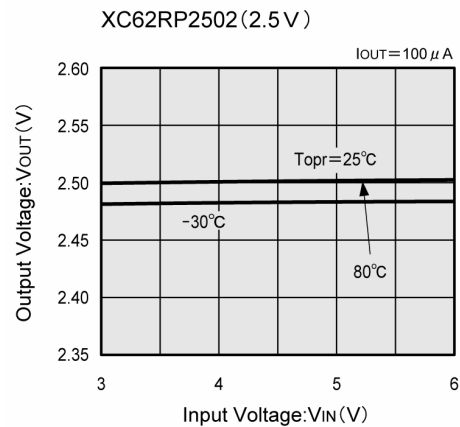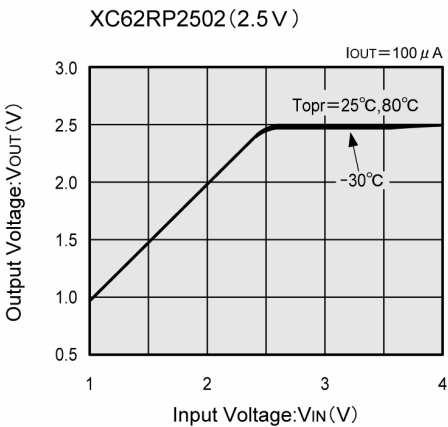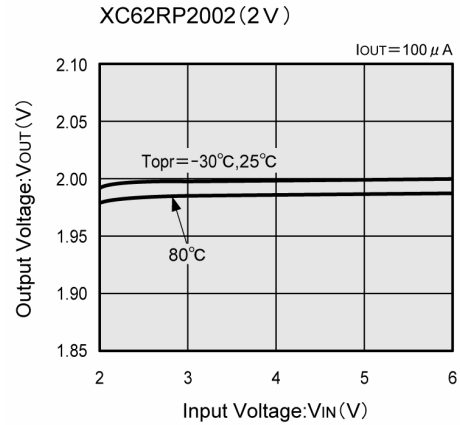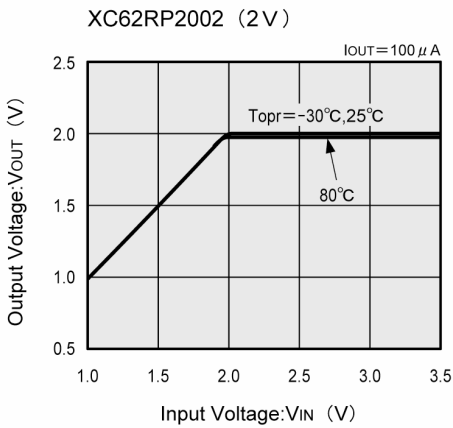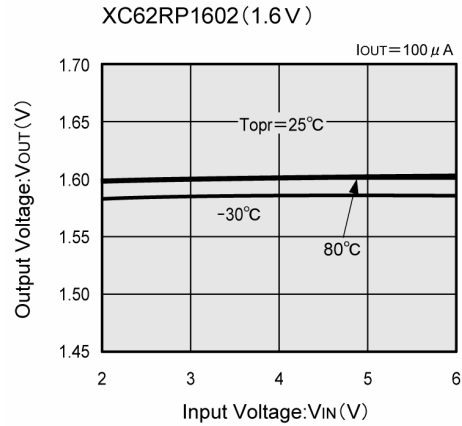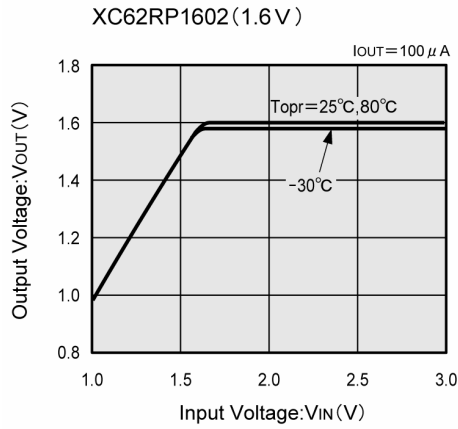





**TYPICAL PERFORMANCE CHARACTERISTICS (Continued)**

**(3) Dropout Voltage vs. Output Current**


XC62RP1602 (1.6 V)

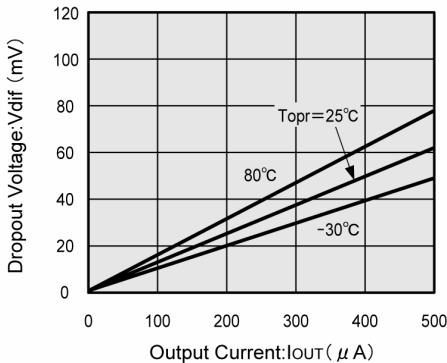


XC62RP2002 (2 V)

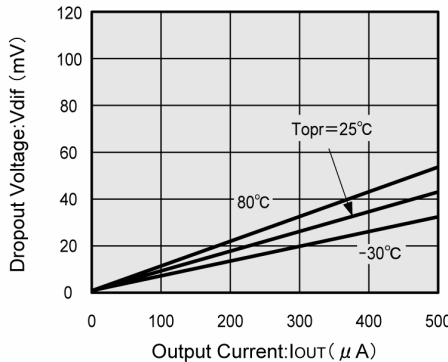

XC62RP2502 (2.5 V)

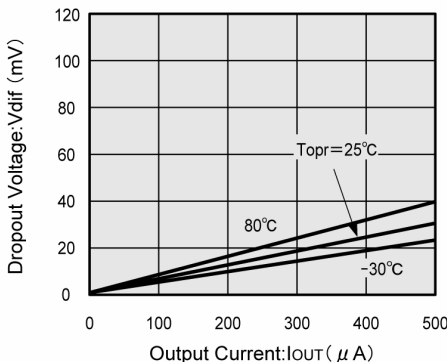


XC62RP3002 (3 V)

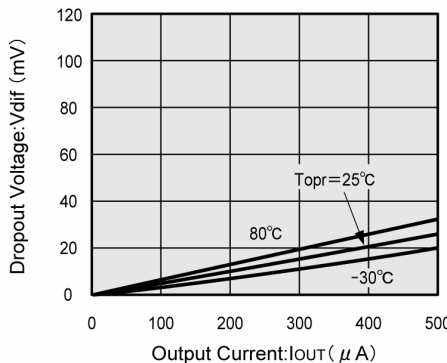


**(4) Supply Current vs. Input Voltage**


XC62RP1602 (1.6 V)

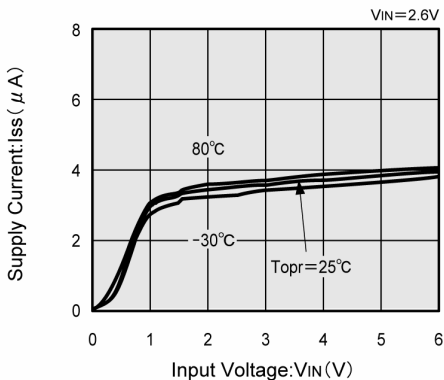


XC62RP2002 (2 V)

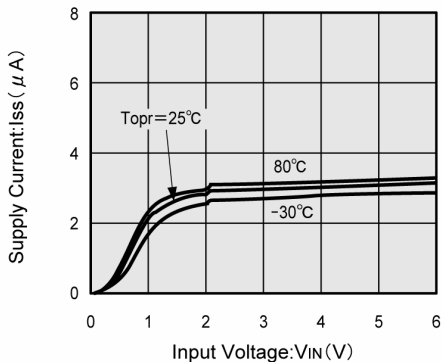

XC62RP2502 (2.5 V)




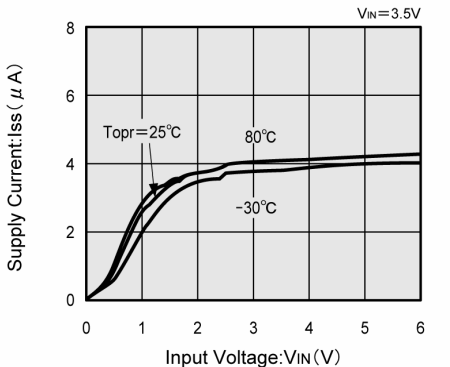


XC62RP3002 (3 V)




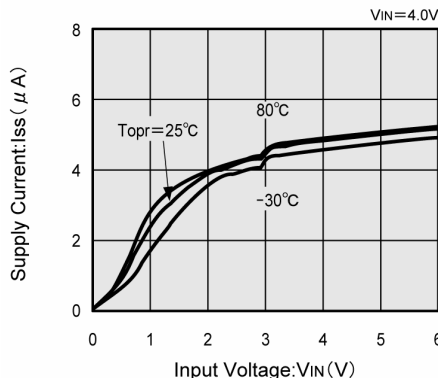


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (5) Output Voltage vs. Ambient Temperature

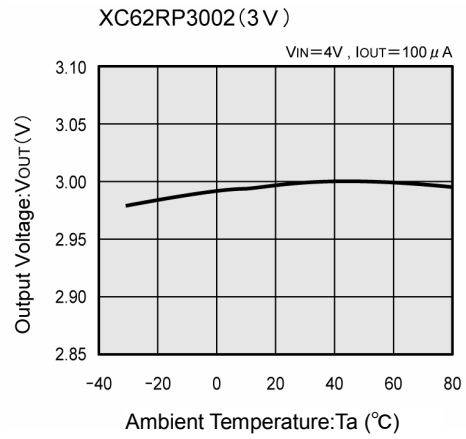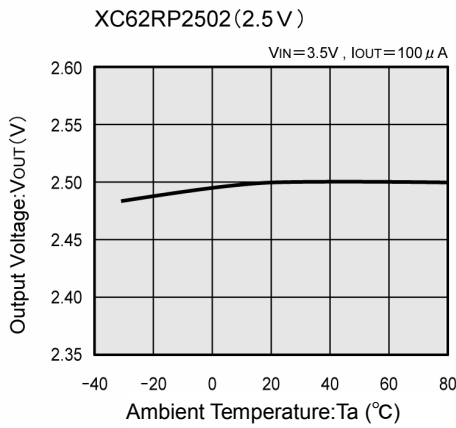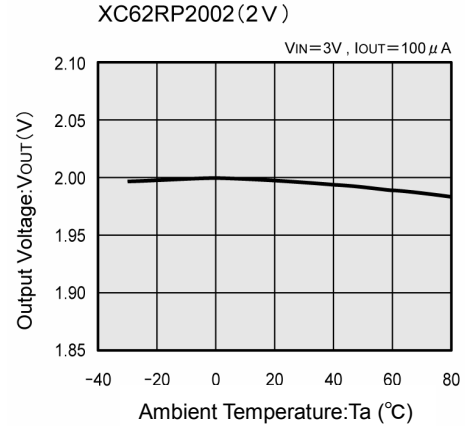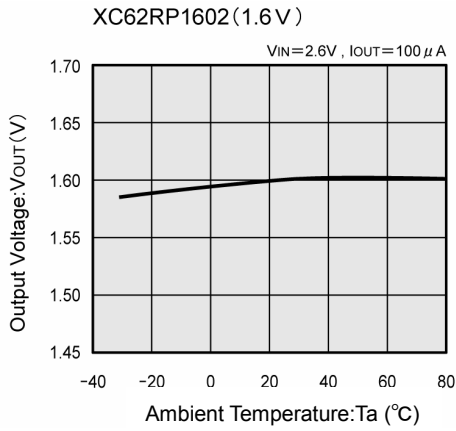


### (6) Supply Current vs. Ambient Temperature

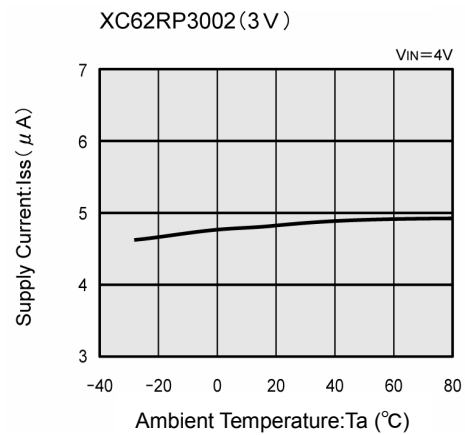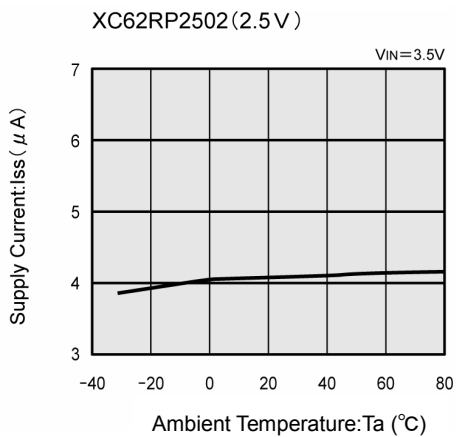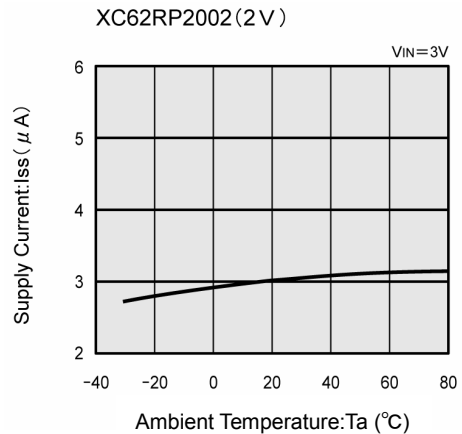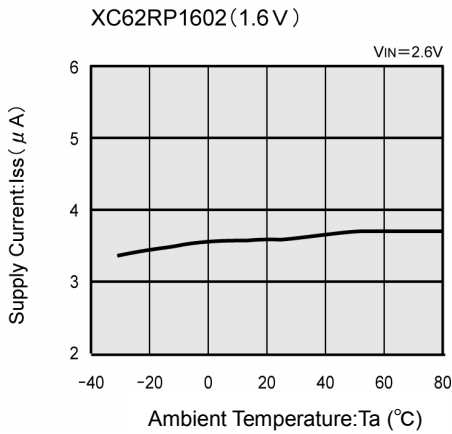


**TYPICAL PERFORMANCE CHARACTERISTICS (Continued)**


**(7) Input Transient Response**

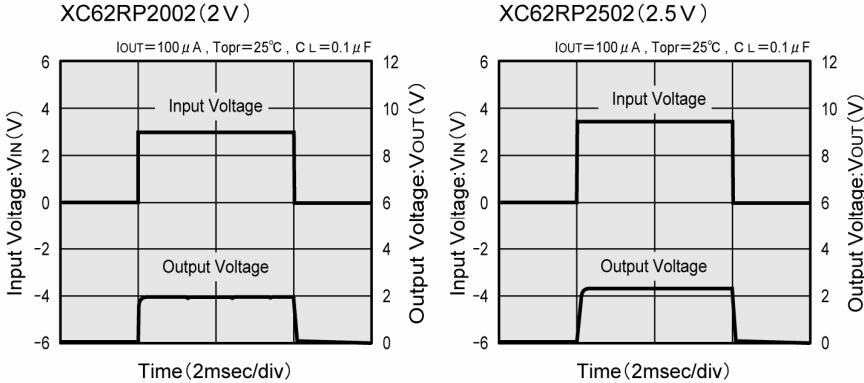


**(8) Input Transient Response 2**

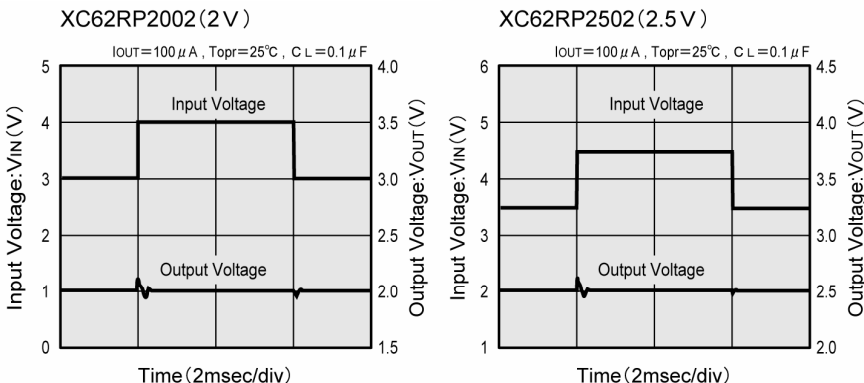

**(9) Load Transient Response**

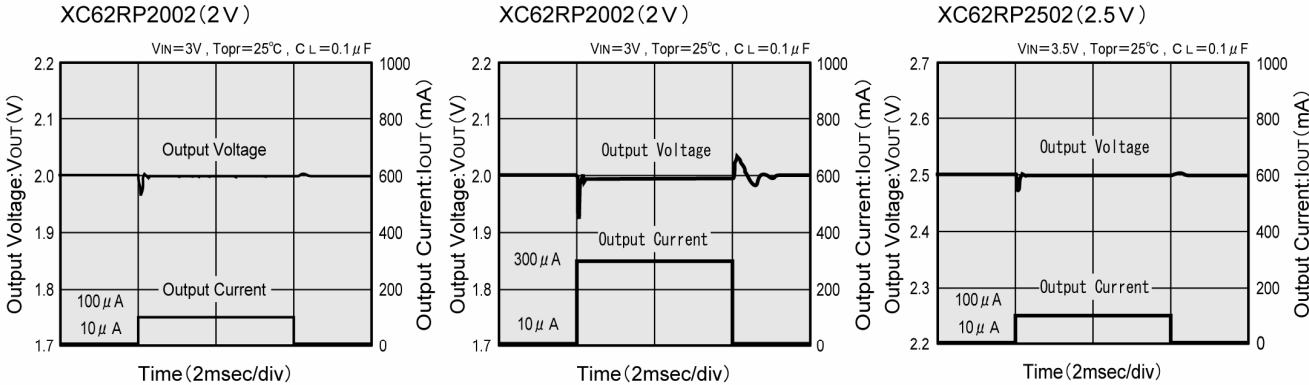


**(10) Ripple Rejection Rate**

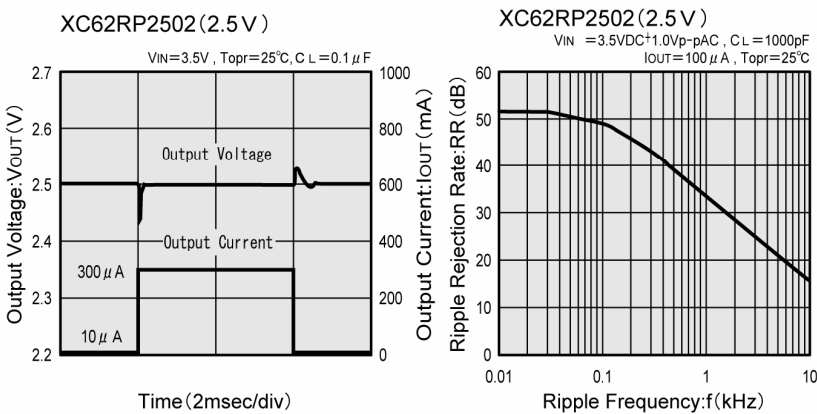


## PACKAGING INFORMATION


### ● SOT-23

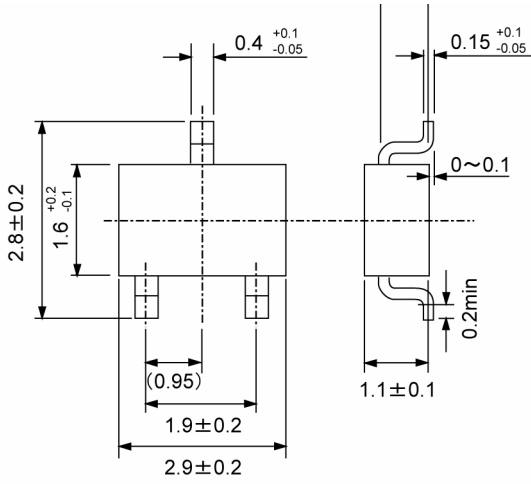

### ● SOT-89

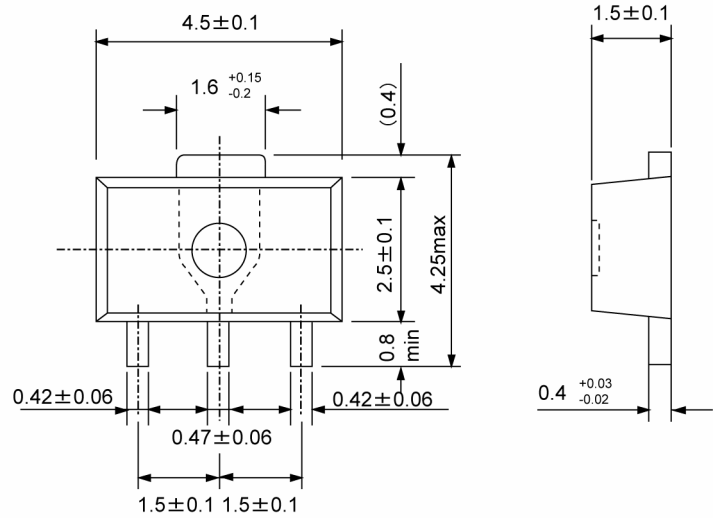


### ● TO-92

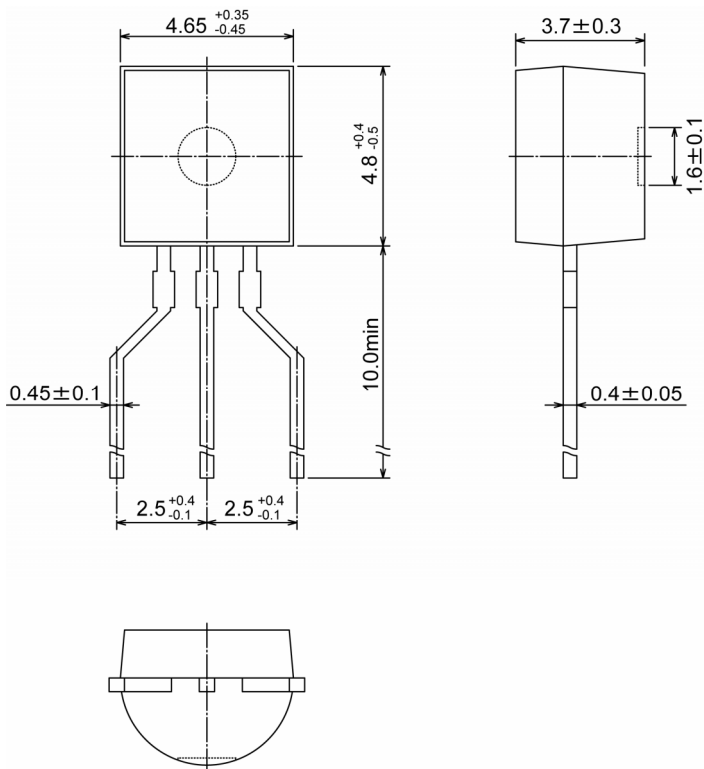


**MARKING RULE**

● SOT-23, SOT-89



SOT-23  
(TOP VIEW)



SOT-89  
(TOP VIEW)

① Not used

② Represents integer of output voltage


MARK	VOLTAGE (V)
A	0.x
B	1.x
C	2.x
D	3.x

③ Represents decimal number of output voltage


MARK	VOLTAGE (V)	MARK	VOLTAGE (V)
A	x.0	F	x.5
B	x.1	H	x.6
C	x.2	K	x.7
D	x.3	L	x.8
E	x.4	M	x.9

④ Represents production lot number  
0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

● TO-92

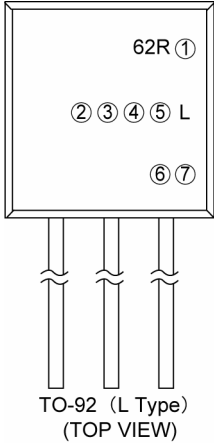

TO-92 (L Type)  
(TOP VIEW)

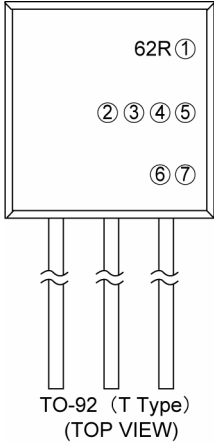

TO-92 (T Type)  
(TOP VIEW)

① Represents polarity of output voltage

MARK	POLARITY
P	+ (Positive)

②③ Represents output voltage

MARK		OUTPUT VOLTAGE (V)
②	③	
3	3	3.3
5	0	5.0

④ Represents temperature characteristics

MARK	TEMPERATURE CHARACTERISTICS
0	±100 ppm (TYP.)

⑤ Represents output voltage accuracy

MARK	OUTPUT VOLTAGE ACCURACY
1	Within ±1% (semi-custom)
2	Within ±2%

⑥ Represents a least significant digit of production year

MARK	PRODUCTION YEAR
3	2003
4	2004

⑦ Represents production lot number  
0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

**TOREX SEMICONDUCTOR LTD.**

单击下面可查看定价，库存，交付和生命周期等信息

[>>Torex Semiconductor\(特瑞仕\)](#)