

# High Isolation Power Transformers

EP7 Platform SMD - PH9185.XXXNL and PM2190.XXXNL



- Push Pull Transformer
- Reinforced insulation for isolated power supply driver
- 8mm creepage
- 5KVrms isolation (1000Vrms continuous)
- UL and TUV certified

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

| Part Number  |                         | Inductance (1-3)<br>(μH ±45%) | Leakage Inductance<br>(μH MAX) | DCR (1-3)<br>(Ω MAX) | DCR (4-6)<br>(Ω MAX) | ET MAX (1-3) <sup>1</sup><br>(V-μsec MAX) | CAP<br>(pF MAX) | Turns Ratio<br>(1:3) (6:4) | Isolated Voltage <sup>2</sup><br>(Vrms) |
|--------------|-------------------------|-------------------------------|--------------------------------|----------------------|----------------------|---|-----------------|----------------------------|---|
| Commercial   | Automotive <sup>8</sup> |                               |                                |                      |                      |   |                 |                            |   |
| PH9185.011NL | PM2190.011NL            | 750                           | 1.2                            | 0.50                 | 0.55                 | 66  | 10.0            | 1CT : 1CT                  | 5000                                    |
| PH9185.012NL | PM2190.012NL            | 450                           | 0.9                            | 0.40                 | 0.80                 | 52  | 10.0            | 1CT : 2CT                  |   |
| PH9185.013NL | PM2190.013NL            | 200                           | 0.6                            | 0.35                 | 0.95                 | 36  | 8.0             | 1CT : 3CT                  |   |
| PH9185.021NL | PM2190.021NL            | 1800                          | 3.0                            | 0.75                 | 0.45                 | 100                                       | 10.0            | 2CT : 1CT                  |   |
| PH9185.034NL | PM2190.034NL            | 750                           | 1.2                            | 0.50                 | 0.75                 | 66  | 10.0            | 3CT : 4CT                  |   |
| PH9185.038NL | PM2190.038NL            | 310                           | 0.9                            | 0.44                 | 1.00                 | 44  | 8.0             | 3CT : 8CT                  |   |
| PH9185.043NL | PM2190.043NL            | 1260                          | 1.5                            | 0.70                 | 0.56                 | 89  | 12.0            | 4CT : 3CT                  |   |
| PH9185.083NL | PM2190.083NL            | 2350                          | 6.0                            | 0.90                 | 0.40                 | 110                                       | 8.0             | 8CT : 3CT                  |   |



### Notes:

- The ET Max is calculated to limit the core loss and temperature rise at 100KHz based on a bipolar flux swing of 180mT Peak.
- For Push-Pull topology, where the voltage is applied across half the primary winding turns, the ET needs to be derated by 50% for the same flux swing.
- The applied ET may need to be further derated for higher frequencies based on the temperature rise which results from the core and copper losses
  - To calculate total copper loss (W), use the following formula:  
 $Copper\ Loss\ (W) = I_{rms\_Primary}^2 * DCR\_Primary + I_{rms\_Secondary}^2 * DCR\_Secondary$
  - To calculate total core loss (W), use the following formula:  
 $Core\ Loss\ (W) = 4.40E-10 * (Frequency\ in\ kHz)^{1.67} * (180 * [ET/ET\ Max])^{2.55}$   
 Where ET is the applied Volt Second, ET Max is the rated Volt Second for 180mT flux swing
  - To calculate temperature rise, use the following formula:  $Temperature\ Rise\ (°C) = 90 * (Core\ Loss(W) + Copper\ Loss\ (W))$
- The AEC-Q200 temperature and humidity operational life testing was completed using a dielectric strength test of 5000Vdc.
- Optional Tape & Reel packing can be ordered by adding a "T" suffix to the part number (i.e. PH9185.012NL becomes PH9185.012NLT). Pulse complies to industry standard tape and reel specification EIA481.
- The "NL" suffix indicates an RoHS-compliant part number.
- Continuous isolation voltage confirmed by 125°C/1000hrs accelerated aging with the bias voltage applied between primary and secondary windings.
- The PM2190.XXXNL part numbers are AEC-Q200 and IATF16949 certified. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) >1.33 and therefore may not strictly conform to PPAP.

## Mechanical

## Schematic

### PH9185.XXXNL/PM2190.XXXNL

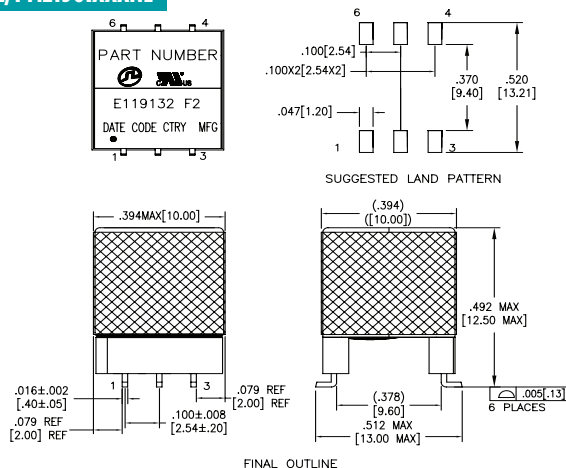

**Weight** .....2.6grams  
**Tape & Reel** .....150/reel  
**Tray** .....80/tray


**Dimensions:** Inches  
mm

Unless otherwise specified,  
all tolerances are ±  $\frac{.010}{0.25}$

# High Isolation Power Transformers

EP7 Platform SMD - PH9185.XXXNL and PM2190.XXXNL

## TAPE & REEL INFO

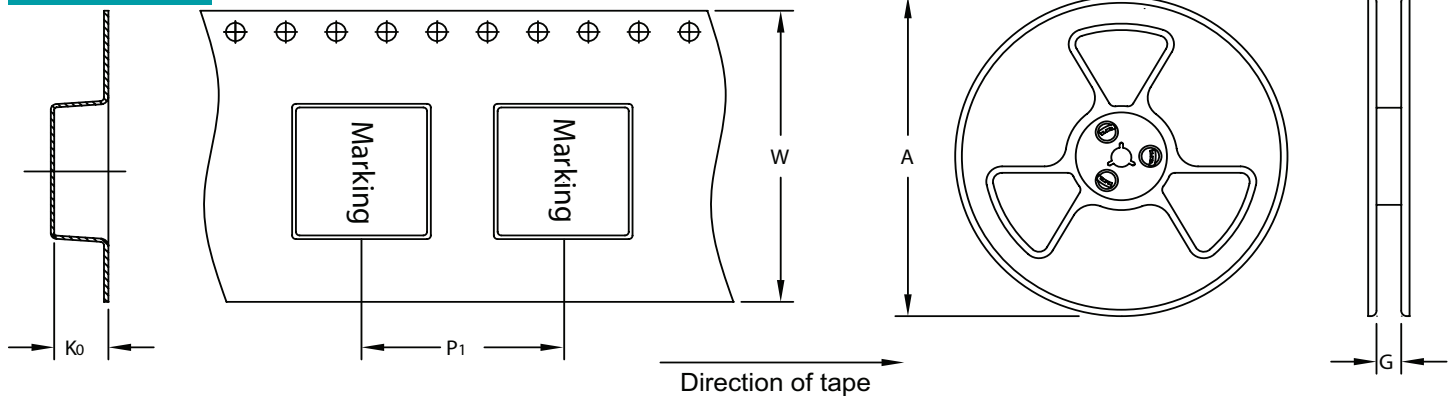


SURFACE MOUNTING TYPE, REEL/TAPE LIST

| PART NUMBER               | REEL SIZE (mm) |      | TAPE SIZE (mm) |    |                | QTY      |
|---------------------------|----------------|------|----------------|----|----------------|----------|
|                           | A              | G    | P <sub>1</sub> | W  | K <sub>0</sub> | PCS/REEL |
| PH9185.XXXNL/PM2190.XXXNL | Ø330           | 32.4 | 24             | 32 | 12.8           | 150      |

## APPLICATION

PH9185.XXXNL is a series of high isolation power supply transformer drivers. Intended to operate in a fixed duty cycle Push Pull topology, it is a part of a low cost solution for delivering lower power (up to 3W) from a low voltage source. A typical implementation would be an isolated RS-485/RS-232 power supply driver circuit, the design is compatible with the MAXIM™ MAX253 IC.

A schematic diagram for the Push Pull converter topology is given below.

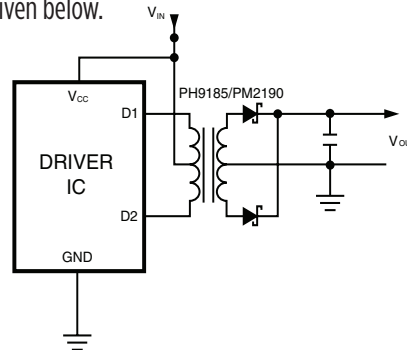

For a fixed 50% duty cycle mode of operation, the output voltage is simply determined by the input voltage and turns ratio. So, with the available turns ratios, a variety of output voltages can be selected.

This transformer design has been certified by UL to comply with UL60950-1 2<sup>nd</sup> edition, and CAN/CSA C22.2 NO. 60950-1-07 2<sup>nd</sup> edition; and by TUV to comply with EN61558-1 and EN61558-2-16 with reinforced insulation for a working voltage up to 400Vac 8mm creepage and 5000Vrms isolation voltage is guaranteed to meet this requirement. The design also complies with the Pulse's class F insulation system. PH9185.013NL was not included in the original UL/TUV certification but is compliant. Cost reduced versions without UL/TUV certification available, please contact Pulse Electronics for more information.

MAXIM is a registered trademark of Maxim Integrated Products.

## For More Information

### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

### Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

### Pulse South Asia

3 Fraser Street  
0428 DUO Tower  
Singapore 189352

### Pulse North Asia

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 858 674 8100

Fax: 858 674 8262

Tel: 49 2354 777 100

Fax: 49 2354 777 168

Tel: 86 755 33966678

Fax: 86 755 33966700

Tel: 86 21 62787060

Fax: 86 2162786973

Tel: 65 6287 8998

Fax: 65 6280 0080

Tel: 886 3 4356768

Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse Electronics\(普思\)](#)