



RF360
Europe GmbH

SAW components

SAW diplexer

Automotive telematics
TD-SCDMA bands 34 & 39

Series/type:	B4372
Ordering code:	B39202B4372P810
Date:	March 28, 2017
Version:	2.0

DCN: 80-PA243-545 Rev. A

RF360 products mentioned within this document are products of RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the "RF360 Subsidiaries").

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2019 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.


These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

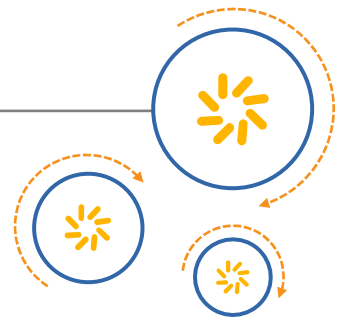

RF360 Europe GmbH
A Qualcomm – TDK Joint Venture

SAW components

SAW diplexer

Automotive telematics
TD-SCDMA bands 34 & 39

Series/type:	B4372
Ordering code:	B39202B4372P810
Date:	March 28, 2017
Version:	2.0

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”).

RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2017 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

SAW components	B4372
SAW diplexer	1900 / 2017.5 MHz

Data sheet

Table of contents

1 Application	4
2 Features	4
3 Package	5
4 Pin configuration	5
5 Matching circuit	6
6 Characteristics TD-SCDMA B34	7
7 Characteristics TD-SCDMA B39	8
8 Maximum ratings	9
9 Transmission coefficient TD-SCDMA B34	10
10 Reflection coefficients TD-SCDMA B34	11
11 Transmission coefficient TD-SCDMA B39	12
12 Reflection coefficients TD-SCDMA B39	13
13 Packing material	14
14 Marking	17
15 Soldering profile	18
16 Annotations	19
17 Cautions and warnings	20
Important notes	21

Data sheet

1 Application

- Low-loss 2in1 RF filter for TD-SCDMA band 34 and TD-SCDMA band 39 systems
- TD-SCDMA B34: 15MHz
- TD-SCDMA B39: 40MHz
- Unbalanced to unbalanced operation for both filters
- Low amplitude ripple
- Component can be used bidirectionally as output(s) can also be used as input(s).

2 Features

- Package size $2.0 \pm 0.1 \text{ mm} \times 1.6 \pm 0.1 \text{ mm}$
- Package height 0.45 mm (max.)
- Approximate weight 6 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Filter surface passivated
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 2a (MSL2a)
- AEC-Q200 qualified component family (Grade 3: $-40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)



Figure 1: Picture of component with example of product marking.


SAW components **B4372**

SAW diplexer **1900 / 2017.5 MHz**

Data sheet


3 Package

BOTTOM VIEW

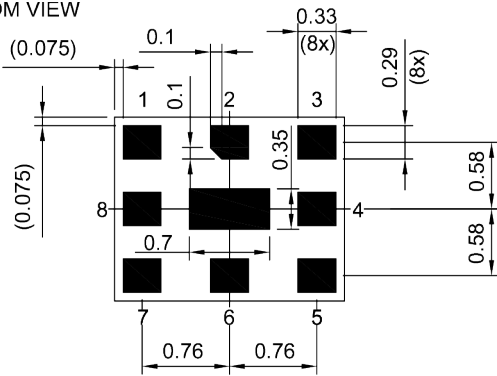


Pad and pitch tolerance ±0.05

SIDE VIEW




TOP VIEW

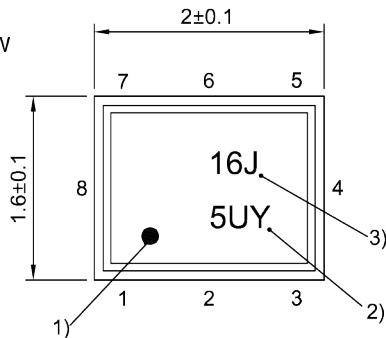

- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

Land pattern THRU VIEW

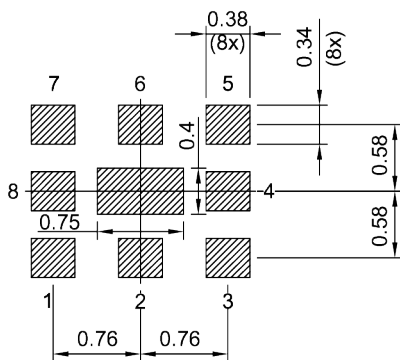

Landing pad tolerance -0.02

4 Pin configuration¹⁾

- 1 Output (B39)
- 3 Output (B34)
- 6 Input (B34 & B39)
- 2, 4, 5, 7, 8, 9 Ground

¹⁾ Note that the component can be used bidirectionally as output(s) can also be used as input(s).

Figure 2: Drawing of package with package height A = 0.45 mm (max.). See Sec. Package information (p. 20).

Data sheet

5 Matching circuit

■ $L_{p6} = 4.3 \text{ nH}$

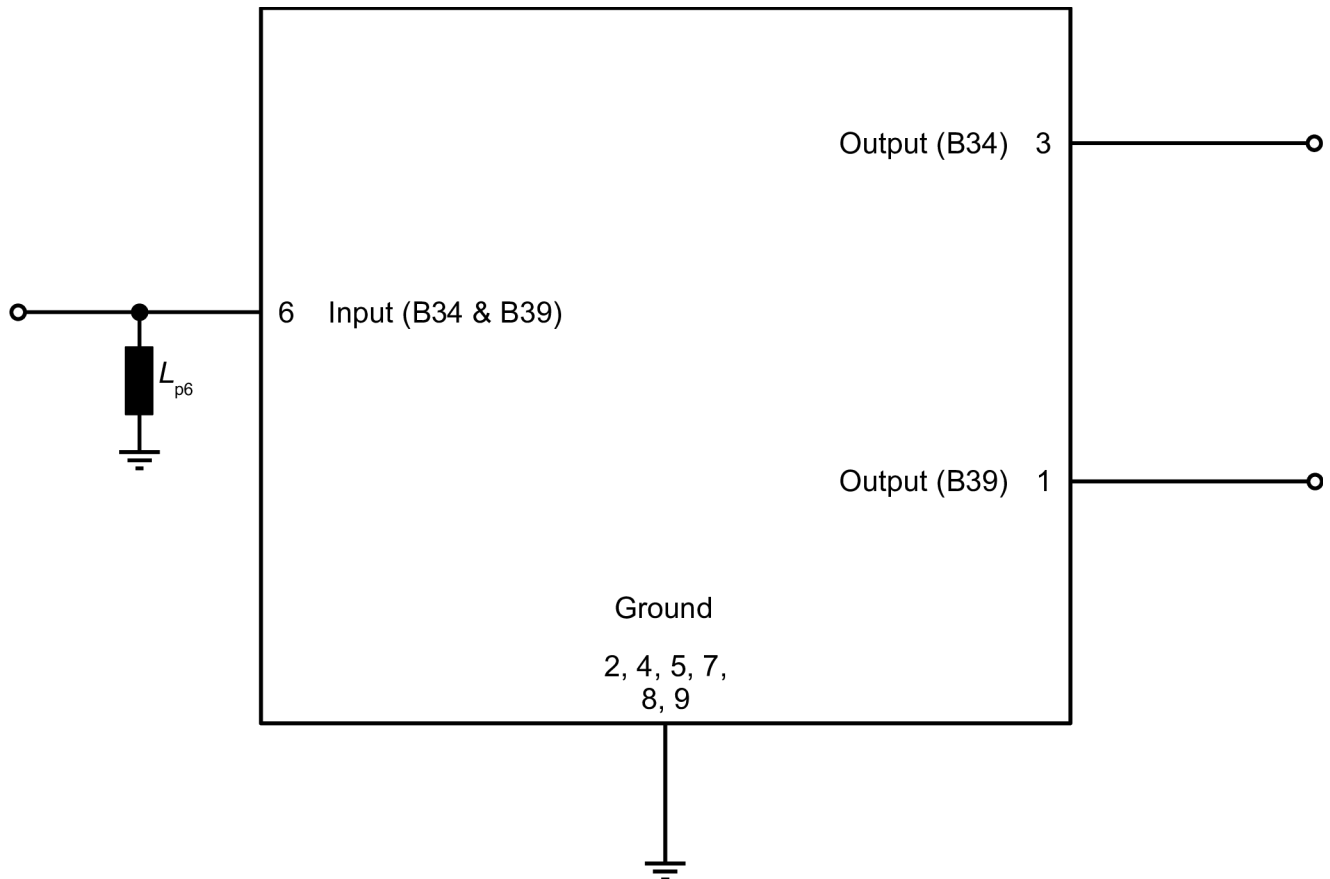


Figure 3: Schematic of matching circuit.

Note that the component can be used bidirectionally as output(s) can also be used as input(s).

SAW components

B4372

SAW diplexer

1900 / 2017.5 MHz

Data sheet

6 Characteristics TD-SCDMA B34

Temperature range for specification	T_{SPEC}	= -40 °C ... +85 °C
Input terminating impedance	Z_{IN}	= 50 Ω with par. 4.3 nH ¹⁾
B34 output terminating impedance	$Z_{B34 OUT}$	= 50 Ω
B39 output terminating impedance	$Z_{B39 OUT}$	= 50 Ω

Characteristics TD-SCDMA B34			min. for T_{SPEC}	typ. @ +25 °C	max. for T_{SPEC}	
Center frequency		f_C	—	2017.5	—	MHz
Maximum insertion attenuation	2010... 2025	MHz	—	1.5	1.9	dB
Amplitude ripple (p-p)	2010... 2025	MHz	—	0.2	0.6	dB
Maximum VSWR						
@ input port	2010... 2025	MHz	—	1.3	1.7	
@ B34 output port	2010... 2025	MHz	—	1.3	1.7	
Minimum attenuation						
	50... 869	MHz	40	46	—	dB
	869... 894	MHz	40	45	—	dB
	925... 960	MHz	40	44	—	dB
	1805... 1850	MHz	35	45	—	dB
	2110... 2170	MHz	38	43	—	dB
	2400... 2500	MHz	35	42	—	dB
	4020... 4050	MHz	38	45	—	dB
	6030... 6075	MHz	25	36	—	dB

¹⁾ See Sec. Matching circuit (p. 6).

SAW components

B4372

SAW diplexer

1900 / 2017.5 MHz

Data sheet

7 Characteristics TD-SCDMA B39

Temperature range for specification	T_{SPEC}	= -40 °C ... +85 °C
Input terminating impedance	Z_{IN}	= 50 Ω with par. 4.3 nH ¹⁾
B34 output terminating impedance	$Z_{B34 OUT}$	= 50 Ω
B39 output terminating impedance	$Z_{B39 OUT}$	= 50 Ω

Characteristics TD-SCDMA B39				min. for T_{SPEC}	typ. @ +25 °C	max. for T_{SPEC}	
Center frequency			f_C	—	1900	—	MHz
Maximum insertion attenuation	1880... 1920	MHz	α_{max}	—	1.6	2.4	dB
Amplitude ripple (p-p)	1880... 1920	MHz	$\Delta\alpha$	—	0.5	1.3	dB
Maximum VSWR			$VSWR_{max}$				
@ input port	1880... 1920	MHz		—	1.5	2.0	
@ B39 output port	1880... 1920	MHz		—	1.4	2.0	
Minimum attenuation			α_{min}				
	50... 869	MHz		38	43	—	dB
	869... 894	MHz		38	43	—	dB
	925... 960	MHz		38	42	—	dB
	1805... 1830	MHz		43	48	—	dB
	1830... 1850	MHz		35	44	—	dB
	2110... 2170	MHz		35	39	—	dB
	2400... 2500	MHz		35	39	—	dB
	2496... 2690	MHz		34	38	—	dB
	3760... 3840	MHz		40	49	—	dB
	5640... 5760	MHz		33	48	—	dB

¹⁾ See Sec. Matching circuit (p. 6).

SAW components

B4372

SAW diplexer

1900 / 2017.5 MHz

Data sheet

8 Maximum ratings

Operable temperature	$T_{OP} = -40\text{ °C} \dots +85\text{ °C}$	
Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +85\text{ °C}$	
DC voltage	$ V_{DC} ^{2)} = 0\text{ V}$	
Input power	P_{IN}	
@ B39 port: 1880 ... 1920 MHz	29 dBm	LTE 5 MHz Uplink for 5000 h @ 55 °C.
@ B34 port: 2010 ... 2025 MHz	29 dBm	LTE 5 MHz Uplink for 5000 h @ 55 °C.

¹⁾ Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

²⁾ In case of applied DC voltage blocking capacitors are mandatory.

Data sheet

9 Transmission coefficient TD-SCDMA B34

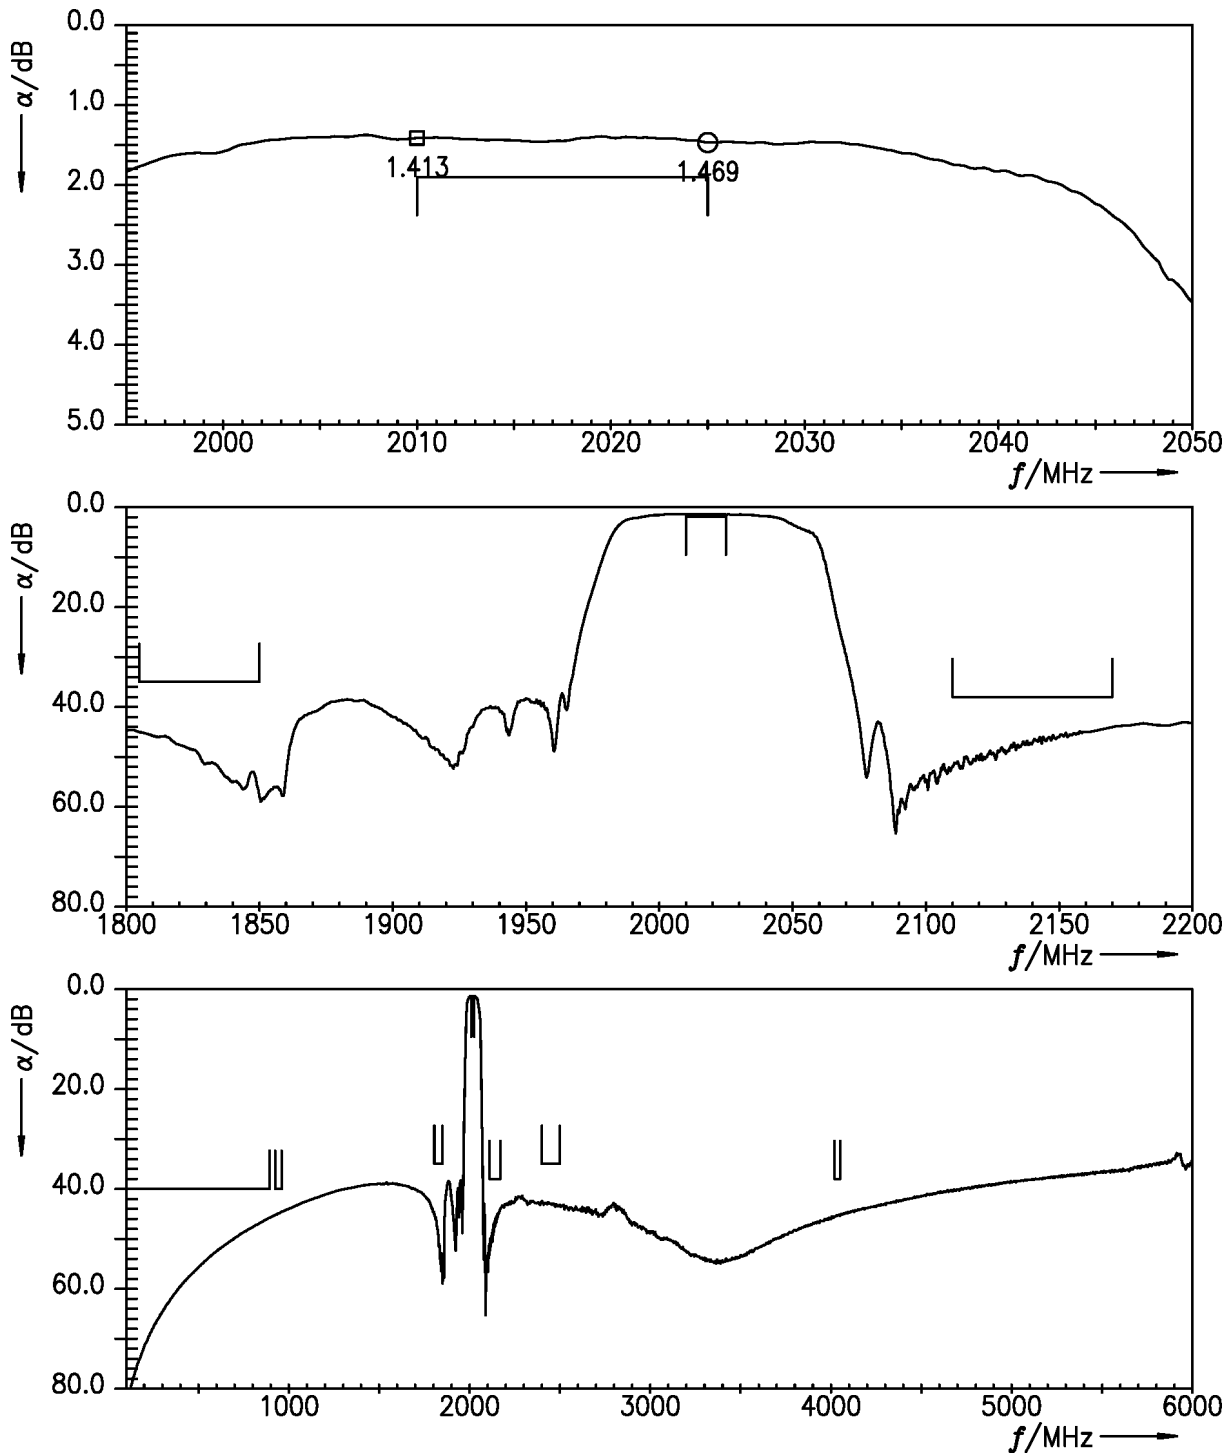


Figure 4: Attenuation TD-SCDMA B34.

Data sheet

10 Reflection coefficients TD-SCDMA B34

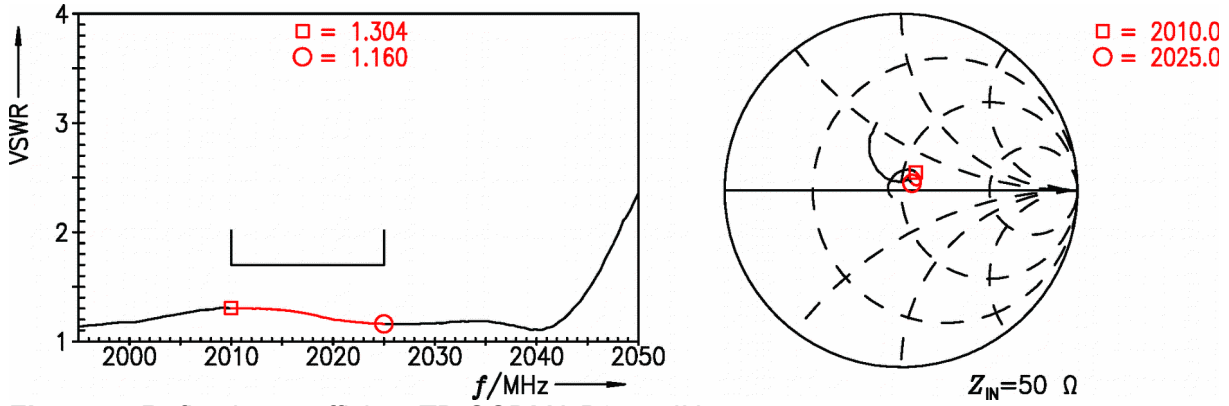


Figure 5: Reflection coefficient TD-SCDMA B34 at IN port.

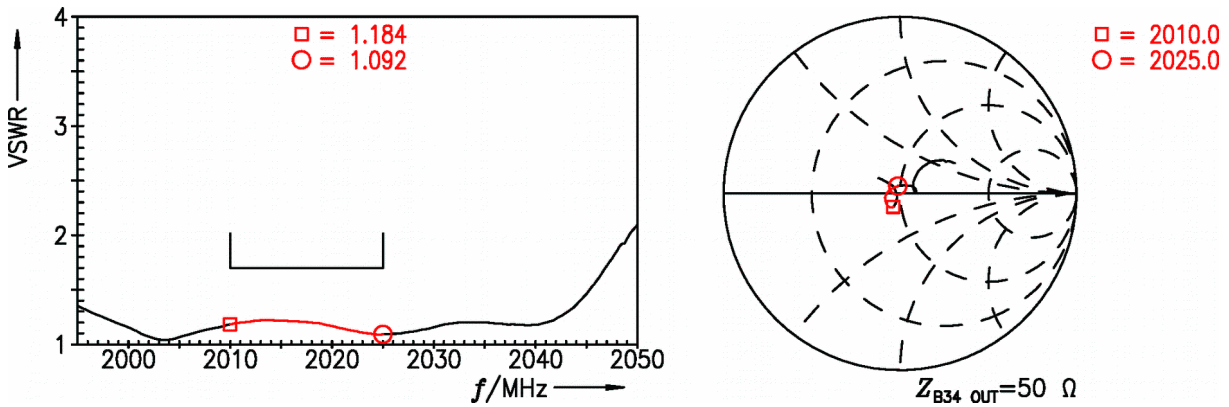


Figure 6: Reflection coefficient TD-SCDMA B34 at OUT port.

Data sheet

11 Transmission coefficient TD-SCDMA B39

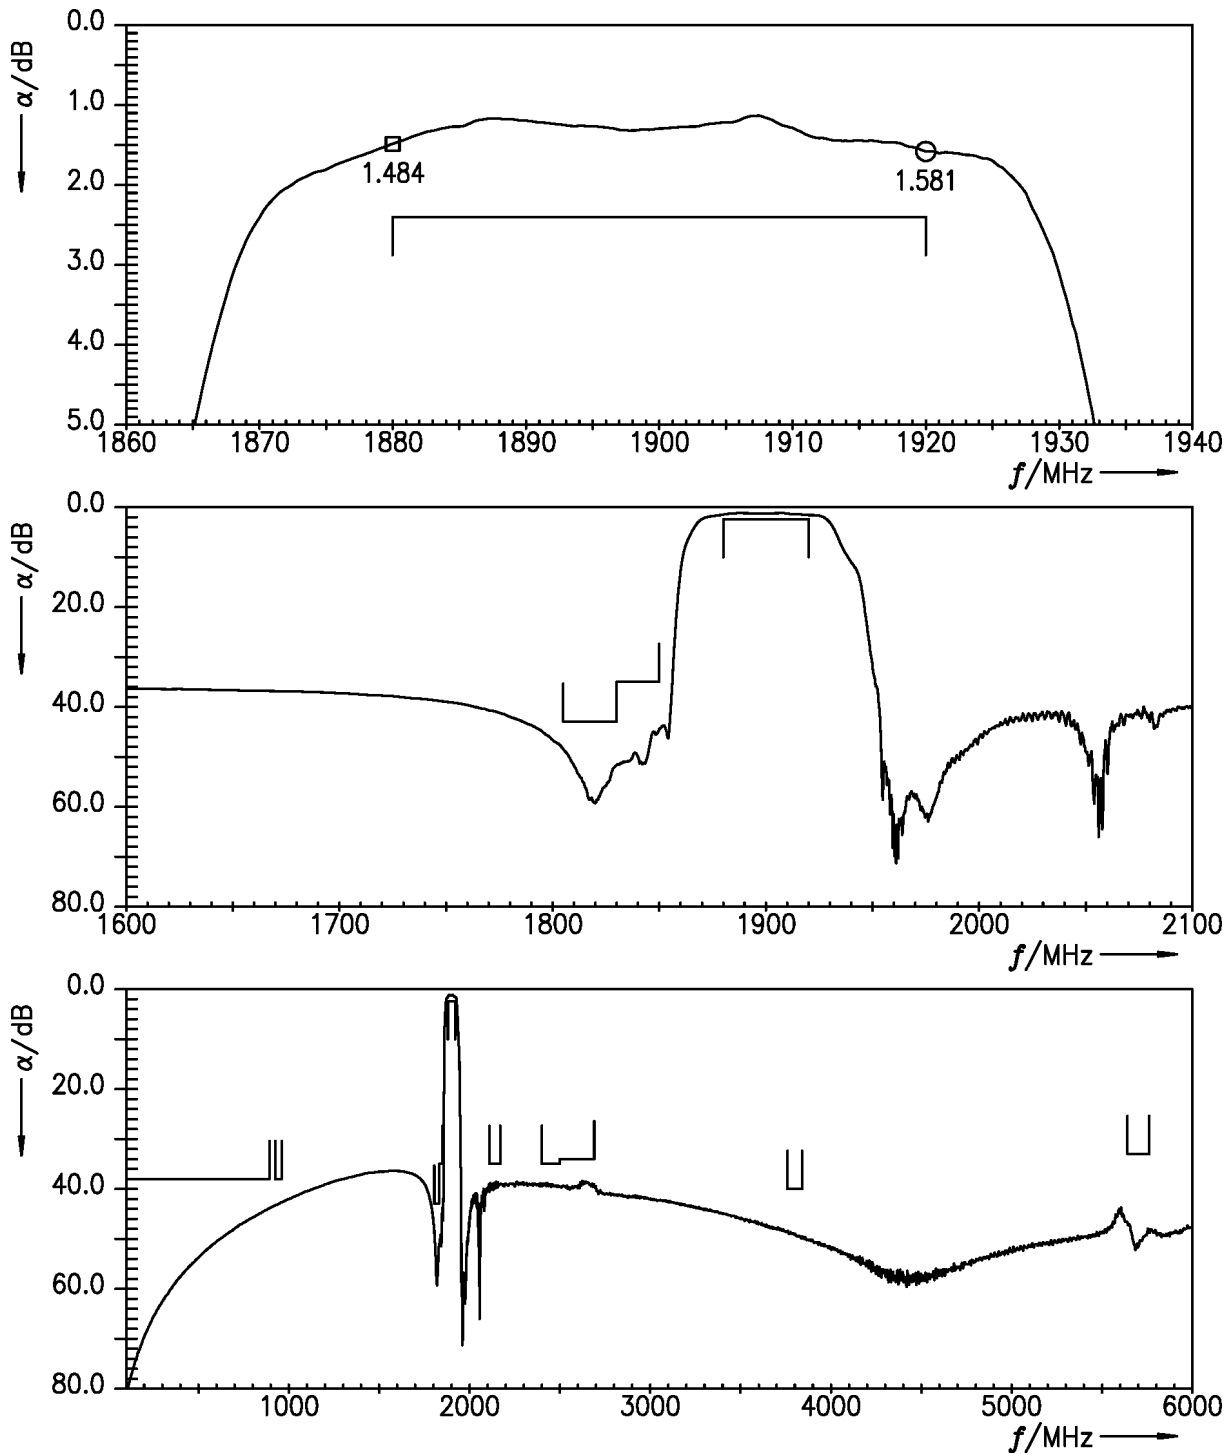


Figure 7: Attenuation TD-SCDMA B39.

Data sheet

12 Reflection coefficients TD-SCDMA B39

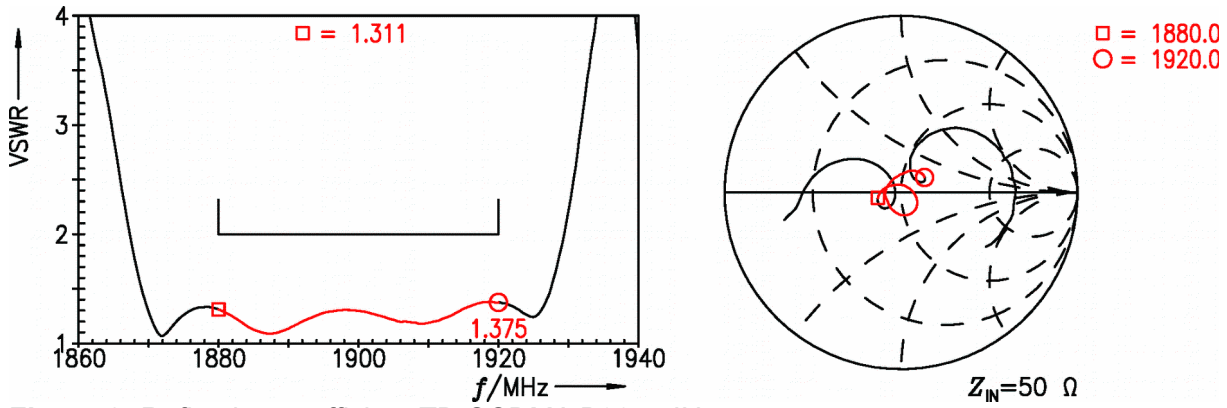


Figure 8: Reflection coefficient TD-SCDMA B39 at IN port.

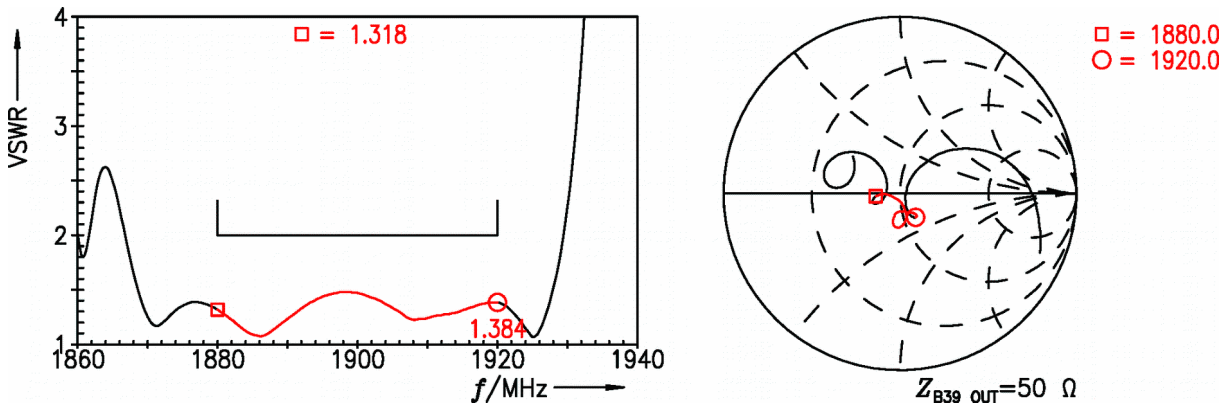


Figure 9: Reflection coefficient TD-SCDMA B39 at OUT port.

SAW components **B4372**
SAW diplexer **1900 / 2017.5 MHz**

Data sheet

13 Packing material

13.1 Tape

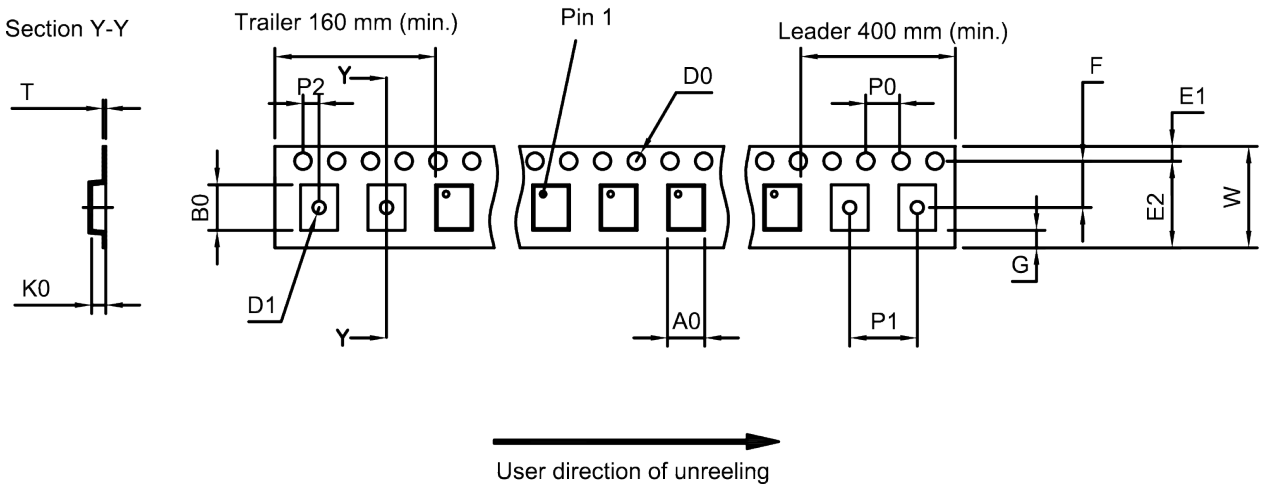


Figure 10: Drawing of tape (first-angle projection) with tape dimensions according to Table 1.

A ₀	1.8±0.05 mm	E ₂	6.25 mm (min.)	P ₁	4.0±0.1 mm
B ₀	2.25±0.05 mm	F	3.5±0.05 mm	P ₂	2.0±0.05 mm
D ₀	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.03 mm
D ₁	1.0 mm (min.)	K ₀	0.6±0.05 mm	W	8.0+0.3/-0.1 mm
E ₁	1.75±0.1 mm	P ₀	4.0±0.1 mm		

Table 1: Tape dimensions.

SAW components **B4372**
SAW diplexer **1900 / 2017.5 MHz**

Data sheet

13.2 Reel with diameter of 180 mm

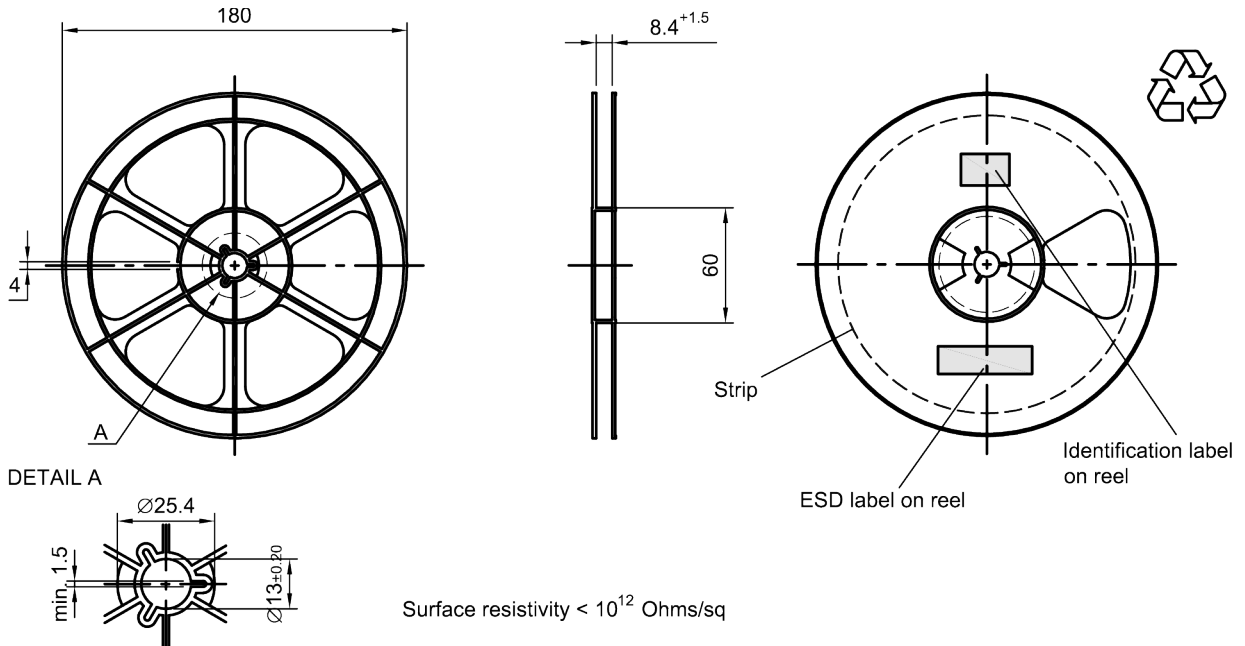


Figure 11: Drawing of reel (first-angle projection) with diameter of 180 mm.

Dimensions [mm]
 X = 220+5
 Y = 235+5
 Sealing area 10±3

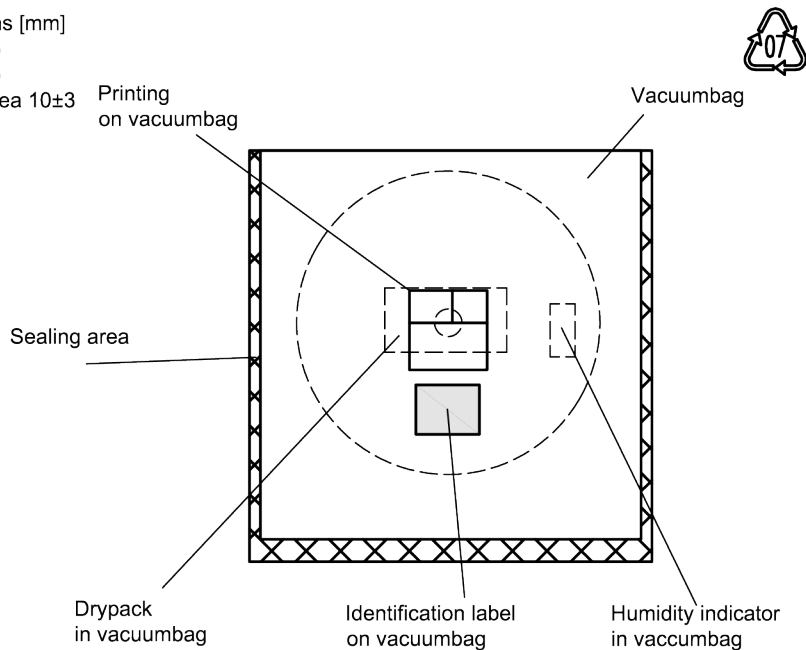


Figure 12: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

SAW components B4372

SAW diplexer 1900 / 2017.5 MHz

Data sheet

Dimensions [mm]

L = 188

B = 188

H = 30

Tolerance ±5

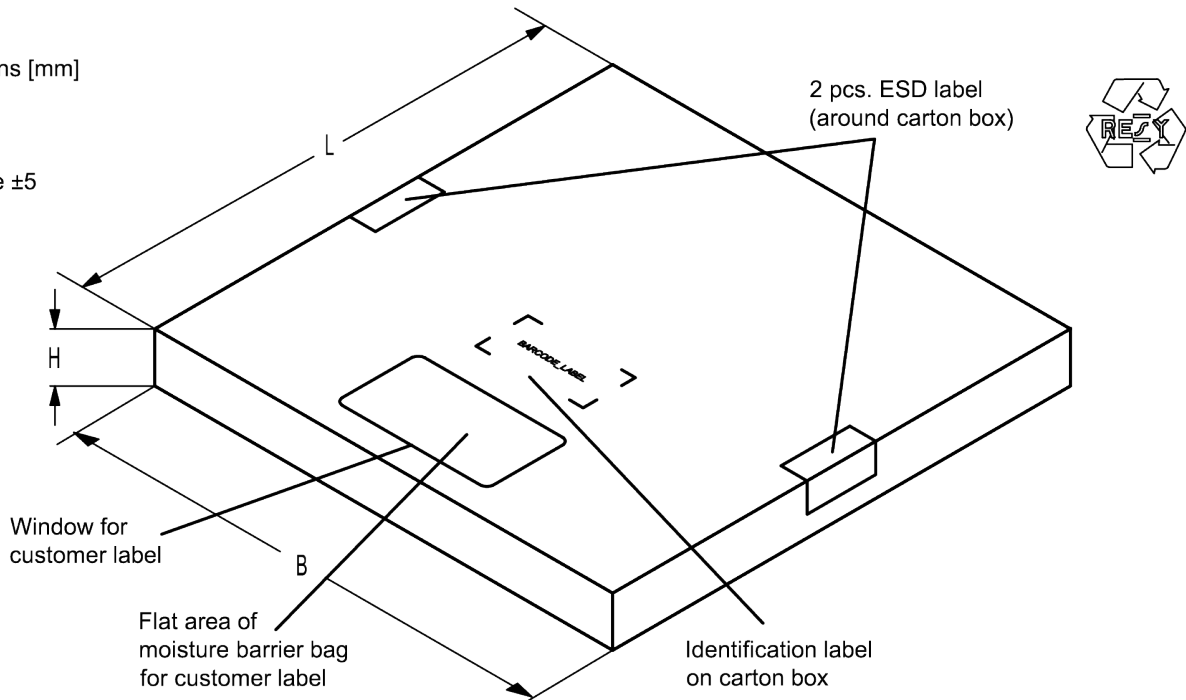


Figure 13: Drawing of folding box for reel with diameter of 180 mm.

Data sheet

14 Marking

Products are marked with product type number and lot number encoded according to Table 2:

■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx,
is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding	type number marking on device	in decimal code.
	16J	1234
	$1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0$	1234

The BASE32 code for product type B4372 is 48M.

■ Lot number:

The last 5 digits of the lot number, e.g., **12345**,
are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device		in decimal code.
	5UY	12345
	$5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0$	12345

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		

Table 2: Lists for encoding and decoding of marking.

Data sheet

15 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3rd edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
$T > 220$ °C	30 s to 70 s
$T > 230$ °C	min. 10 s
$T > 245$ °C	max. 20 s
$T \geq 255$ °C	–
peak temperature T_{peak}	250 °C +0/-5 °C
wetting temperature T_{min}	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature T	measured at solder pads

Table 3: Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

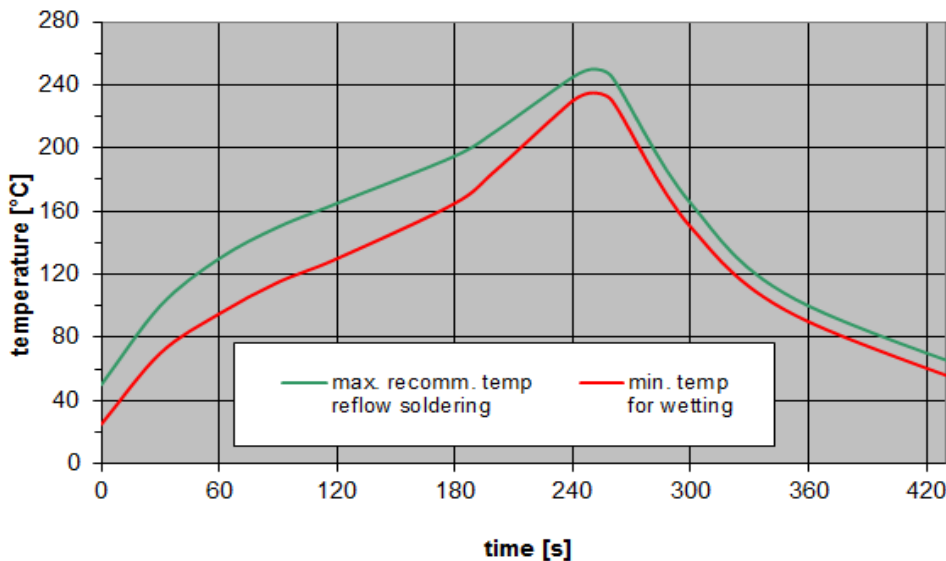


Figure 14: Recommended reflow profile for convection and infrared soldering – lead-free solder.

Data sheet

16 Annotations

16.1 Matching coils

See TDK inductor pdf-catalog <http://www.tdk.co.jp/tefe02/coil.htm#aname1> and Data Library for circuit simulation <http://www.tdk.co.jp/etvcl/index.htm>.

16.2 RoHS compatibility

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

16.3 Scattering parameters (S-parameters)

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

Data sheet

17 Cautions and warnings

17.1 Display of ordering codes for RF360 products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under www.rf360jv.com/orderingcodes.

17.2 Material information

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

17.3 Moldability

Before using in overmolding environment, please contact your local RF360 sales office.

17.4 Package information

Landing area

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

Dimensions

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

Dimensions do not include burrs.

Projection method

Unless otherwise specified first-angle projection is applied.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.rf360jv.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)