



RF360  
Europe GmbH

## Data sheet

SAW duplexer  
LTE / 5G band 26/5

Part number:	B1268
Ordering code:	B39871B1268L210
Date:	December 20, 2021
Version:	2.2

DCN: 80-PA243-478 Rev. C

Qualcomm products mentioned herein are products of Qualcomm Technologies, Inc. and/or its subsidiaries.

RF360 Europe GmbH  
Anzinger Straße 13  
81671 Munich, Germany

© 2021 Qualcomm Technologies, Inc. and/or its subsidiaries. All rights reserved

These materials, including the information contained herein, may be used only for informational purposes by the customer. Qualcomm Technologies, Inc. and/or its subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein and reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, without warranty, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark or registered trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

**Table of contents**

1 [Application](#)..... 4  
2 [Features](#)..... 4  
3 [Package](#)..... 5  
4 [Pin configuration](#)..... 5  
5 [Matching circuit](#)..... 6  
6 [Characteristics](#)..... 7  
7 [Maximum ratings](#)..... 11  
8 [Transmission coefficients](#)..... 12  
9 [Reflection coefficients](#)..... 15  
10 [Packing material](#)..... 16  
11 [Marking](#)..... 20  
12 [Soldering profile](#)..... 21  
13 [Annotations](#)..... 22  
14 [Cautions and warnings](#)..... 23  
15 [Important notes](#)..... 24

## 1 Application


- Duplexer for 4G and 5G Band 26/5
- LTE band 26 uplink: 831.5 MHz (pass band 35 MHz)
- LTE band 26 downlink: 876.5 MHz (pass band 35 MHz)
- Qualcomm® micro-Acoustic Power Management (MAPM)
- Low insertion attenuation
- Low amplitude ripple

## 2 Features

- Package size  $1.6_{\pm 0.05}$  mm  $\times$   $1.2_{\pm 0.05}$  mm
- Package height 0.6 mm (max.)
- Approximate weight 3 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Filter surface passivated
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 3 (MSL3)


### 3 Package

BOTTOM VIEW

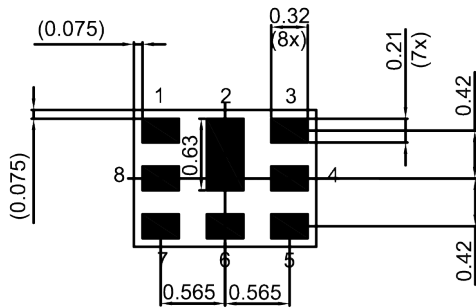


Pad and pitch tolerance  $\pm 0.05$

SIDE VIEW

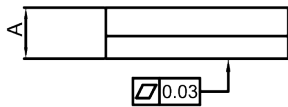


TOP VIEW

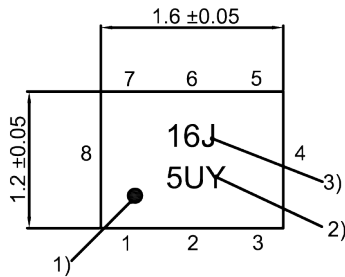

- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

Land pattern  
THRU VIEW

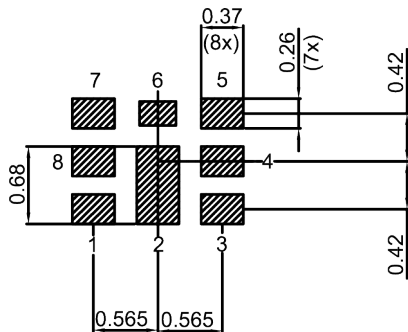

Landing pad tolerance  $-0.02$

**Figure 1:** Drawing of package with package height A = 0.6 mm (max.). See Sec. Package information (p. 23).

### 4 Pin configuration

- 1            RX
- 3            TX
- 6            ANT
- 2, 4, 5, 7, 8    Ground

5 Matching circuit

■  $L_{p6} = 5.6 \text{ nH}$

■  $L_{s3} = 12.5 \text{ nH}$

■  $L_{s1} = 8.5 \text{ nH}$

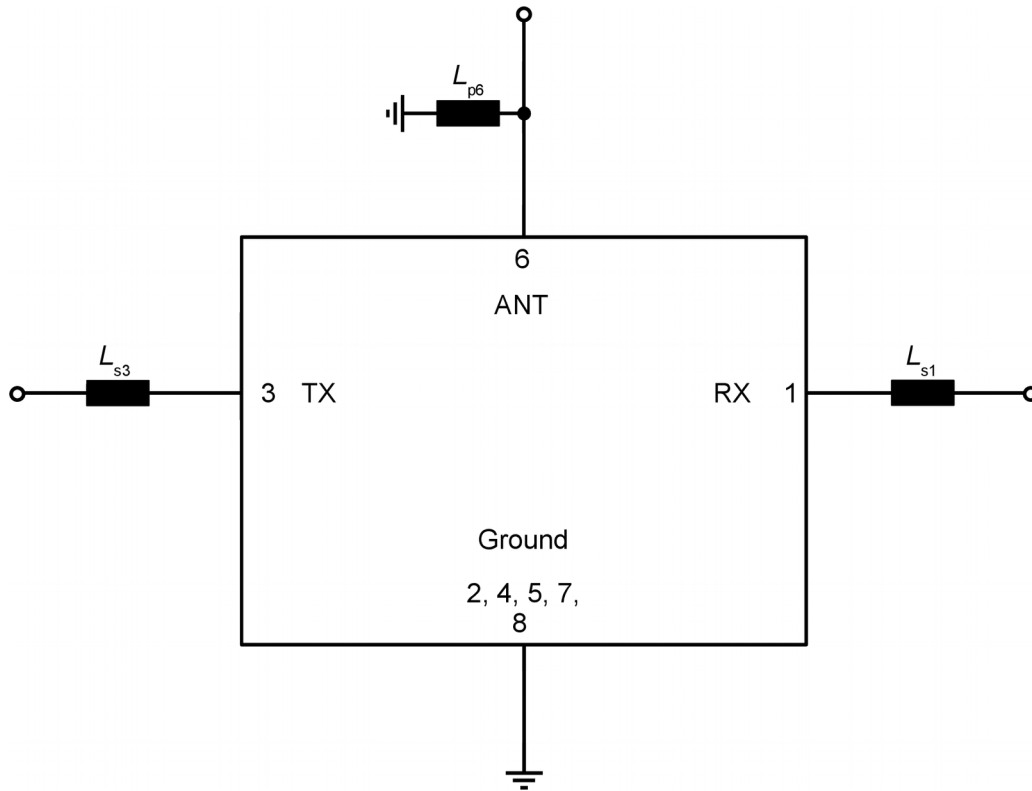


Figure 2: Schematic of matching circuit.

6 Characteristics

6.1 TX – ANT

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$ + 12.5 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ // 5.6 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$ + 8.5 nH <sup>1)</sup>

Characteristics TX – ANT				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>			$f_C$	—	831.5	—	MHz
<b>Maximum insertion attenuation</b>			$\alpha_{max}$				
	814.24... 848.76	MHz		—	1.2	2.0	dB
	824.24... 848.76	MHz		—	1.2	2.0	dB
<b>Amplitude ripple (p-p)</b>			$\Delta\alpha$				
	814.24... 848.76	MHz		—	0.5	2.0	dB
	824.24... 848.76	MHz		—	0.5	2.0	dB
<b>Maximum VSWR</b>			$VSWR_{max}$				
@ TX port	814.24... 848.76	MHz		—	1.4	2.0	
	824.24... 848.76	MHz		—	1.4	2.0	
@ ANT port	814.24... 848.76	MHz		—	1.5	2.0	
	824.24... 848.76	MHz		—	1.3	2.0	
<b>Minimum attenuation</b>			$\alpha_{min}$				
	10... 420	MHz		30	48	—	dB
	420... 494	MHz		40	44	—	dB
	663... 698	MHz		32	35	—	dB
	699... 716	MHz		32	35	—	dB
	728... 764	MHz		32	35	—	dB
	777... 798	MHz		38	43	—	dB
	859... 894	MHz		44	57	—	dB
	1166... 1187	MHz		36	39	—	dB
	1225... 1250	MHz		37	43	—	dB
	1475.9... 1510.9	MHz		38	48	—	dB
	1559... 1563	MHz		39	44	—	dB
	1565.42... 1573.37	MHz		39	44	—	dB
	1573.37... 1577.47	MHz		39	44	—	dB
	1577.47... 1585.42	MHz		39	44	—	dB
	1597.55... 1605.89	MHz		42	54	—	dB
	1628... 1698	MHz		35	53	—	dB
	1710... 1785	MHz		30	50	—	dB
	1850... 1915	MHz		30	48	—	dB
	1930... 1995	MHz		44	48	—	dB
	2110... 2200	MHz		44	47	—	dB
	2350... 2360	MHz		35	48	—	dB

Characteristics TX – ANT			min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
2400... 2690	MHz		43	47	—	dB
2402... 2494	MHz		43	48	—	dB
2620... 2690	MHz		43	47	—	dB
3256... 3396	MHz		35	46	—	dB
3300... 3800	MHz		35	46	—	dB
4070... 4245	MHz		35	46	—	dB
4400... 5000	MHz		35	45	—	dB
4884... 5950	MHz		30	36	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).



6.2 ANT – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω + 12.5 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 5.6 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω + 8.5 nH <sup>1)</sup>

Characteristics ANT – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>			$f_C$	—	876.5	—	MHz
<b>Maximum insertion attenuation</b>			$\alpha_{max}$				
	859.24... 893.76	MHz		—	1.6	2.5	dB
	869.24... 893.76	MHz		—	1.4	2.5	dB
<b>Amplitude ripple (p-p)</b>			$\Delta\alpha$				
	859.24... 893.76	MHz		—	0.7	2.0	dB
	869.24... 893.76	MHz		—	0.5	2.0	dB
<b>Maximum VSWR</b>			VSWR <sub>max</sub>				
@ ANT port	859.24... 893.76	MHz		—	1.6	2.0	
	869.24... 893.76	MHz		—	1.6	2.0	
@ RX port	859.24... 893.76	MHz		—	1.7	2.0	
	869.24... 893.76	MHz		—	1.7	2.0	
<b>Minimum attenuation</b>			$\alpha_{min}$				
	10... 447	MHz		40	64	—	dB
	44.5... 45.5	MHz		50	98	—	dB
	663... 698	MHz		40	55	—	dB
	699... 716	MHz		40	55	—	dB
	777... 798	MHz		40	59	—	dB
	814... 849	MHz		45	55	—	dB
	1427... 1447	MHz		40	61	—	dB
	1710... 1785	MHz		50	56	—	dB
	1850... 1915	MHz		40	54	—	dB
	1920... 1980	MHz		40	54	—	dB
	2305... 2315	MHz		48	56	—	dB
	2400... 2500	MHz		48	56	—	dB
	2496... 2690	MHz		48	56	—	dB
	2620... 2690	MHz		48	56	—	dB
	3300... 3800	MHz		48	55	—	dB
	4400... 5000	MHz		48	58	—	dB
	4900... 5950	MHz		48	58	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

6.3 TX – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω + 12.5 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 5.6 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω + 8.5 nH <sup>1)</sup>

Characteristics TX – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Minimum isolation</b>							
	$\alpha_{min}$						
		814.24... 848.76	MHz	55	57	—	dB
		824.24... 848.76	MHz	55	57	—	dB
		859.24... 893.76	MHz	55 <sup>2)</sup>	60	—	dB
		859.24... 893.76	MHz	53	60	—	dB
		869.24... 893.76	MHz	55	61	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).  
<sup>2)</sup> Valid for typical temperature  $T = +25$  °C.

## 7 Maximum ratings

Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +90\text{ °C}$	
DC voltage	$ V_{DC} ^{3)} = 0\text{ V (max.)}^{2)}$	
ESD voltage		
	$V_{ESD}^{4)} = 100\text{ V (max.)}$	Machine model.
	$V_{ESD}^{5)} = 600\text{ V (max.)}$	Charged device model.
	$V_{ESD}^{6)} = 300\text{ V (max.)}$	Human body model.
Input power	$P_{IN}$	
@ TX port: 814 ... 849 MHz	31 dBm	<ul style="list-style-type: none"> <li>■ Continuous wave for 5000 h @ 50 °C.</li> <li>■ 5MHz LTE uplink signal 1RB for 5000 h @ 50 °C.</li> </ul>
@ TX port: 814 ... 849 MHz	30 dBm	5MHz 5G NR (CP-OFDM) 1RB for 5000 h @ 50 °C.

<sup>1)</sup> Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

<sup>2)</sup> DC resistance at RX output might be less than 100MΩ at elevated temperatures. Hence, we recommend usage of blocking capacitors.

<sup>3)</sup> In case of applied DC voltage blocking capacitors are mandatory.

<sup>4)</sup> According to JESD22-A115B (MM – Machine Model), 10 negative & 10 positive pulses.

<sup>5)</sup> According to JESD22-C101 (CDM – Field Induced Charged Device Model), 3 negative & 3 positive pulses.

<sup>6)</sup> According to JESD22-A114 (HBM – Human Body Model), 1 negative & 1 positive pulse.

8 Transmission coefficients

8.1 TX – ANT

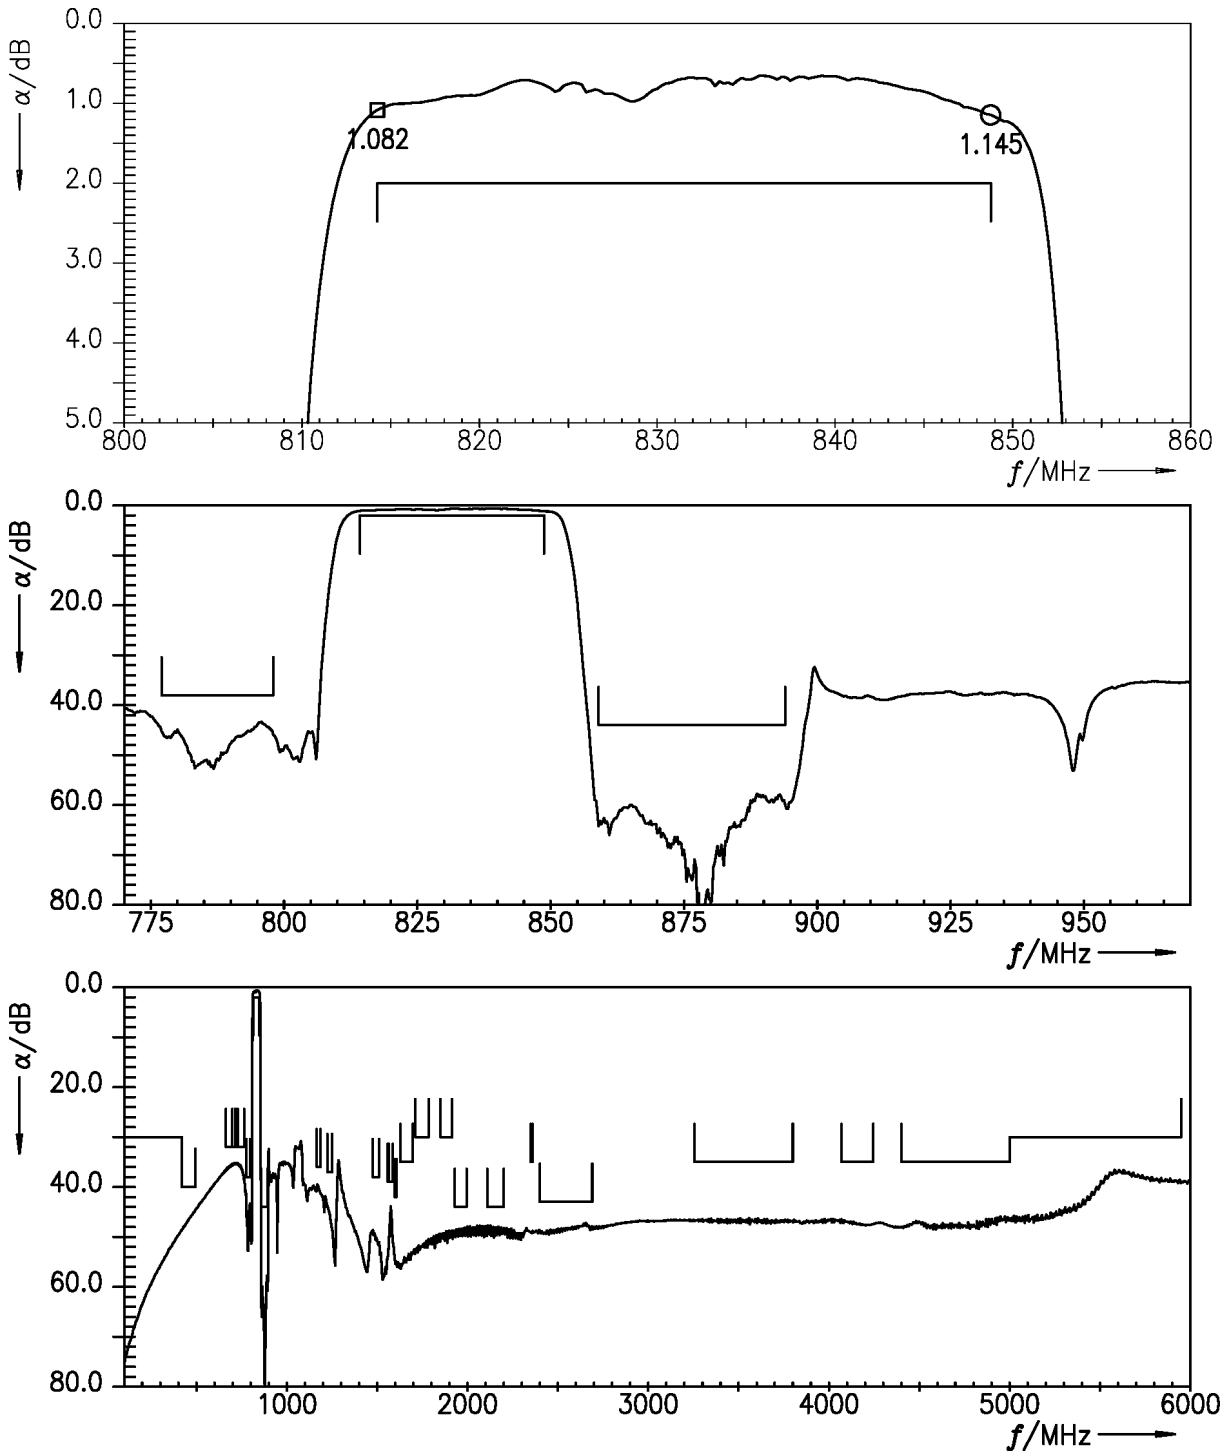


Figure 3: Attenuation TX – ANT.

8.2 ANT – RX

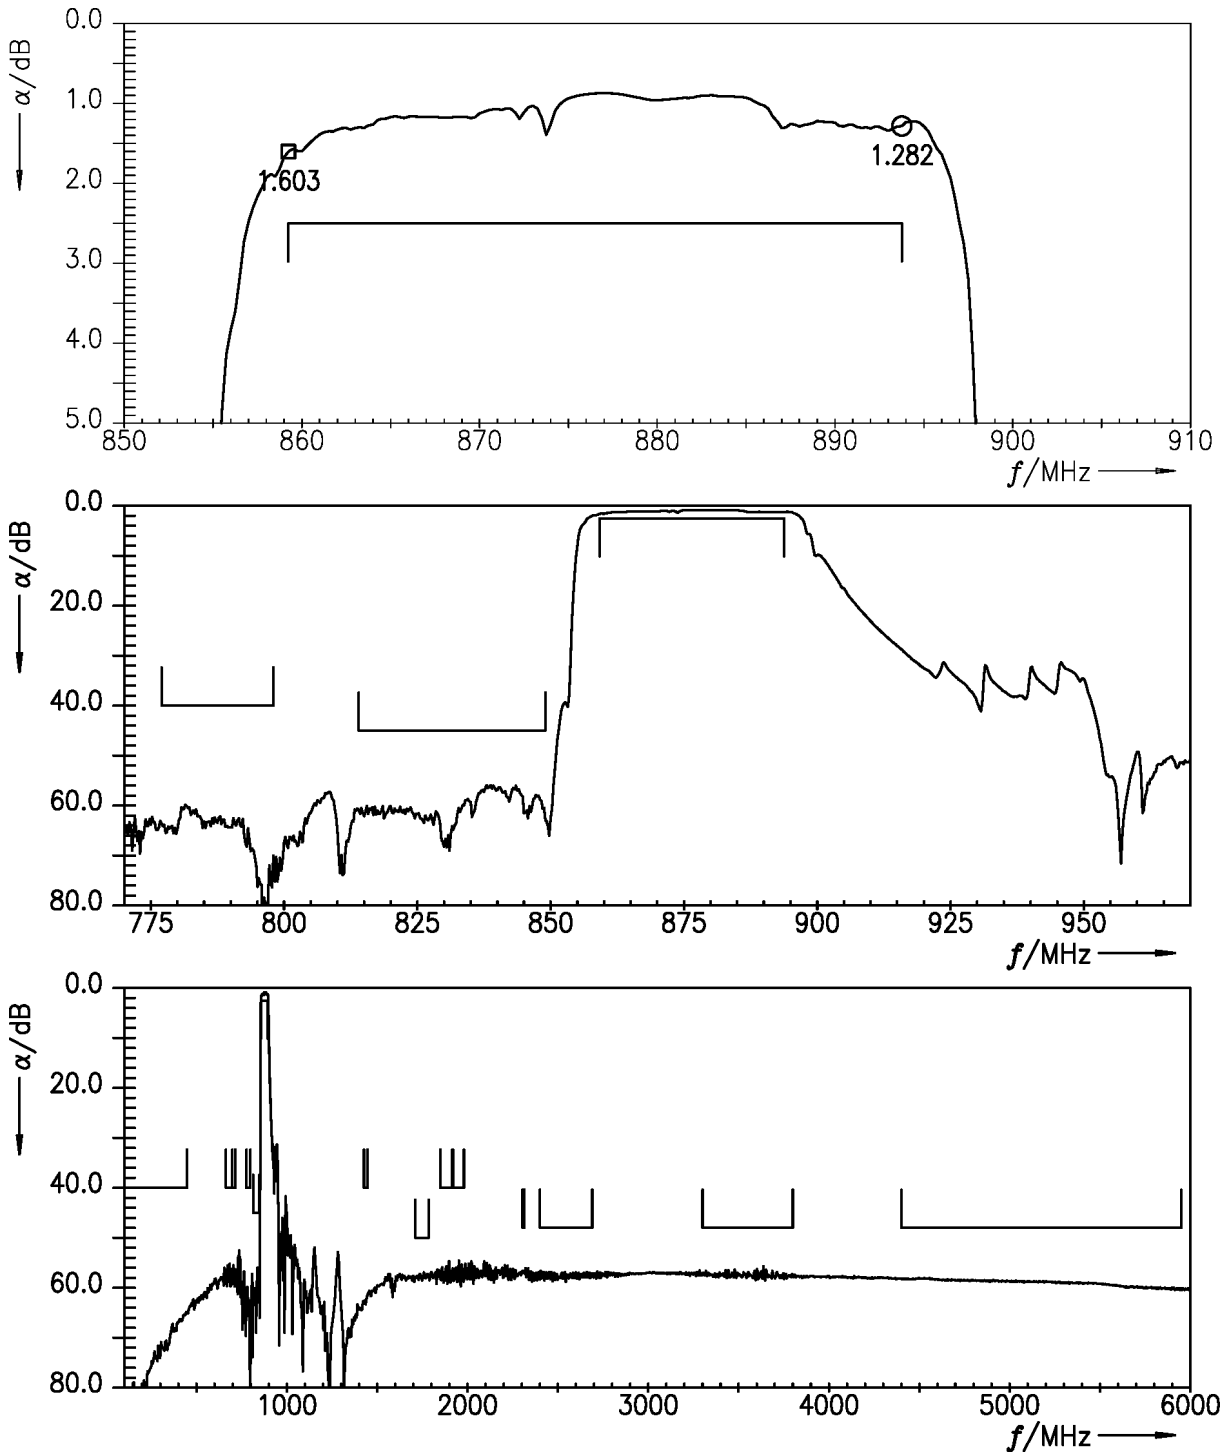


Figure 4: Attenuation ANT – RX.

8.3 TX – RX

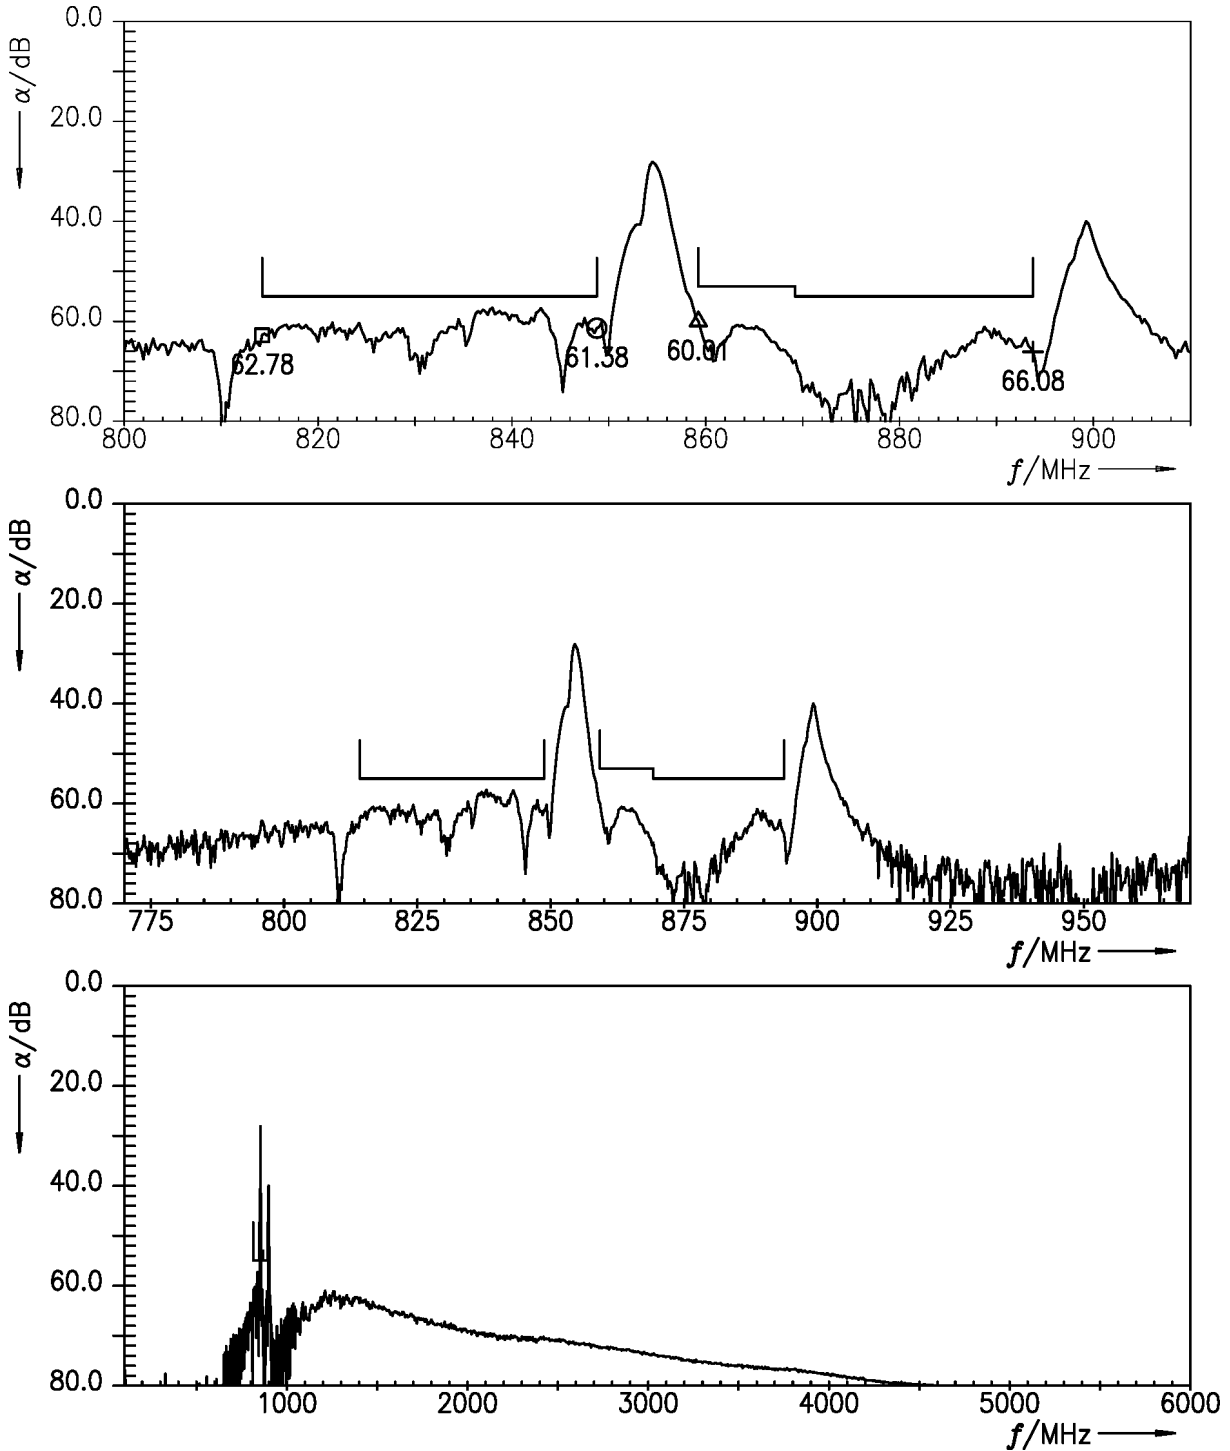


Figure 5: Isolation TX – RX.

9 Reflection coefficients

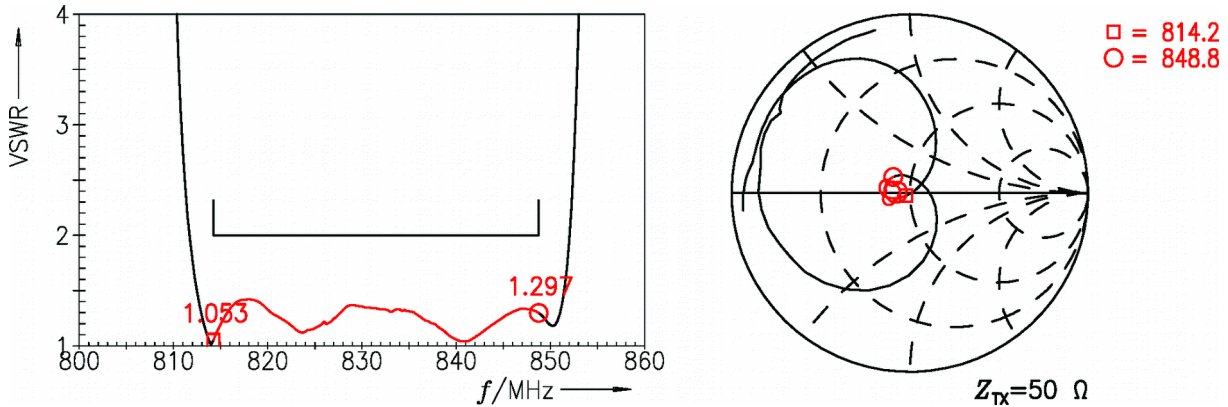


Figure 6: Reflection coefficient at TX port.

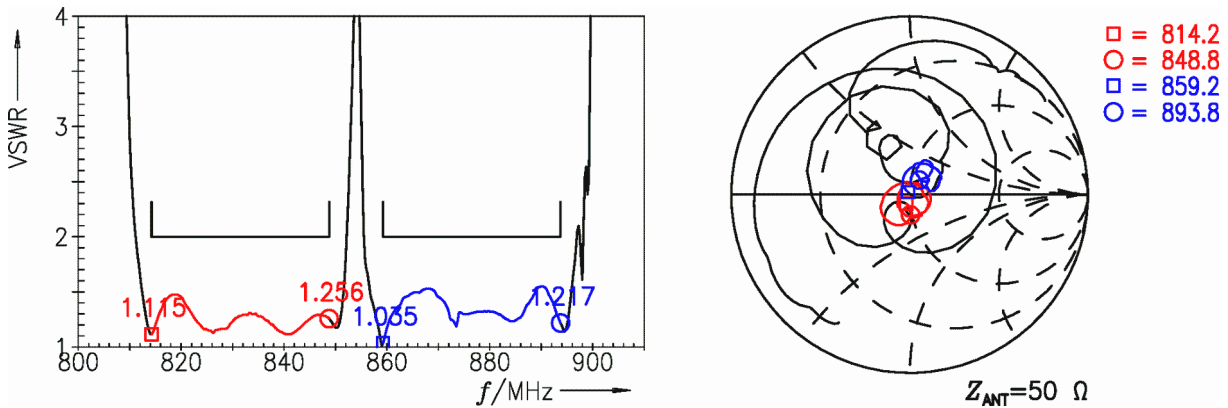


Figure 7: Reflection coefficient at ANT port (TX and RX frequencies).


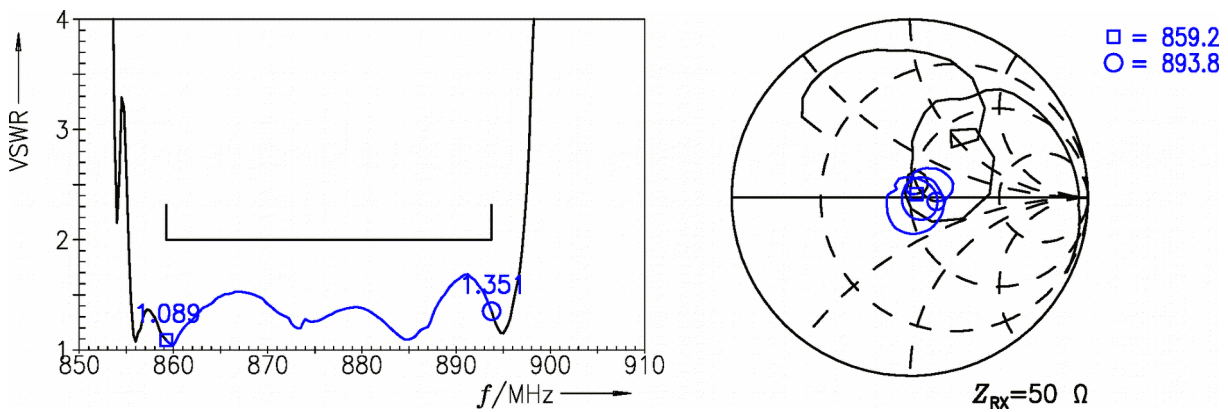


Figure 8: Reflection coefficient at RX port.

10 Packing material

10.1 Tape

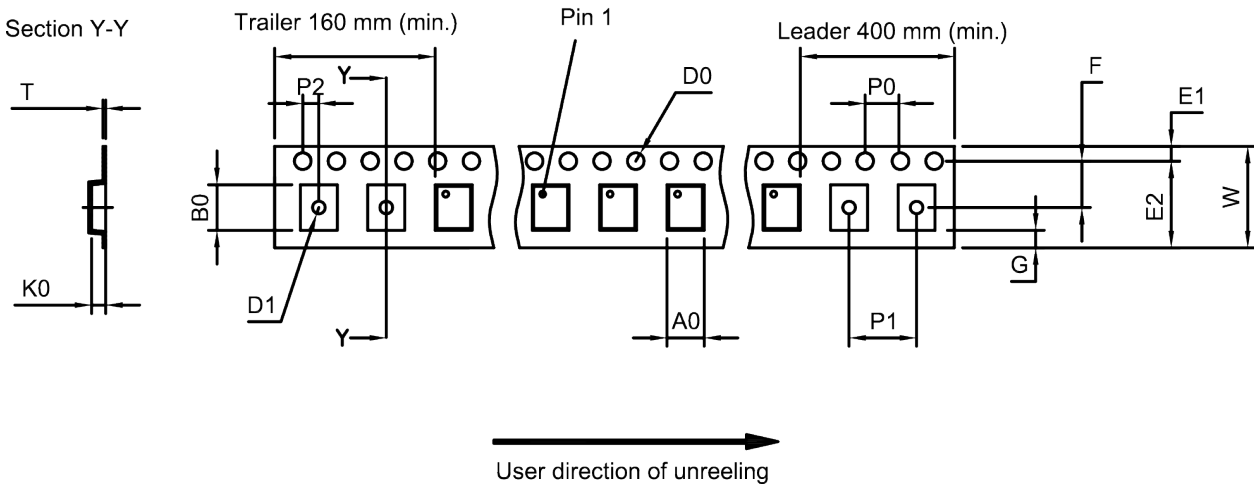

**Figure 9:** Drawing of tape (first-angle projection) for illustration only and not to scale. The valid tape dimensions are listed in Table 1.

A <sub>0</sub>	1.4±0.05 mm	E <sub>2</sub>	6.25 mm (min.)	P <sub>1</sub>	4.0±0.1 mm
B <sub>0</sub>	1.8±0.05 mm	F	3.5±0.05 mm	P <sub>2</sub>	2.0±0.05 mm
D <sub>0</sub>	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.03 mm
D <sub>1</sub>	0.6+0.1/-0 mm	K <sub>0</sub>	0.7±0.05 mm	W	8.0+0.3/-0.1 mm
E <sub>1</sub>	1.75±0.1 mm	P <sub>0</sub>	4.0±0.1 mm		

**Table 1:** Tape dimensions.



10.2 Reel with diameter of 180 mm

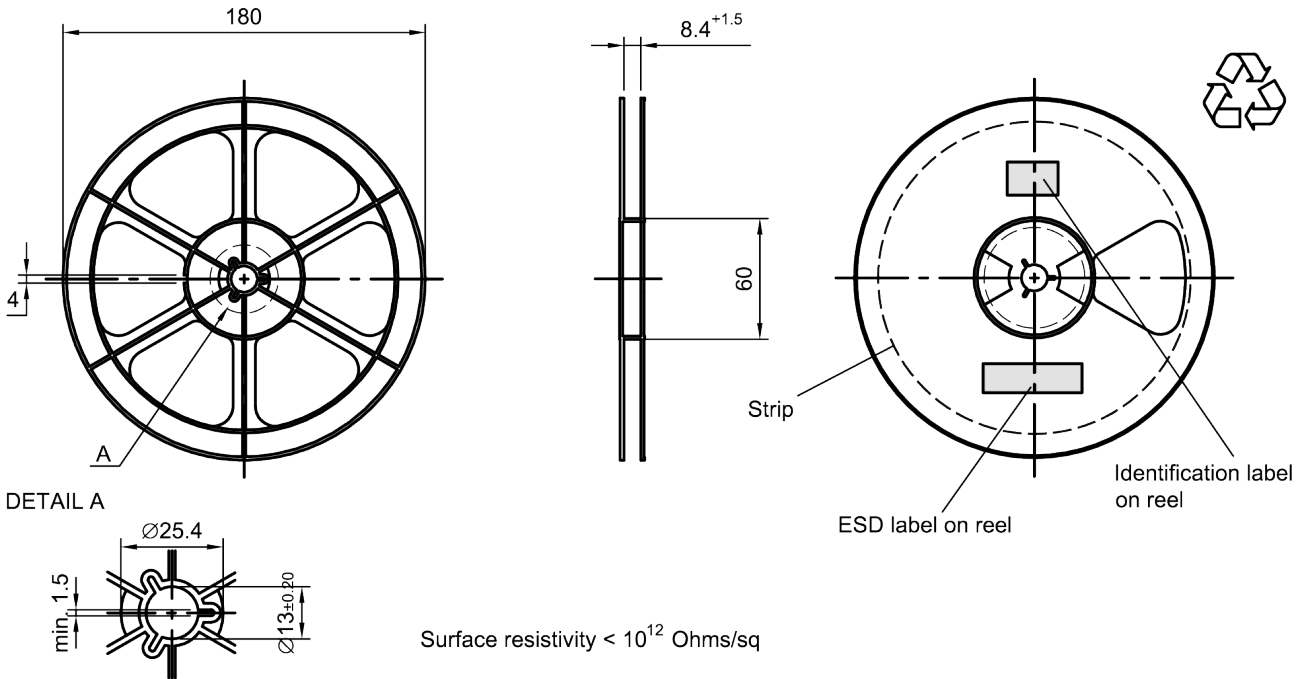


Figure 10: Drawing of reel (first-angle projection) with diameter of 180 mm.

Dimensions [mm]

X = 220+5

Y = 235+5

Sealing area 10±3

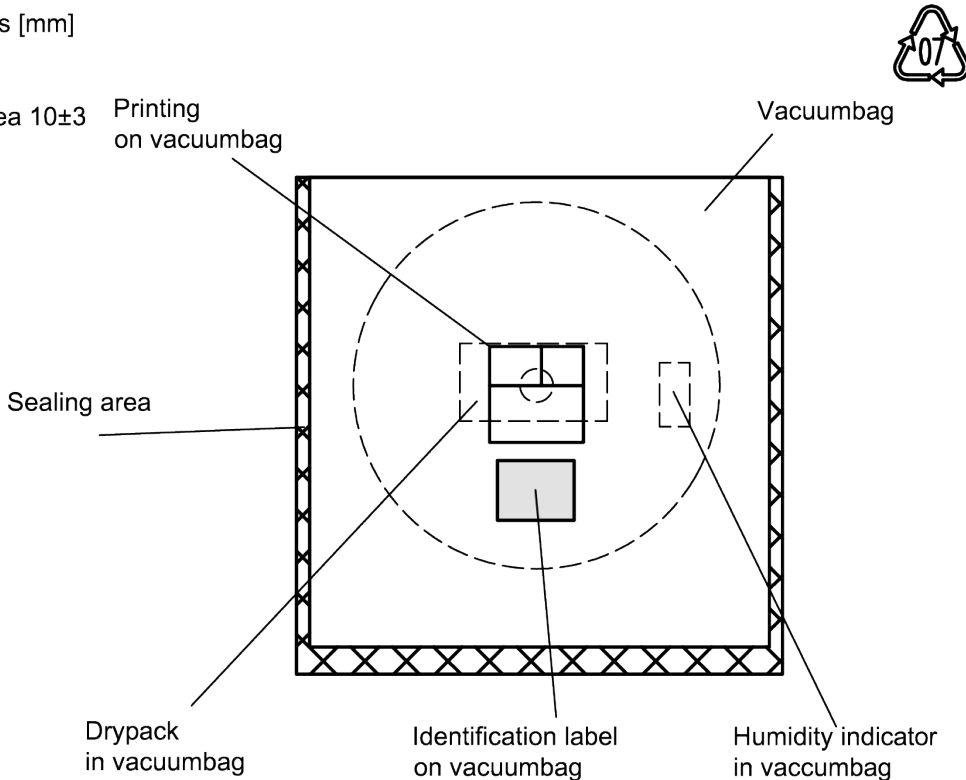


Figure 11: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

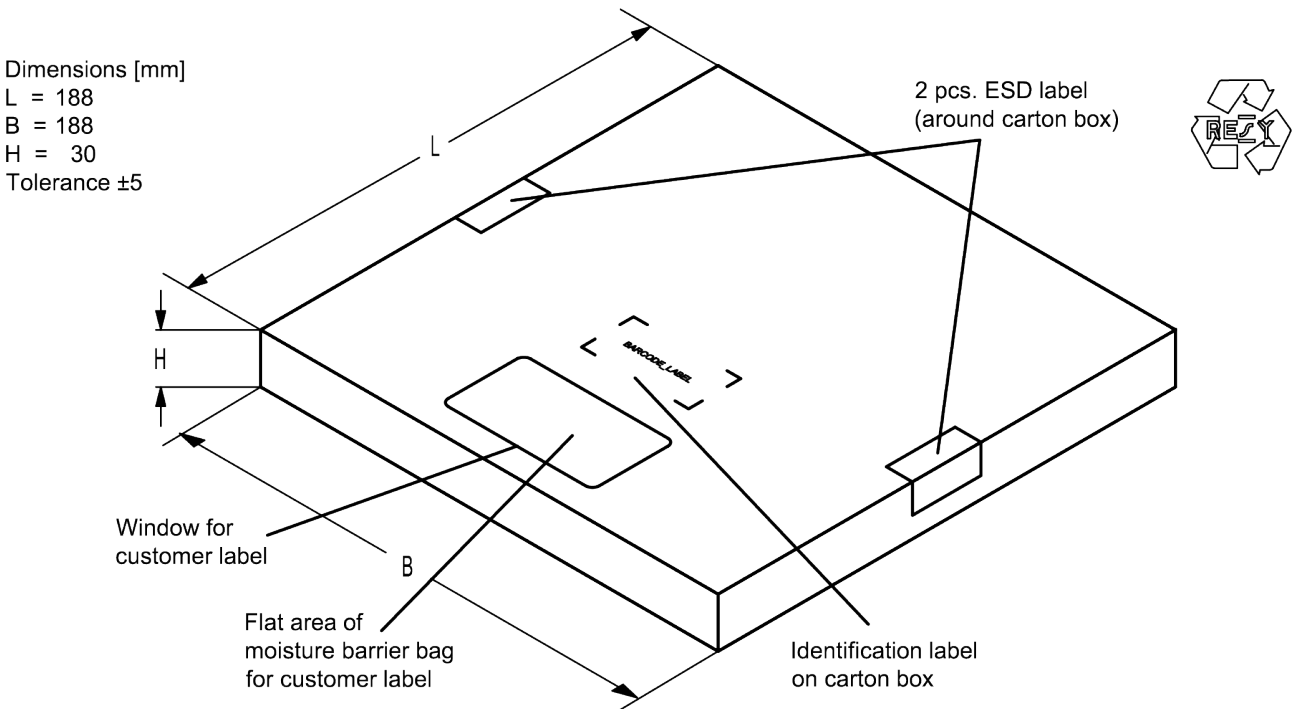


Figure 12: Drawing of folding box for reel with diameter of 180 mm.

### 10.3 Reel with diameter of 330 mm

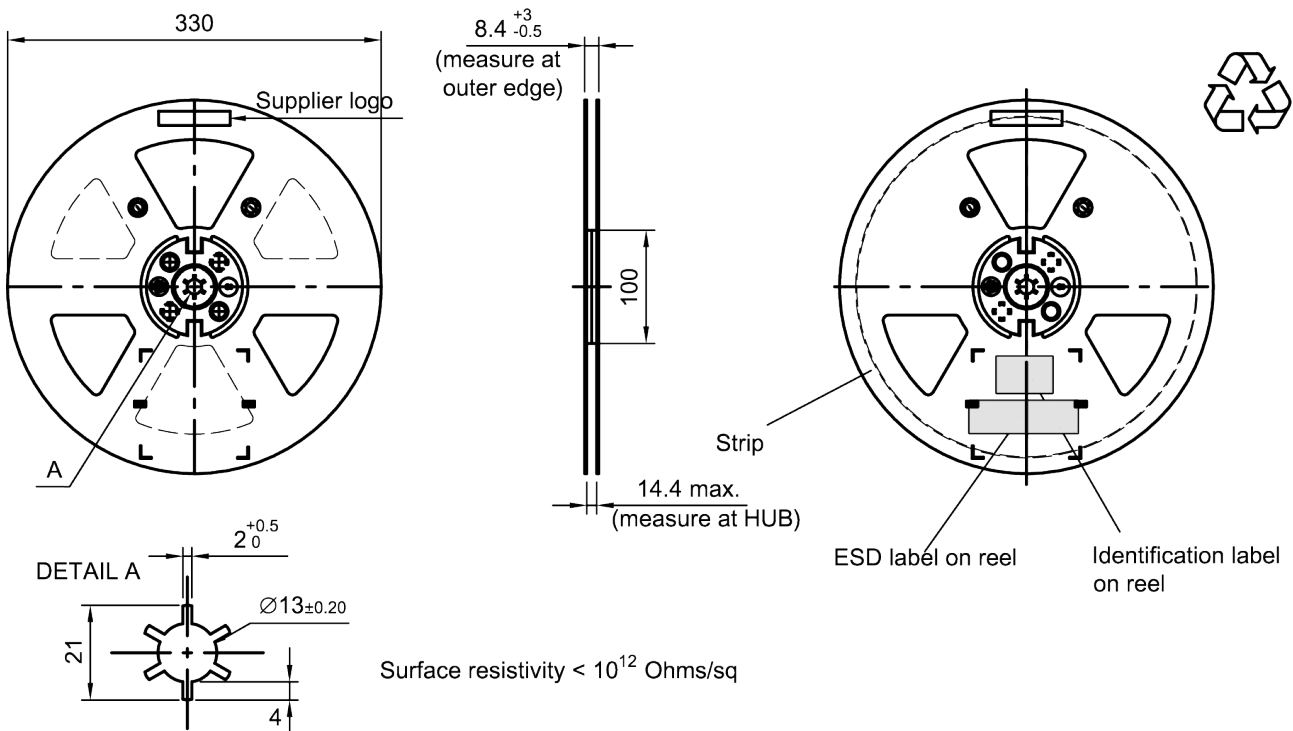



Figure 13: Drawing of reel (first-angle projection) with diameter of 330 mm.

Dimensions [mm]

X = 400+5

Y = 418+5

Sealing area 10±3

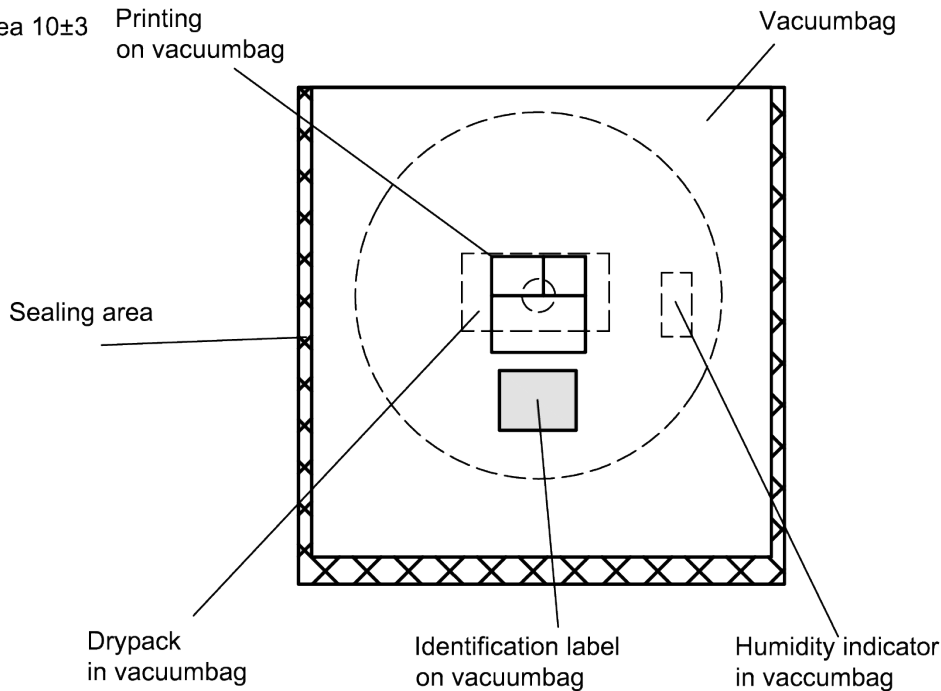

**Figure 14:** Drawing of moisture barrier bag (MBB) for reel with diameter of 330 mm.

Dimensions [mm]

L = 335


B = 338

H = 36 ( for 8 mm tape width)

40 ( for 12 mm tape width)

Tolerance ±5

2 pcs. ESD label  
(around carton box)

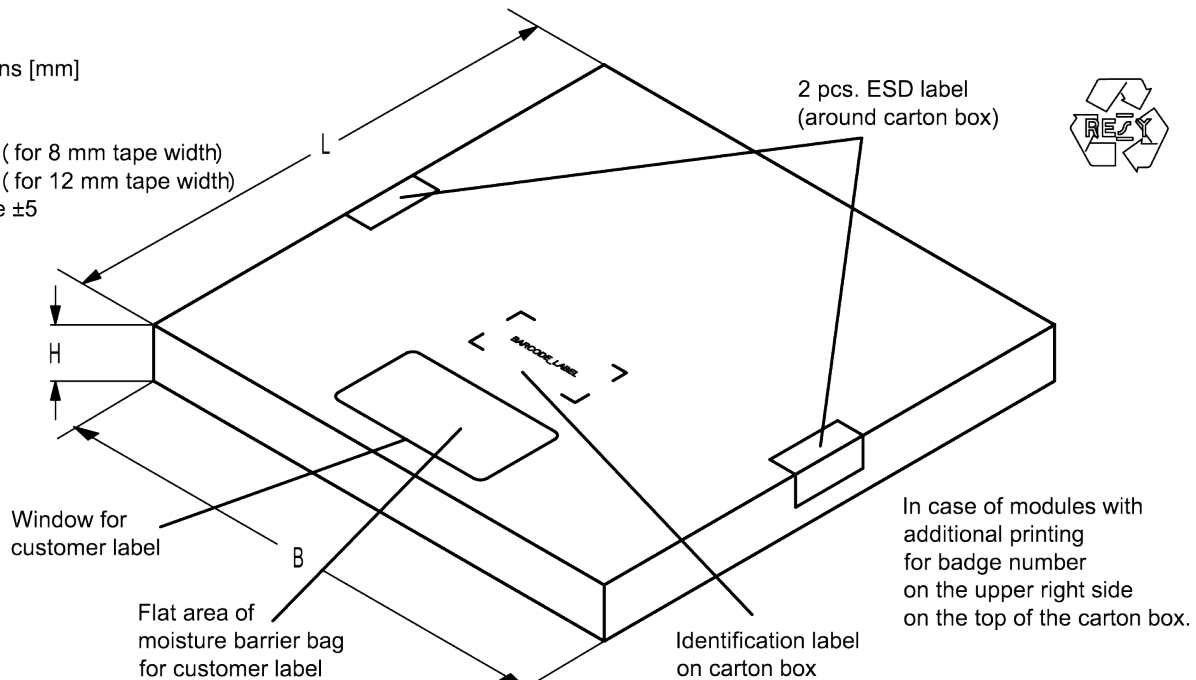

**Figure 15:** Drawing of folding box for reel with diameter of 330 mm.

**11 Marking**

Products are marked with product type number and lot number encoded according to Table 2:

■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx,  
is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding type number marking on device in decimal code.  
**16J** => **1234**  
 $1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0$  = **1234**  
 The BASE32 code for product type B1268 is 17M.

■ Lot number:

The last 5 digits of the lot number, e.g., **12345**,  
are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device in decimal code.  
**5UY** => **12345**  
 $5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0$  = **12345**

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		


**Table 2:** Lists for encoding and decoding of marking.

## 12 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3<sup>rd</sup> edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
$T > 220\text{ °C}$	30 s to 70 s
$T > 230\text{ °C}$	min. 10 s
$T > 245\text{ °C}$	max. 20 s
$T \geq 255\text{ °C}$	–
peak temperature $T_{\text{peak}}$	250 °C +0/-5 °C
wetting temperature $T_{\text{min}}$	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature $T$	measured at solder pads

**Table 3:** Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

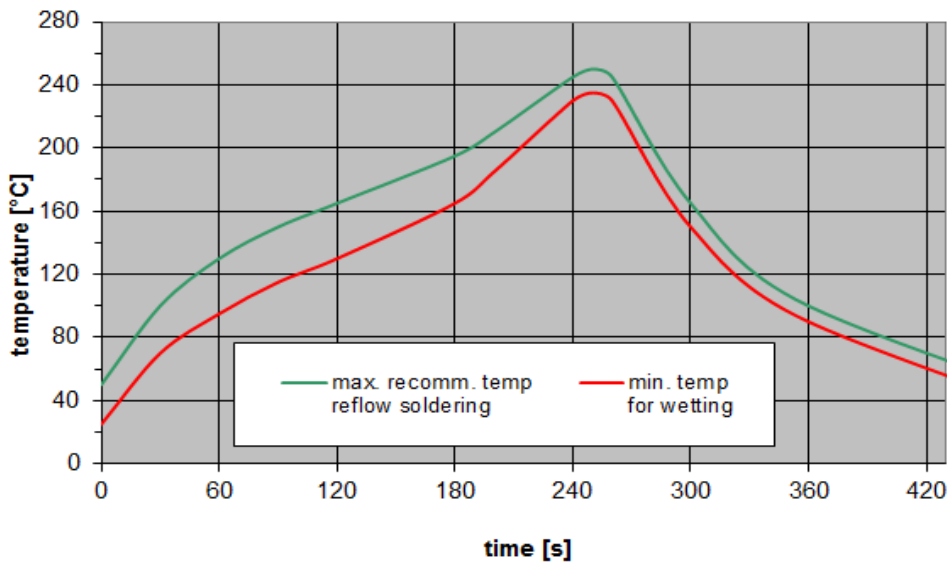

**Figure 16:** Recommended reflow profile for convection and infrared soldering – lead-free solder.

**13 Annotations**

**13.1 RoHS compatibility**

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

**13.2 Scattering parameters (S-parameters)**

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

**13.3 Ordering codes / product IDs and packing units**

Ordering code / product ID	RF360 label	Packing unit
B39871B1268L210	B39871-B1268-L210-S05	5000 pcs
	B39871-B1268-L210-W05	5000 pcs

**Table 4:** Ordering codes / product IDs and packing units. Shipment will come from either Singapore or Wuxi location.

## 14 Cautions and warnings

### 14.1 Display of ordering codes for RF360 products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under <https://rfe.qualcomm.com/>.

### 14.2 Material information

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

### 14.3 Moldability

Before using in overmolding environment, please contact your local RF360 sales office.

### 14.4 Package information

#### Landing area

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

#### Dimensions

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

#### Projection method

Unless otherwise specified first-angle projection is applied.

## 15 Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (<https://rfe.qualcomm.com>). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.



单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)