



RF360  
Europe GmbH

## Data sheet

SAW duplexer  
LTE / 5G band 20

Part number:	B1256
Ordering code:	B39851B1256L210
Date:	November 24, 2020
Version:	2.3

DCN: 80-PA243-347 Rev. D

RF360 products mentioned within this document are products of RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the "RF360 Subsidiaries").

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2020 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

**Table of contents**

1 <a href="#">Application</a> .....	4
2 <a href="#">Features</a> .....	4
3 <a href="#">Package</a> .....	5
4 <a href="#">Pin configuration</a> .....	5
5 <a href="#">Matching circuit</a> .....	6
6 <a href="#">Characteristics</a> .....	7
7 <a href="#">Maximum ratings</a> .....	11
8 <a href="#">Transmission coefficients</a> .....	12
9 <a href="#">Transmission coefficients (LTE)</a> .....	15
10 <a href="#">Reflection coefficients</a> .....	17
11 <a href="#">Packing material</a> .....	18
12 <a href="#">Marking</a> .....	22
13 <a href="#">Soldering profile</a> .....	23
14 <a href="#">Annotations</a> .....	24
15 <a href="#">Cautions and warnings</a> .....	25
16 <a href="#">Important notes</a> .....	26

## 1 Application


- Duplexer for 4G and 5G band 20
- Band 20 uplink: 847 MHz (pass band 30 MHz)
- Band 20 downlink: 806 MHz (pass band 30 MHz)
- Qualcomm® micro-Acoustic Power Management (MAPM)
- High attenuation
- Low amplitude ripple
- Single-ended duplexer
- Very small size and low height

## 2 Features

- Package size  $1.6_{\pm 0.05}$  mm  $\times$   $1.2_{\pm 0.05}$  mm
- Package height 0.6 mm (max.)
- Approximate weight 3 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 3 (MSL3)


### 3 Package

BOTTOM VIEW

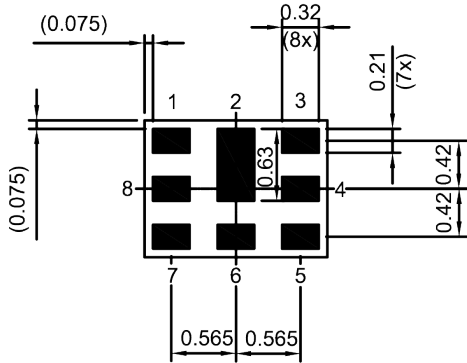


Pad and Pitch Tolerance  $\pm 0.05$

SIDE VIEW




TOP VIEW

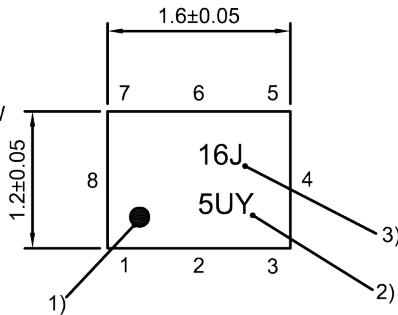

- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

Land pattern  
THRU VIEW

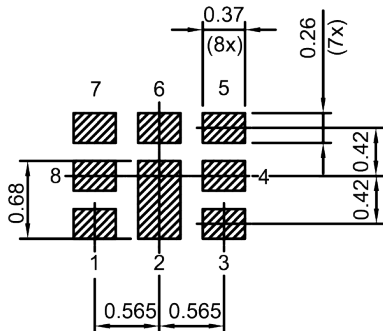

Landing pad tolerance  $-0.02$

### 4 Pin configuration

- 1      RX
- 3      TX
- 6      ANT
- 2, 4, 5, 7, 8      Ground

**Figure 1:** Drawing of package with package height A = 0.6 mm (max.). See Sec. Package information (p. 25).

5 Matching circuit

■  $L_{p6} = 12.5 \text{ nH}$

■  $L_{s3} = 6.2 \text{ nH}$

■  $L_{s1} = 4.5 \text{ nH}$

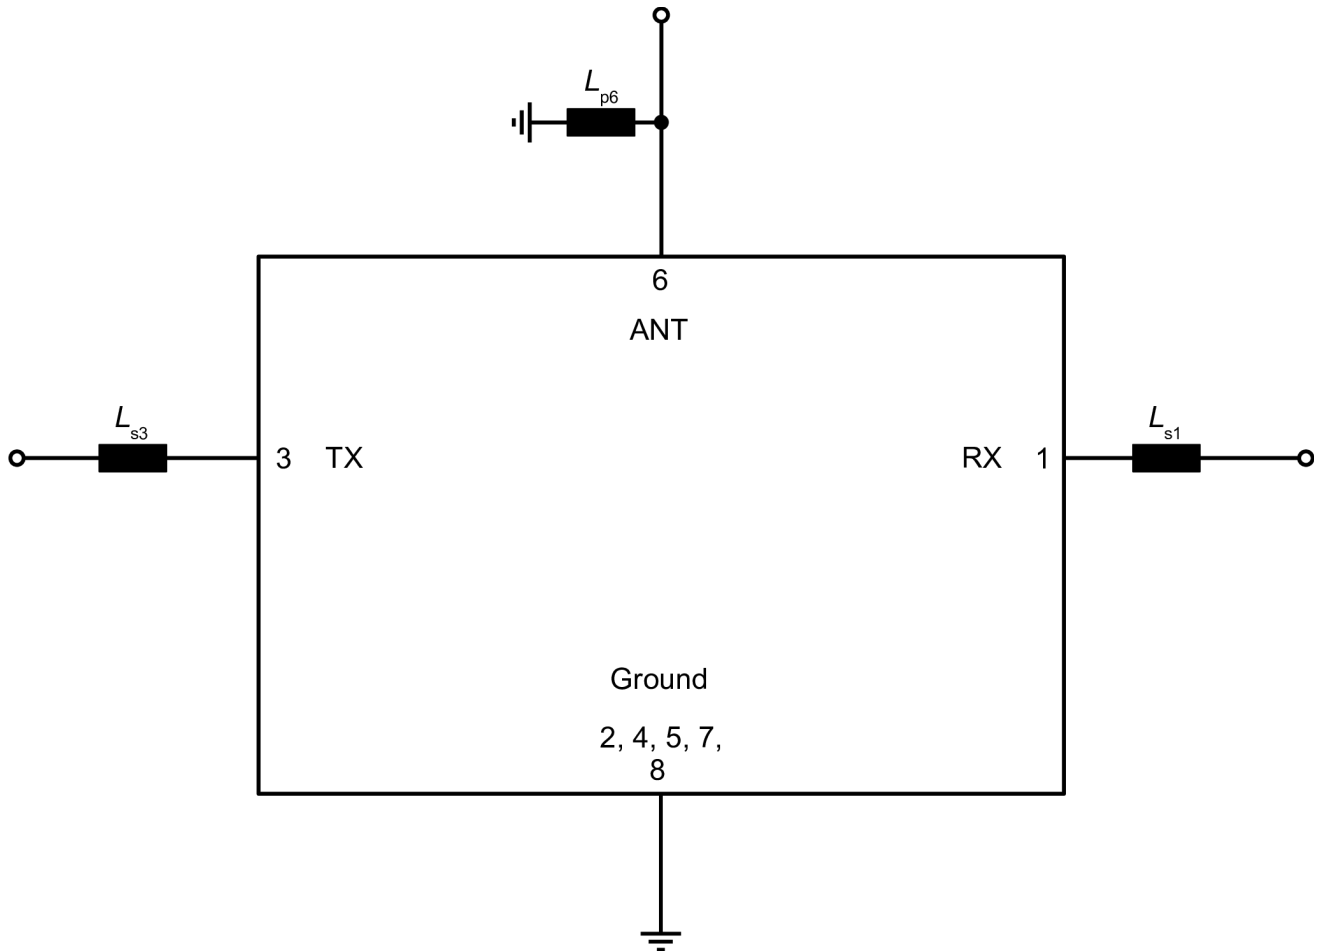


Figure 2: Schematic of matching circuit.

External shunt inductor for ESD protection is recommended at any ports towards antenna.

6 Characteristics

6.1 TX – ANT

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω + 6.2 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 12.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω + 4.5 nH <sup>1)</sup>

Characteristics TX – ANT			min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>		$f_C$	—	847	—	MHz
<b>Maximum insertion attenuation</b>	832... 862	MHz	—	1.3	2.2	dB
<b>Amplitude ripple (p-p)</b>	832... 862	MHz	—	0.7	1.6	dB
<b>Maximum VSWR</b>		VSWR <sub>max</sub>				
@ TX port	832... 862	MHz	—	1.6	2.0	
@ ANT port	832... 862	MHz	—	1.6	2.0	
<b>Maximum error vector magnitude</b>		EVM <sub>max</sub> <sup>2)</sup>				
	834.4... 859.6	MHz	—	2.3	3.0 <sup>3)</sup>	%
	834.4... 859.6	MHz	—	3.0	4.0	%
<b>Minimum attenuation</b>		$\alpha_{min}$				
	10... 758	MHz	35	39	—	dB
	758... 773	MHz	38	44	—	dB
	791... 821	MHz	50	57	—	dB
	880... 915	MHz	38	43	—	dB
	925... 960	MHz	35	41	—	dB
	1166... 1187	MHz	40	44	—	dB
	1226... 1250	MHz	40	45	—	dB
	1452... 1496	MHz	48	53	—	dB
	1559... 1563	MHz	48	54	—	dB
	1565.42... 1573.37	MHz	48	55	—	dB
	1573.37... 1577.47	MHz	48	55	—	dB
	1577.47... 1585.42	MHz	48	55	—	dB
	1597.55... 1605.89	MHz	48	55	—	dB
	1664... 1724	MHz	50	58	—	dB
	1805... 1880	MHz	50	58	—	dB
	2110... 2170	MHz	45	53	—	dB
	2400... 2500	MHz	50	57	—	dB
	2496... 2586	MHz	50	55	—	dB
	2570... 2620	MHz	50	55	—	dB
	2620... 2690	MHz	48	54	—	dB
	3300... 3800	MHz	45	52	—	dB
	3328... 3448	MHz	45	52	—	dB

Characteristics TX – ANT	min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
5150... 5950 MHz	30	38	—	dB

- 1) See Sec. Matching circuit (p. 6).
- 2) Error Vector Magnitude (EVM) based on definition in 3GPP TS 25.141.
- 3) Valid for typical temperature  $T = +25$  °C.



6.2 ANT – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$ + 6.2 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ // 12.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$ + 4.5 nH <sup>1)</sup>

Characteristics ANT – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>			$f_C$	—	806	—	MHz
<b>Maximum insertion attenuation</b>	791... 821	MHz	$\alpha_{max}$	—	1.7	2.5	dB
<b>Amplitude ripple (p-p)</b>	791... 821	MHz	$\Delta\alpha$	—	0.8	1.6	dB
<b>Maximum VSWR</b>			VSWR <sub>max</sub>				
@ ANT port	791... 821	MHz		—	1.7	2.0	
@ RX port	791... 821	MHz		—	1.7	2.0	
<b>Minimum attenuation</b>							
	10... 703	MHz	$\alpha_{min}$	50	54	—	dB
	703... 718	MHz	$\alpha_{min}$	50	56	—	dB
	832... 862	MHz	$\alpha_{INT,min}^{2)}$	50 <sup>3)</sup>	57	—	dB
	880... 915	MHz	$\alpha_{min}$	50	55	—	dB
	1710... 1785	MHz	$\alpha_{min}$	45	50	—	dB
	1920... 1980	MHz	$\alpha_{min}$	45	50	—	dB
	2400... 2500	MHz	$\alpha_{min}$	55	60	—	dB
	2500... 2570	MHz	$\alpha_{min}$	55	60	—	dB
	2570... 2620	MHz	$\alpha_{min}$	50	60	—	dB
	3300... 3800	MHz	$\alpha_{min}$	40	48	—	dB
	5150... 5950	MHz	$\alpha_{min}$	20	26	—	dB

1) See Sec. Matching circuit (p. 6).

2) Integrated attenuation  $\alpha_{INT}$ : Averaged power  $|S_{ij}|^2$  over the center 4.5 MHz of LTE 5 MHz (25 RB) channels.

3) Valid for temperature  $T = +25\text{ °C} \dots +85\text{ °C}$ .

**6.3 TX – RX**

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω + 6.2 nH <sup>1)</sup>
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 12.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω + 4.5 nH <sup>1)</sup>

Characteristics TX – RX				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Minimum isolation</b>							
	791... 821	MHz	$\alpha_{min}$	53	58	—	dB
	832... 862	MHz	$\alpha_{INT,min}^{2)}$	53	59	—	dB

<sup>1)</sup> See Sec. Matching circuit (p. 6).

<sup>2)</sup> Integrated attenuation  $\alpha_{INT}$ : Averaged power  $|S_{ij}|^2$  over the center 4.5 MHz of LTE 5 MHz (25 RB) channels.

## 7 Maximum ratings

Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +85\text{ °C}$	
DC voltage	$ V_{DC} ^{2)} = 0\text{ V (max.)}$	
ESD voltage		
	$V_{ESD}^{3)} = 300\text{ V (max.)}$	Human body model.
	$V_{ESD}^{4)} = 600\text{ V (max.)}$	Charged device model.
	$V_{ESD}^{5)} = 50\text{ V (max.)}$	Machine model.
Input power	$P_{IN}$	
@ TX port: 832 ... 862 MHz	31 dBm	Continuous wave for 5000 h @ 50 °C.
@ TX port: 832 ... 862 MHz	31 dBm	5MHz LTE uplink signal 1RB for 5000h @ 50°C
@ TX port: 832 ... 862 MHz	29 dBm	5MHz 5G NR (CP-OFDM) 1RB for 5000h @ 50°C
@ TX port: other frequency ranges	10 dBm	Continuous wave for 5000 h @ 50 °C.

1) Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

2) In case of applied DC voltage blocking capacitors are mandatory.

3) According to JESD22-A114F (HBM – Human Body Model), 1 negative & 1 positive pulse.

4) According to JESD22-C101C (CDM – Field Induced Charged Device Model), 3 negative & 3 positive pulses.

5) According to JESD22-A115B (MM – Machine Model), 10 negative & 10 positive pulses.

8 Transmission coefficients

8.1 TX – ANT

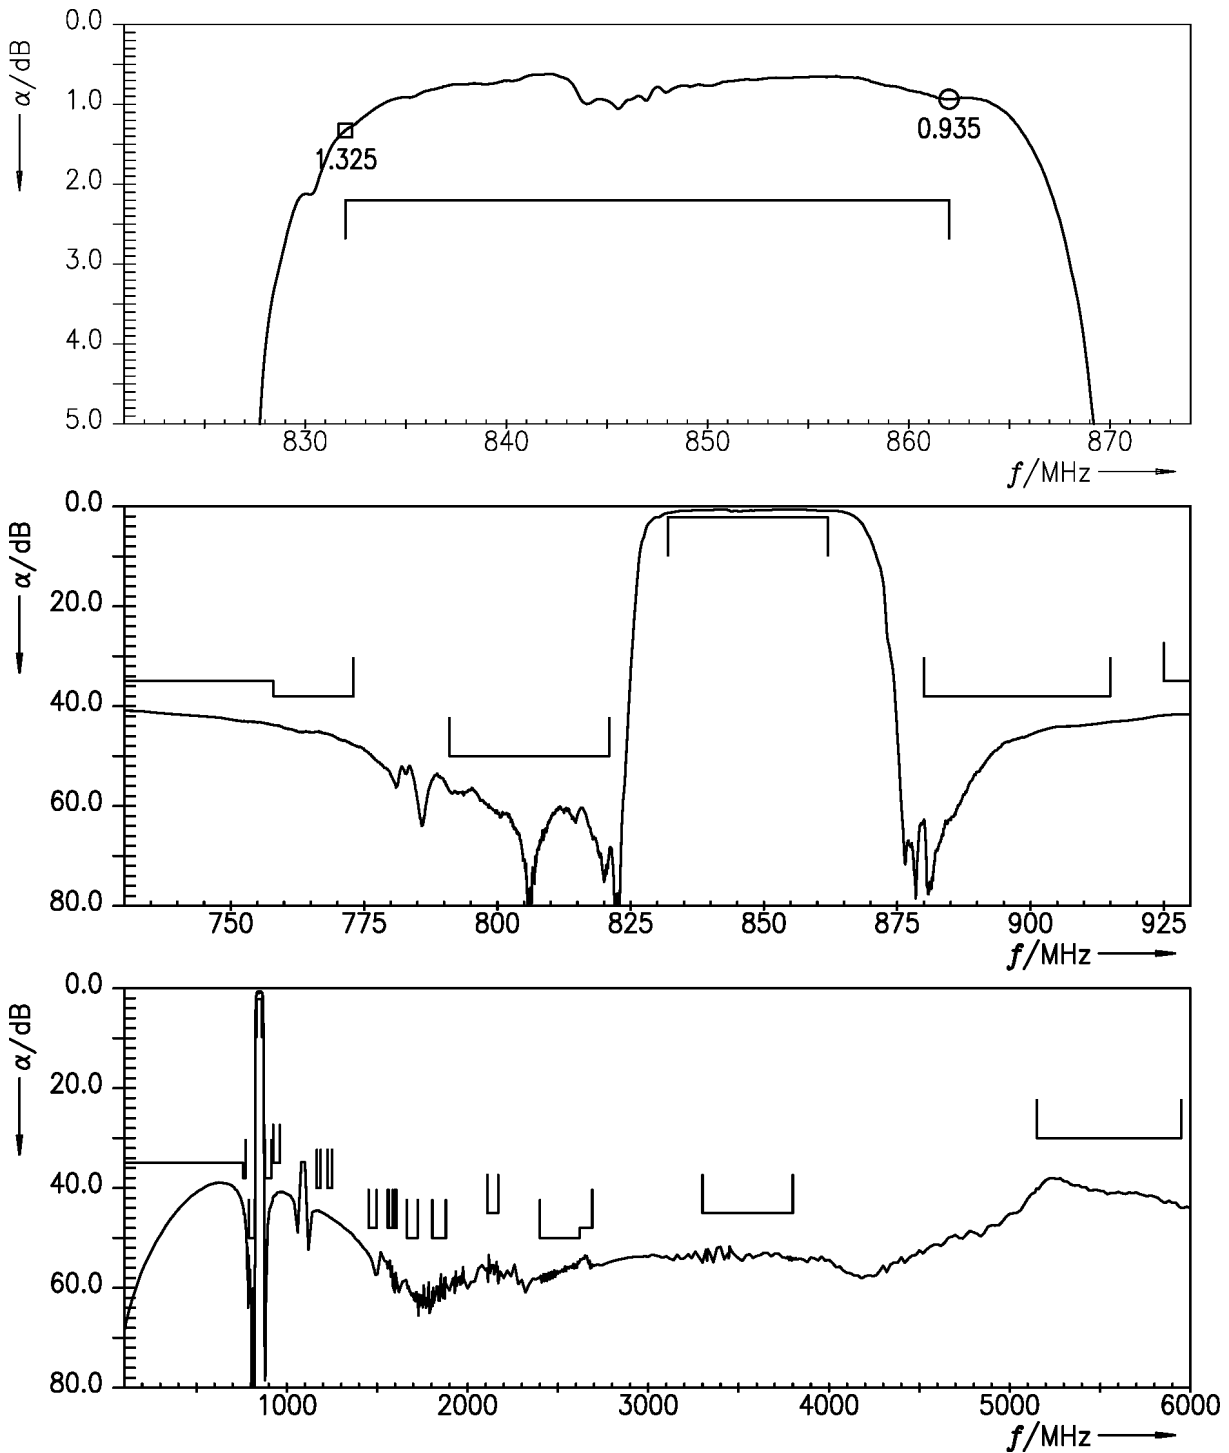


Figure 3: Attenuation TX – ANT.

8.2 ANT – RX

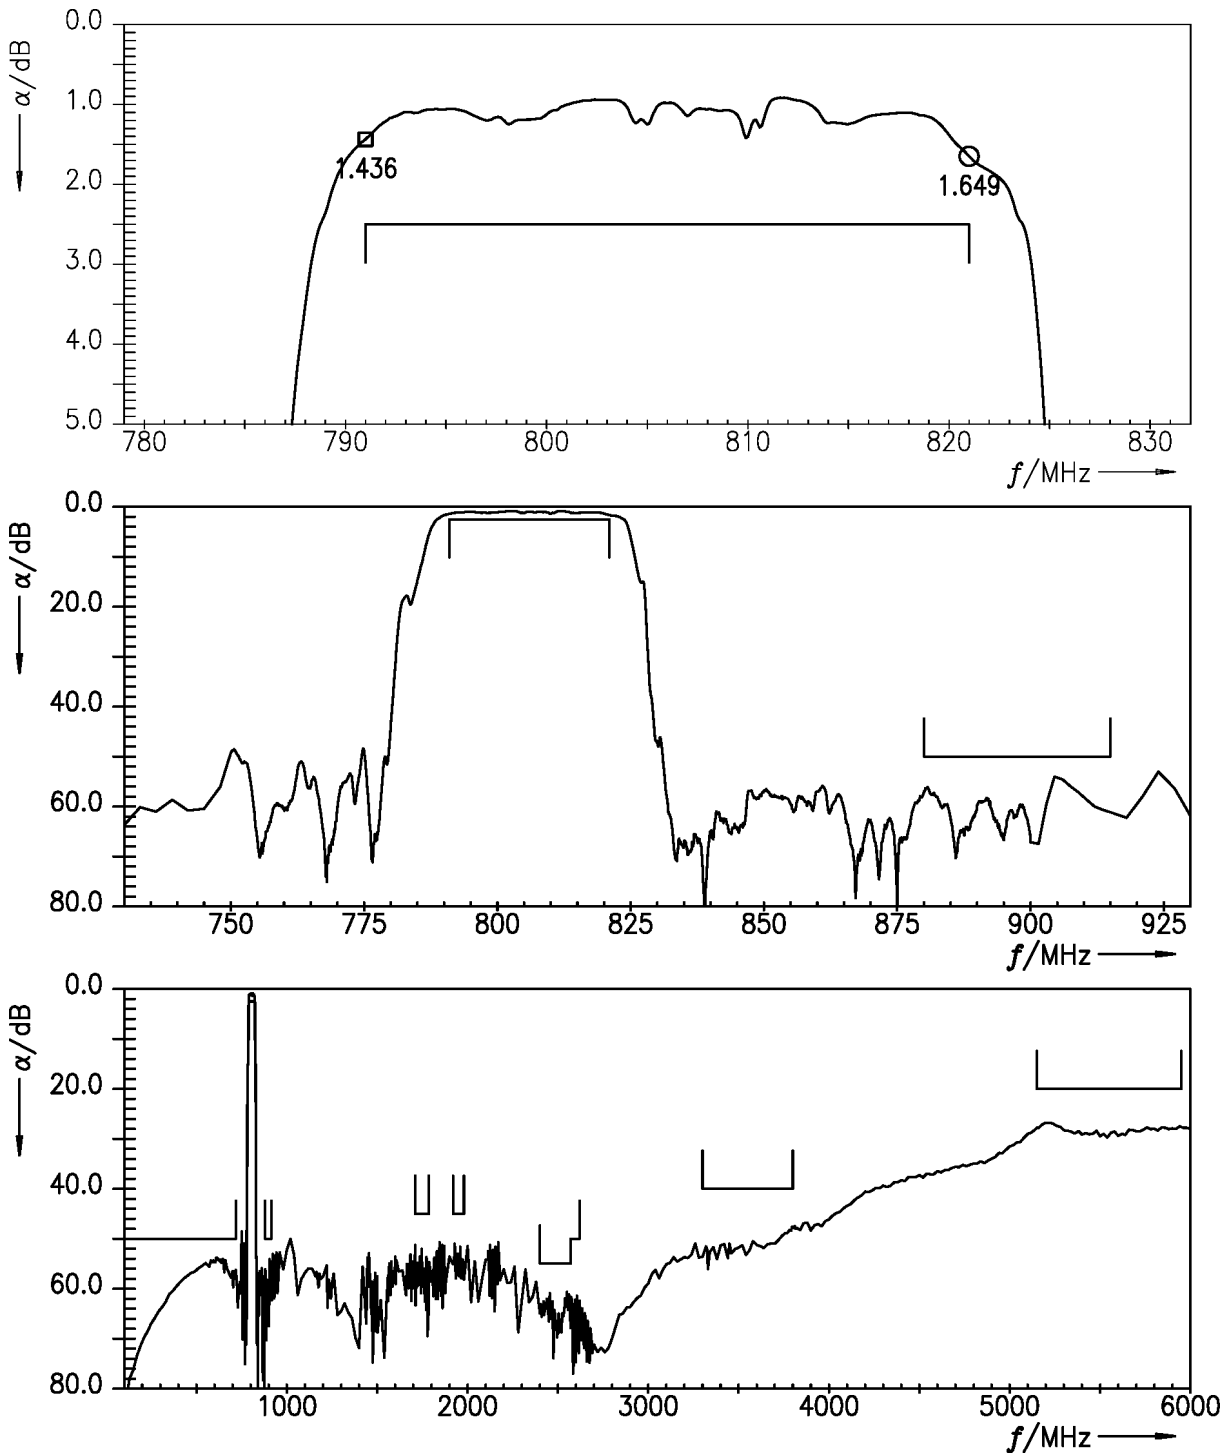


Figure 4: Attenuation ANT – RX.

8.3 TX – RX

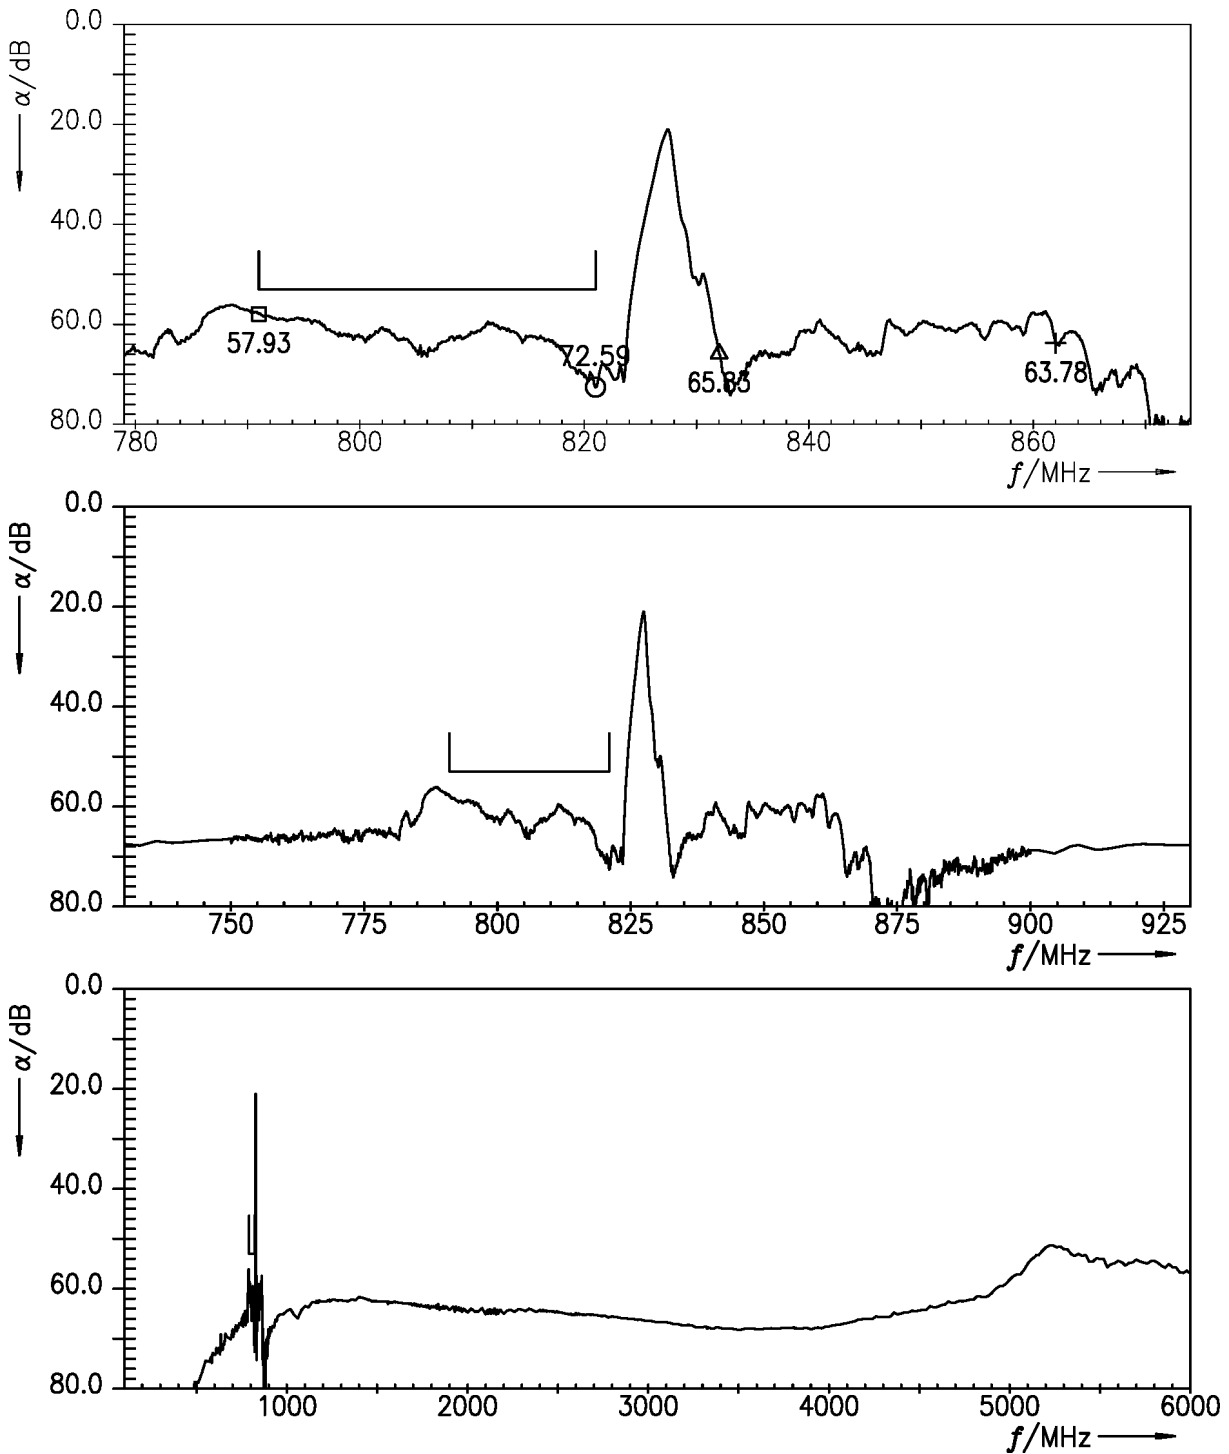


Figure 5: Isolation TX – RX.

9 Transmission coefficients (LTE)

9.1 ANT – RX

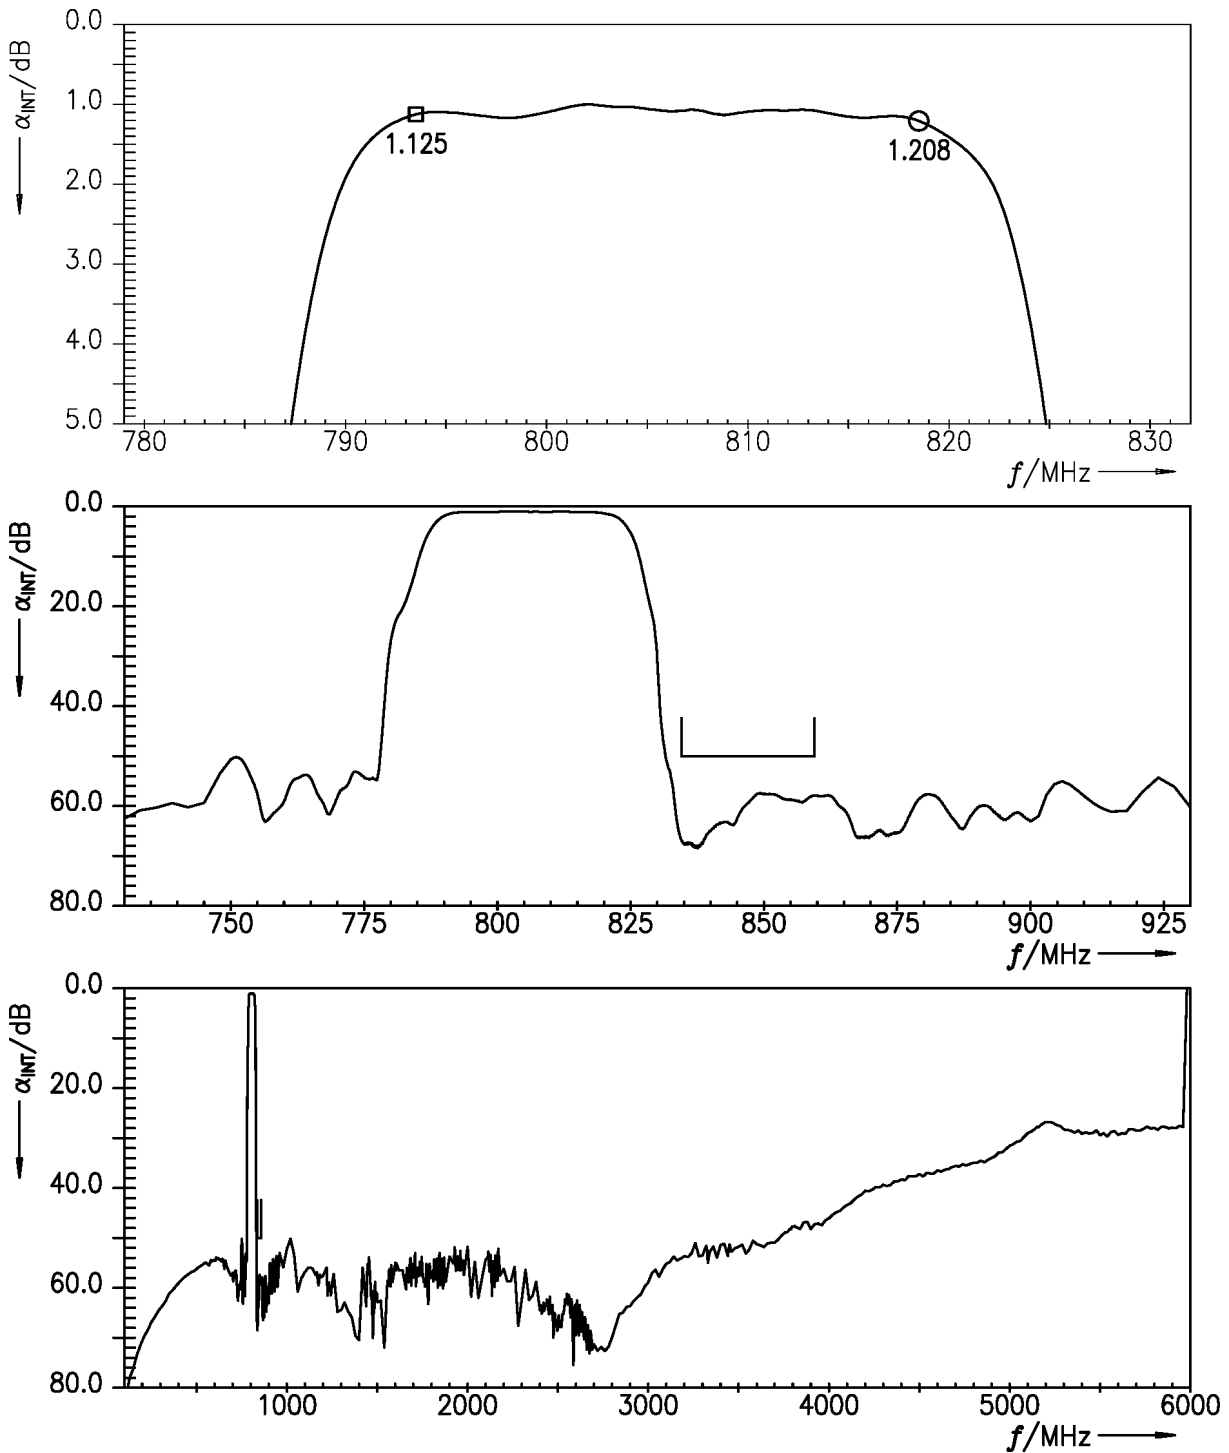


Figure 6: Attenuation (LTE) (integration window = 5 MHz) ANT – RX.

9.2 TX – RX

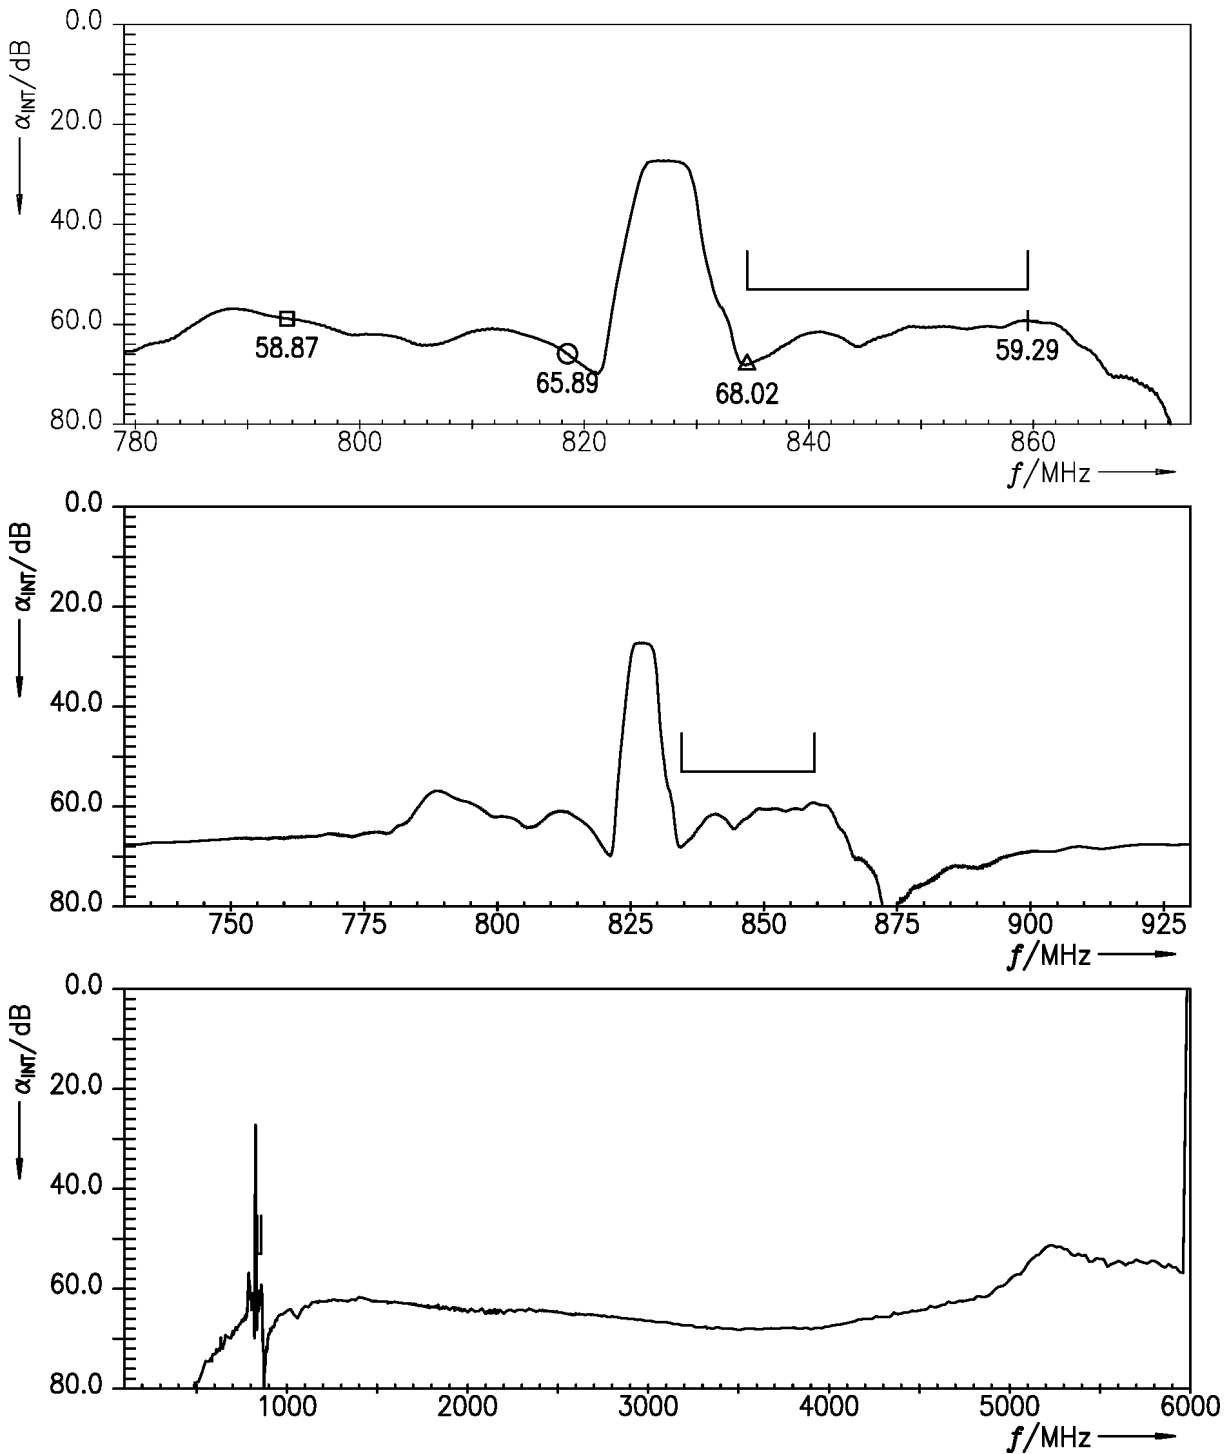


Figure 7: Isolation (LTE) (integration window = 5 MHz) TX – RX.



10 Reflection coefficients

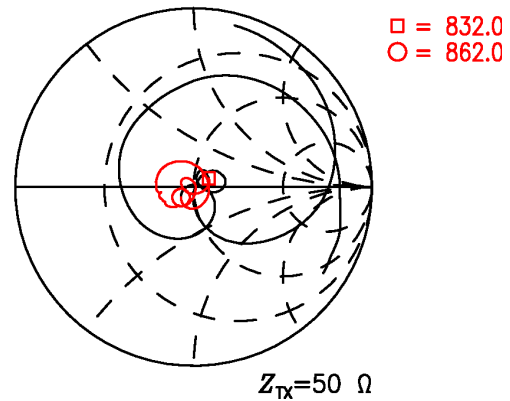
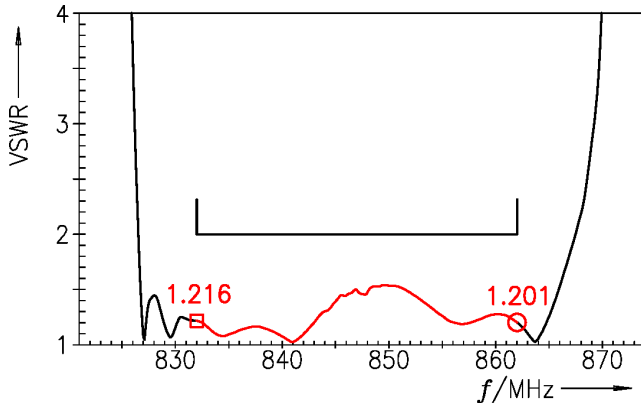


Figure 8: Reflection coefficient at TX port.

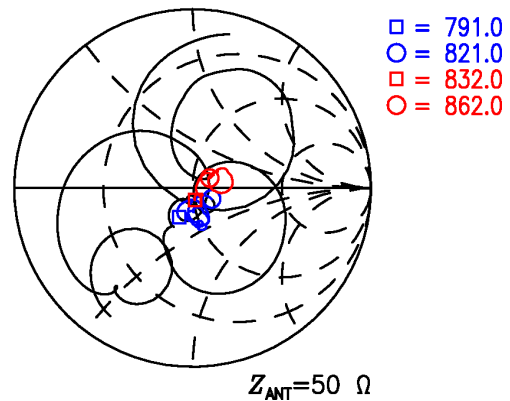
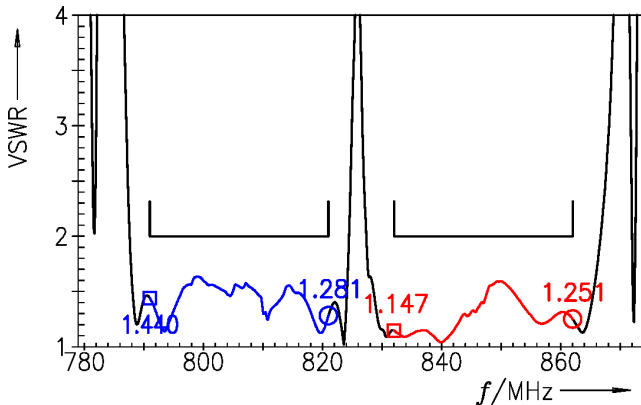


Figure 9: Reflection coefficient at ANT port.


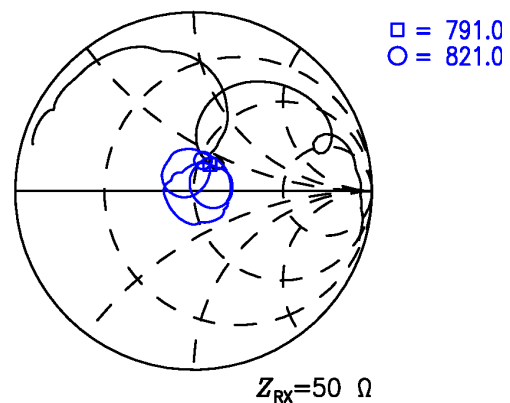


Figure 10: Reflection coefficient at RX port.

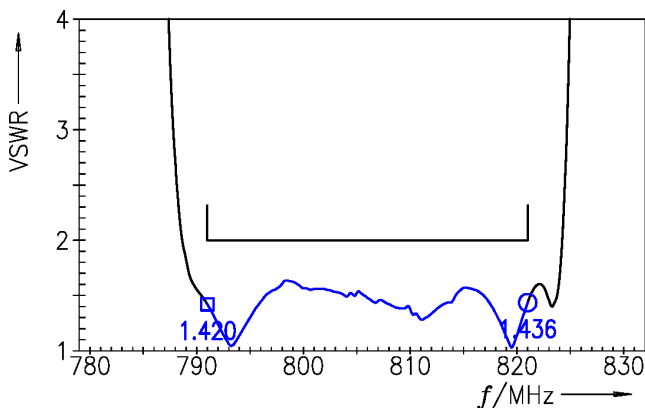

11 Packing material

11.1 Tape

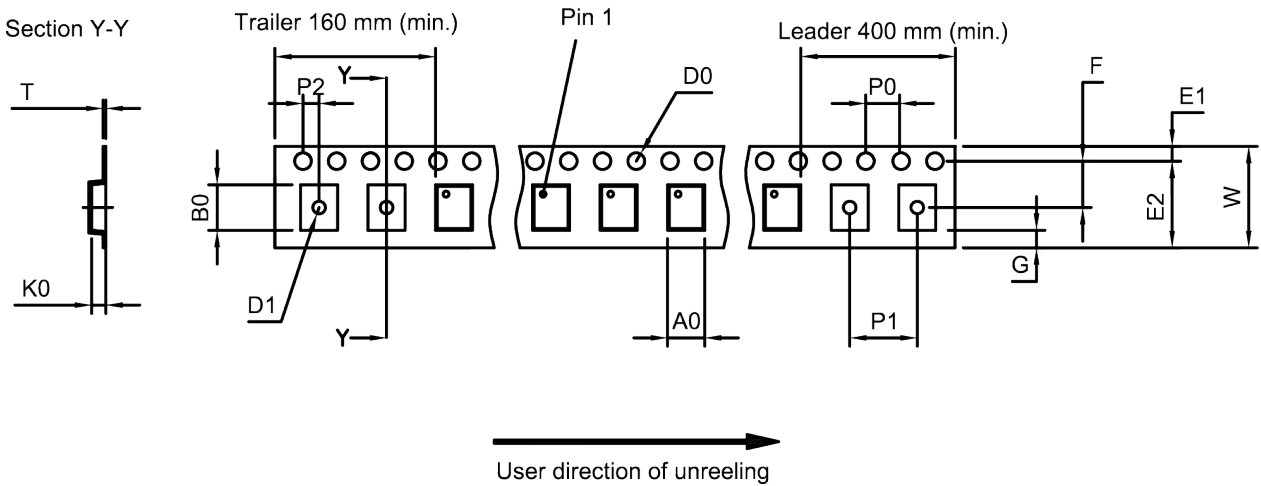


Figure 11: Drawing of tape (first-angle projection) for illustration only and not to scale. The valid tape dimensions are listed in Table 1.

A <sub>0</sub>	1.5±0.05 mm	E <sub>2</sub>	6.25 mm (min.)	P <sub>1</sub>	4.0±0.1 mm
B <sub>0</sub>	1.9±0.05 mm	F	3.5±0.05 mm	P <sub>2</sub>	2.0±0.05 mm
D <sub>0</sub>	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.03 mm
D <sub>1</sub>	0.8+0.1/-0 mm	K <sub>0</sub>	0.63±0.05 mm	W	8.0+0.3/-0.1 mm
E <sub>1</sub>	1.75±0.1 mm	P <sub>0</sub>	4.0±0.1 mm		

Table 1: Tape dimensions.

11.2 Reel with diameter of 180 mm

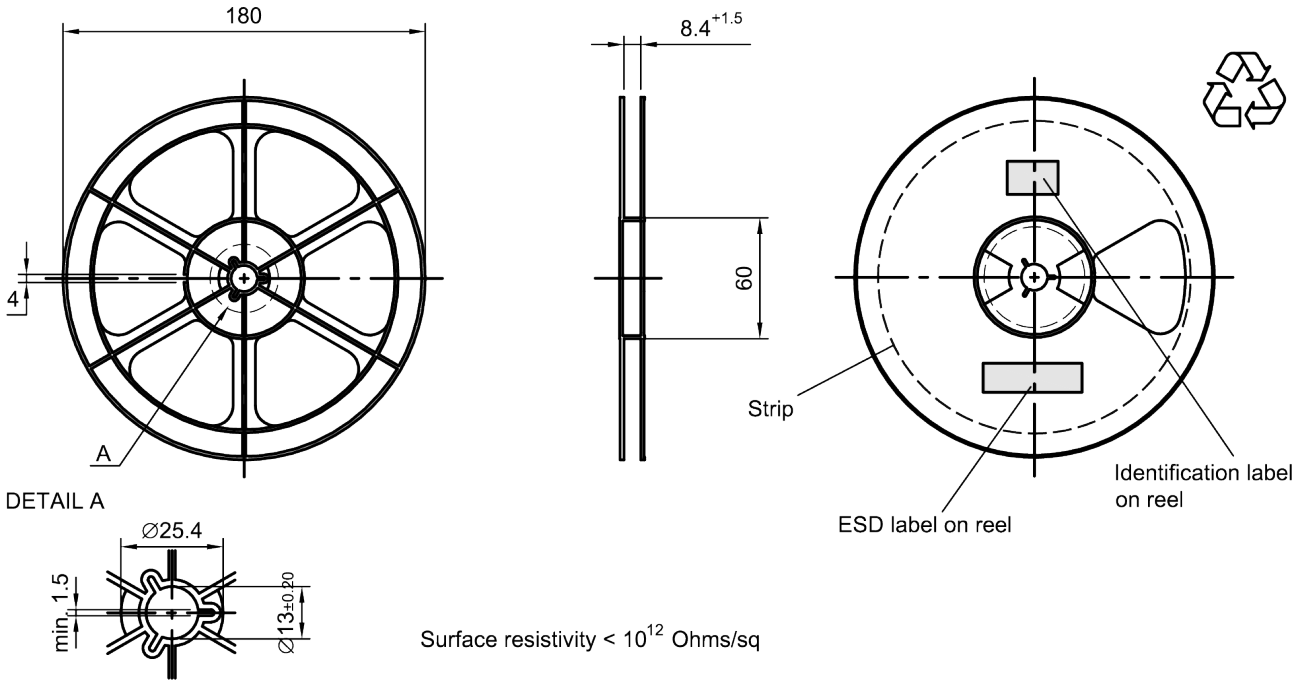


Figure 12: Drawing of reel (first-angle projection) with diameter of 180 mm.

Dimensions [mm]

X = 220+5

Y = 235+5

Sealing area 10±3

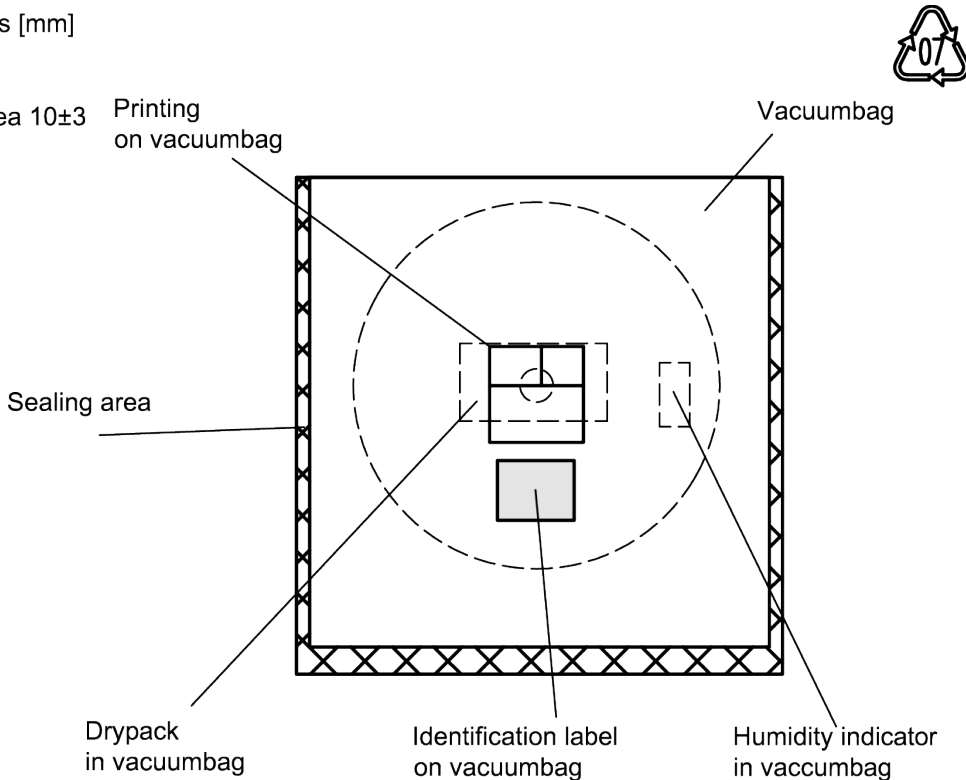


Figure 13: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

Dimensions [mm]  
L = 188  
B = 188  
H = 30  
Tolerance  $\pm 5$

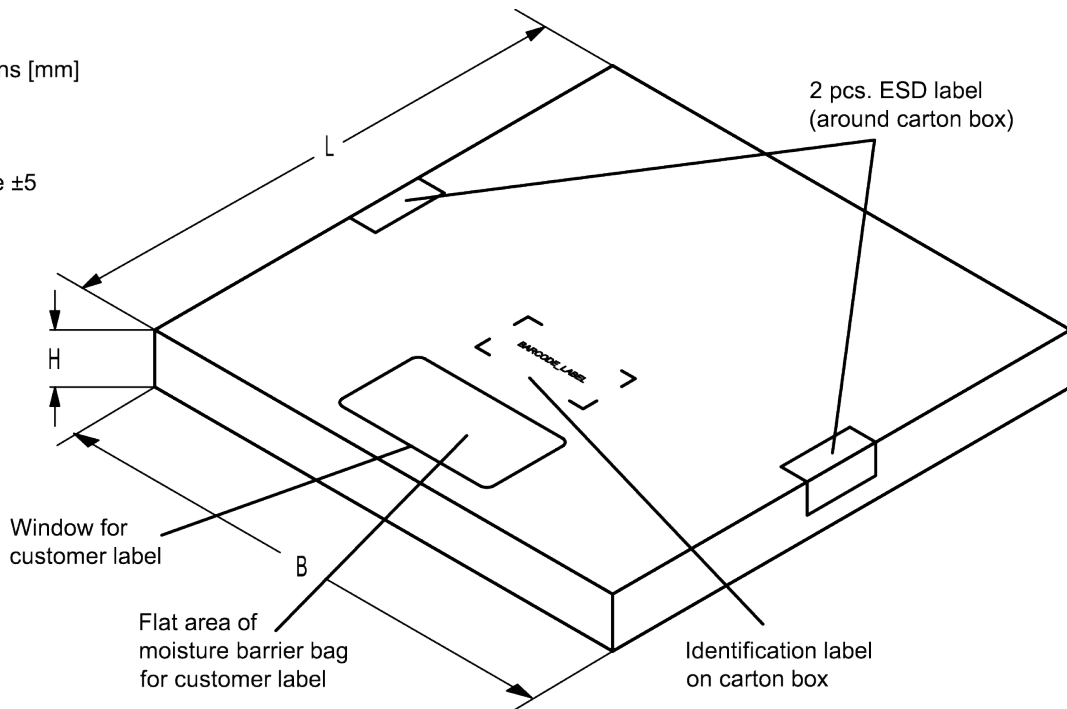


Figure 14: Drawing of folding box for reel with diameter of 180 mm.

11.3 Reel with diameter of 330 mm

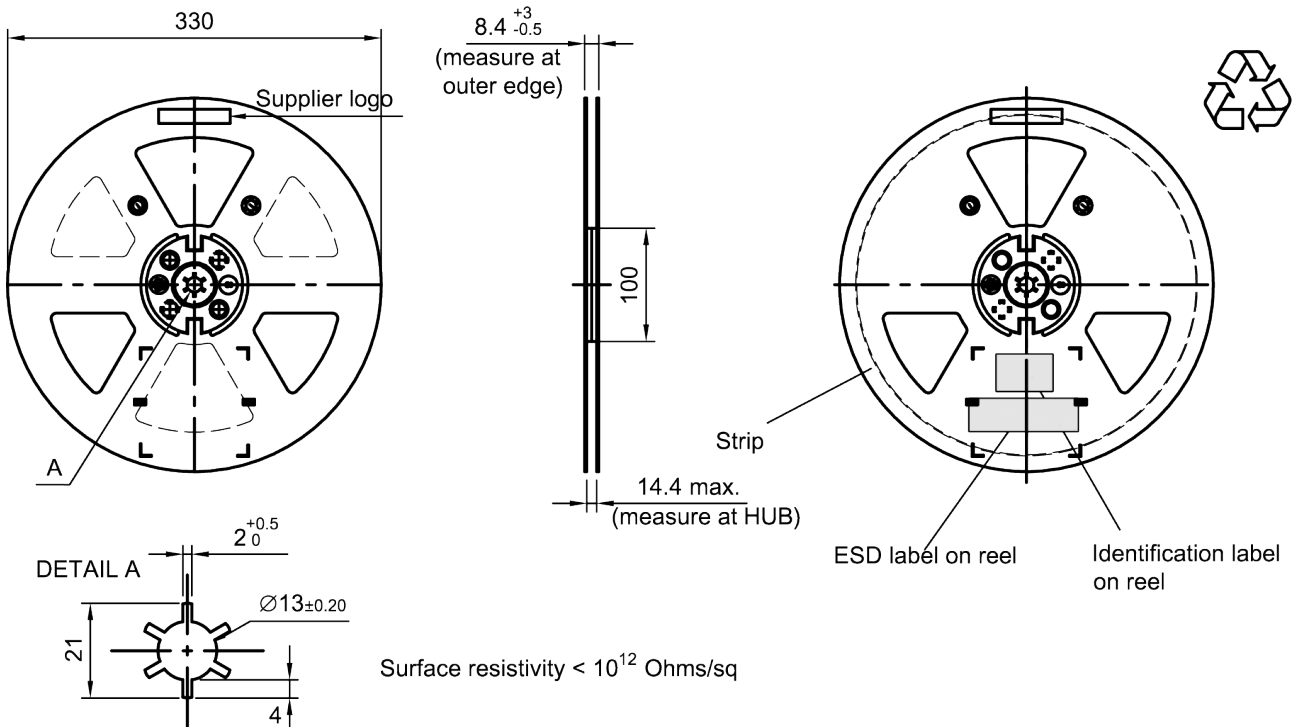



Figure 15: Drawing of reel (first-angle projection) with diameter of 330 mm.

Dimensions [mm]

X = 400+5

Y = 418+5

Sealing area 10±3

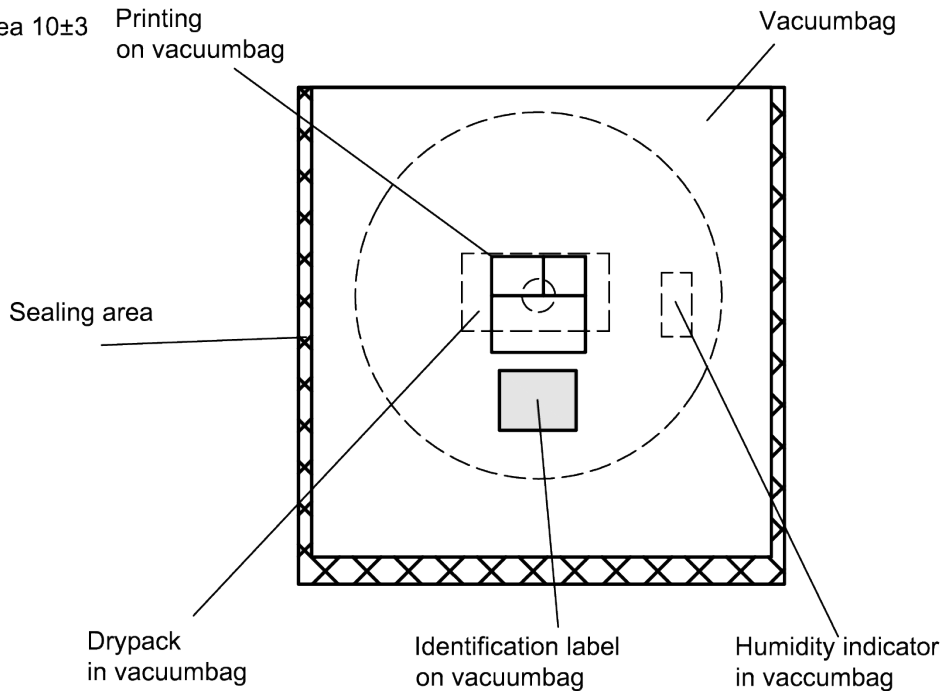

**Figure 16:** Drawing of moisture barrier bag (MBB) for reel with diameter of 330 mm.

Dimensions [mm]

L = 335


B = 338

H = 36 ( for 8 mm tape width)

40 ( for 12 mm tape width)

Tolerance ±5

2 pcs. ESD label  
(around carton box)

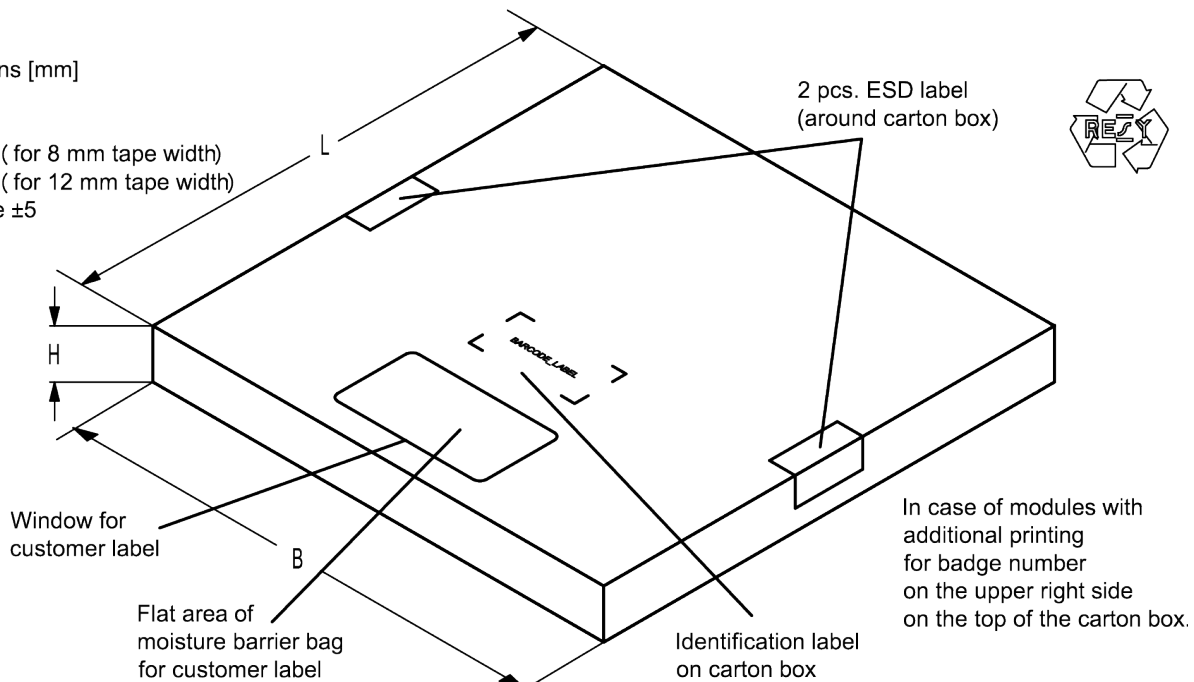

**Figure 17:** Drawing of folding box for reel with diameter of 330 mm.

**12 Marking**

Products are marked with product type number and lot number encoded according to Table 2:

■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx,  
is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding type number marking on device in decimal code.  
**16J** => **1234**  
 $1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0 =$  **1234**  
 The BASE32 code for product type B1256 is 178.

■ Lot number:

The last 5 digits of the lot number, e.g., **12345**,  
are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device in decimal code.  
**5UY** => **12345**  
 $5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0 =$  **12345**

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		


**Table 2:** Lists for encoding and decoding of marking.

### 13 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3<sup>rd</sup> edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
T > 220 °C	30 s to 70 s
T > 230 °C	min. 10 s
T > 245 °C	max. 20 s
T ≥ 255 °C	–
peak temperature $T_{peak}$	250 °C +0/-5 °C
wetting temperature $T_{min}$	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature T	measured at solder pads

**Table 3:** Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

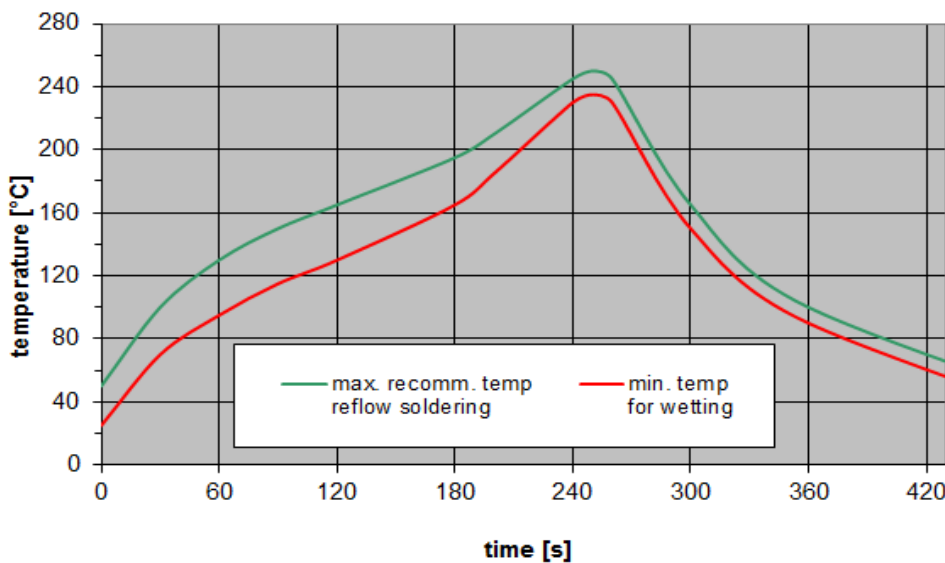

**Figure 18:** Recommended reflow profile for convection and infrared soldering – lead-free solder.

## 14 Annotations

### 14.1 RoHS compatibility

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

### 14.2 Scattering parameters (S-parameters)

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

### 14.3 Ordering codes and packing units

Ordering code	Packing unit
B39851B1256L210S 5	5000 pcs
B39851B1256L210W 5	5000 pcs

**Table 4:** Ordering codes and packing units.



## 15 Cautions and warnings

### 15.1 Display of ordering codes for RF360 products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under <https://rfe.qualcomm.com/>.

### 15.2 Material information

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

### 15.3 Moldability

Before using in overmolding environment, please contact your local RF360 sales office.

### 15.4 Package information

#### Landing area

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

#### Dimensions

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

#### Projection method

Unless otherwise specified first-angle projection is applied.

## 16 Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (<https://rfe.qualcomm.com>). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)