



RF360  
Europe GmbH

## Data sheet

SAW duplexer  
LTE / 5G band 7

Part number:	B1282
Ordering code:	B39272B1282L210
Date:	March 29, 2022
Version:	2.4

DCN: 80-PA243-520 Rev. E

Qualcomm products mentioned herein are products of Qualcomm Technologies, Inc. and/or its subsidiaries.

RF360 Europe GmbH  
Anzinger Straße 13  
81671 Munich, Germany

© 2022 Qualcomm Technologies, Inc. and/or its subsidiaries. All rights reserved

These materials, including the information contained herein, may be used only for informational purposes by the customer. Qualcomm Technologies, Inc. and/or its subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein and reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, without warranty, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm is a trademark or registered trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

**Table of contents**

1 [Application](#)..... 4  
2 [Features](#)..... 4  
3 [Package](#)..... 5  
4 [Pin configuration](#)..... 5  
5 [Matching circuit](#)..... 6  
6 [Characteristics](#)..... 7  
7 [Maximum ratings](#)..... 11  
8 [Transmission coefficients](#)..... 12  
9 [Reflection coefficients](#)..... 15  
10 [Packing material](#)..... 16  
11 [Marking](#)..... 20  
12 [Soldering profile](#)..... 21  
13 [Annotations](#)..... 22  
14 [Cautions and warnings](#)..... 23  
15 [Important notes](#)..... 24

## 1 Application


- Duplexer for 4G and 5G Band 7
- LTE band 7 uplink: 2535 MHz (pass band 70 MHz)
- LTE band 7 downlink: 2655 MHz (pass band 70 MHz)
- Qualcomm® micro-Acoustic Power Management (MAPM)
- Low insertion attenuation
- Low amplitude ripple

## 2 Features

- Package size  $1.6_{\pm 0.05}$  mm  $\times$   $1.2_{\pm 0.05}$  mm
- Package height 0.6 mm (max.)
- Approximate weight 3 mg
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 3 (MSL3)


### 3 Package

BOTTOM VIEW

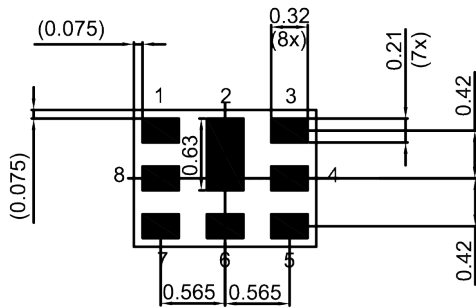


Pad and pitch tolerance  $\pm 0.05$

SIDE VIEW




TOP VIEW



- 1) Marking for pad number 1
- 2) Example of encoded lot number
- 3) Example of encoded filter type number

Land pattern  
THRU VIEW

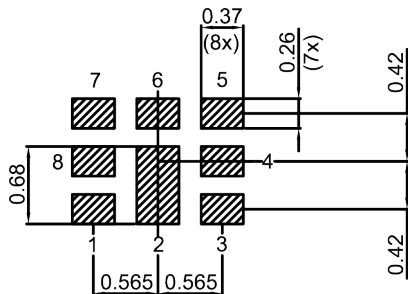

Landing pad tolerance  $-0.02$

**Figure 1:** Drawing of package with package height A = 0.6 mm (max.). See Sec. Package information (p. 23).

### 4 Pin configuration

- 1 RX
- 3 TX
- 6 ANT
- 2, 4, 5, 7, 8 Ground

5 Matching circuit

- $L_{p6} = 2.5 \text{ nH}$

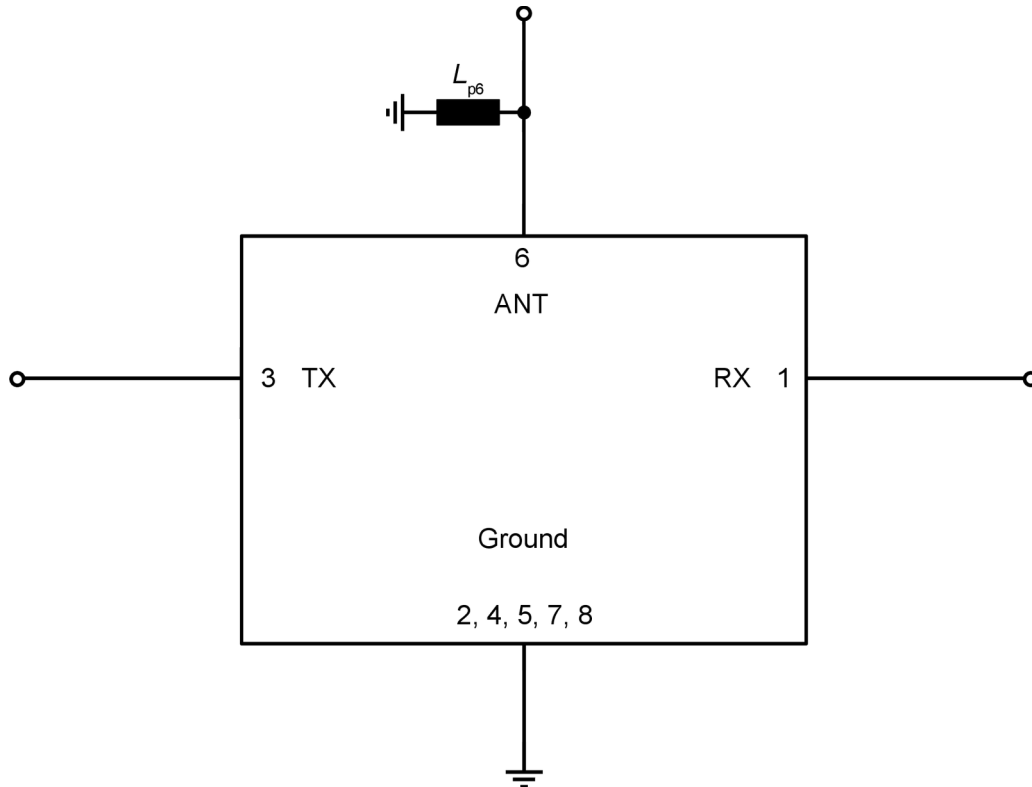


Figure 2: Schematic of matching circuit.

External shunt inductor for ESD protection is recommended at any ports towards antenna.

6 Characteristics

6.1 TX – ANT

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 $\Omega$
ANT terminating impedance	$Z_{ANT}$	= 50 $\Omega$ // 2.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 $\Omega$

Characteristics TX – ANT				min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>			$f_C$	—	2535	—	MHz
<b>Maximum insertion attenuation</b>			$\alpha_{max}$				
	2500.25... 2569.75	MHz		—	1.5	2.2 <sup>2)</sup>	dB
	2500.25... 2569.75	MHz		—	1.5	2.4	dB
<b>Amplitude ripple (p-p)</b>			$\Delta\alpha$				
	2500.25... 2569.75	MHz		—	0.6	1.3 <sup>2)</sup>	dB
	2500.25... 2569.75	MHz		—	0.6	1.5	dB
<b>Maximum VSWR</b>			VSWR <sub>max</sub>				
@ TX port	2500.25... 2569.75	MHz		—	1.5	2.0	
@ ANT port	2500.25... 2569.75	MHz		—	1.4	2.0	
<b>Average attenuation</b>			$\alpha_{WLAN,avg}$ <sup>3)</sup>				
Wi-fi Channel 1	2403... 2421	MHz		42	56	—	dB
Wi-fi Channel 2	2408... 2426	MHz		42	56	—	dB
Wi-fi Channel 3	2413... 2431	MHz		40	54	—	dB
Wi-fi Channel 4	2418... 2436	MHz		40	52	—	dB
Wi-fi Channel 5	2423... 2441	MHz		40	50	—	dB
Wi-fi Channel 6	2428... 2446	MHz		40	49	—	dB
Wi-fi Channel 7	2433... 2451	MHz		40	49	—	dB
Wi-fi Channel 8	2438... 2456	MHz		40	49	—	dB
Wi-fi Channel 9	2443... 2461	MHz		40	51	—	dB
Wi-fi Channel 10	2448... 2466	MHz		32	54	—	dB
Wi-fi Channel 11	2453... 2471	MHz		10	48	—	dB
Wi-fi Channel 12	2458... 2476	MHz		5	36	—	dB
Wi-fi Channel 13	2463... 2481	MHz		3	21	—	dB
<b>Minimum attenuation</b>			$\alpha_{min}$				
	10... 1100	MHz		35	47	—	dB
	1166... 1187	MHz		35	45	—	dB
	1226... 1250	MHz		35	45	—	dB
	1452... 1496	MHz		35	42	—	dB
	1559... 1563	MHz		35	41	—	dB
	1565.42... 1573.37	MHz		35	41	—	dB
	1573.37... 1577.47	MHz		35	41	—	dB
	1577.47... 1585.42	MHz		35	41	—	dB
	1597.55... 1605.89	MHz		35	41	—	dB

Characteristics TX – ANT	min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
1710... 1785 MHz	35	39	—	dB
1805... 1880 MHz	35	38	—	dB
2010... 2025 MHz	32	38	—	dB
2110... 2200 MHz	32	38	—	dB
2620... 2690 MHz	45 <sup>4)</sup>	56	—	dB
2620.25... 2689.75 MHz	37	56	—	dB
3300... 3800 MHz	30	34	—	dB
3300... 4200 MHz	30	34	—	dB
4900... 5950 MHz	40	48	—	dB
5000... 5140 MHz	38	53	—	dB
7500... 7710 MHz	29	38	—	dB

- 1) See Sec. Matching circuit (p. 6).
- 2) Valid for typical temperature  $T = +25$  °C.
- 3) Average over each WLAN channel with band width of 18 MHz.
- 4) Valid for temperature  $T = -20$  °C...+85 °C.



6.2 ANT – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 2.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω

Characteristics ANT – RX		min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Center frequency</b>	$f_C$	—	2655	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$				
	2620.25... 2689.75 MHz	—	1.6	2.4 <sup>2)</sup>	dB
	2620.25... 2689.75 MHz	—	1.6	2.6	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
	2620.25... 2689.75 MHz	—	0.5	1.3 <sup>2)</sup>	dB
	2620.25... 2689.75 MHz	—	0.5	1.5	dB
<b>Maximum VSWR</b>					
					VSWR <sub>max</sub>
@ ANT port	2620.25... 2689.75 MHz	—	1.7	2.0	
@ RX port	2620.25... 2689.75 MHz	—	1.6	2.0	
<b>Minimum attenuation</b>					
	45 MHz	47	102	—	dB
	50... 2300 MHz	36 <sup>3)</sup>	40	—	dB
	663... 862 MHz	45	54	—	dB
	880... 915 MHz	45	53	—	dB
	1710... 1785 MHz	40	42	—	dB
	1850... 1915 MHz	36	41	—	dB
	1920... 1980 MHz	35	40	—	dB
	2300... 2400 MHz	36	40	—	dB
	2305... 2315 MHz	36	40	—	dB
	2400... 2500 MHz	35	42	—	dB
	2500.25... 2569.75 MHz	42	56	—	dB
	3300... 3800 MHz	37	40	—	dB
	3300... 4200 MHz	37	40	—	dB
	4900... 5950 MHz	41	47	—	dB

1) See Sec. Matching circuit (p. 6).  
 2) Valid for typical temperature  $T = +25$  °C.  
 3) Valid for temperature  $T = -20$  °C...+85 °C.

6.3 TX – RX

Temperature range for specification	$T_{SPEC}$	= -30 °C ... +85 °C
TX terminating impedance	$Z_{TX}$	= 50 Ω
ANT terminating impedance	$Z_{ANT}$	= 50 Ω // 2.5 nH <sup>1)</sup>
RX terminating impedance	$Z_{RX}$	= 50 Ω

Characteristics TX – RX		min. for $T_{SPEC}$	typ. @ +25 °C	max. for $T_{SPEC}$	
<b>Minimum isolation</b>	$\alpha_{min}$				
	2500.25... 2569.75 MHz	53 <sup>2)</sup>	55	—	dB
	2500.25... 2569.75 MHz	53	55	—	dB
	2620.25... 2689.75 MHz	53 <sup>2)</sup>	58	—	dB
	2620.25... 2689.75 MHz	50	58	—	dB

1) See Sec. Matching circuit (p. 6).  
2) Valid for typical temperature  $T = +25$  °C.

## 7 Maximum ratings

Storage temperature	$T_{STG}^{1)} = -40\text{ °C} \dots +85\text{ °C}$	
DC voltage	$ V_{DC}  = 5.0\text{ V (max.)}$	
ESD voltage		
	$V_{ESD}^{2)} = 125\text{ V (max.)}$	Machine model.
	$V_{ESD}^{3)} = 225\text{ V (max.)}$	Human body model.
	$V_{ESD}^{4)} = 700\text{ V (max.)}$	Charged device model.
Input power	$P_{IN}$	
@ TX port: 2500 ... 2570 MHz	31 dBm	<ul style="list-style-type: none"> <li>■ 5 MHz LTE uplink signal 1 RB 5000 h @ 50 °C.</li> <li>■ 5 MHz 5G-NR (DFT-s-OFDM) 1 RB 5000 h @ 50 °C.</li> </ul>
@ TX port: 2500 ... 2570 MHz	29.5 dBm	<ul style="list-style-type: none"> <li>■ 5 MHz 5G-NR (CP-OFDM) 1 RB 5000 h @ 50 °C.</li> </ul>

<sup>1)</sup> Not valid for packaging material. Storage temperature for packaging material is -25 °C to +40 °C.

<sup>2)</sup> According to JESD22-A115B (MM – Machine Model), 10 negative & 10 positive pulses.

<sup>3)</sup> According to JESD22-A114F (HBM – Human Body Model), 1 negative & 1 positive pulse.

<sup>4)</sup> According to JESD22-C101C (CDM – Field Induced Charged Device Model), 3 negative & 3 positive pulses.

8 Transmission coefficients

8.1 TX – ANT

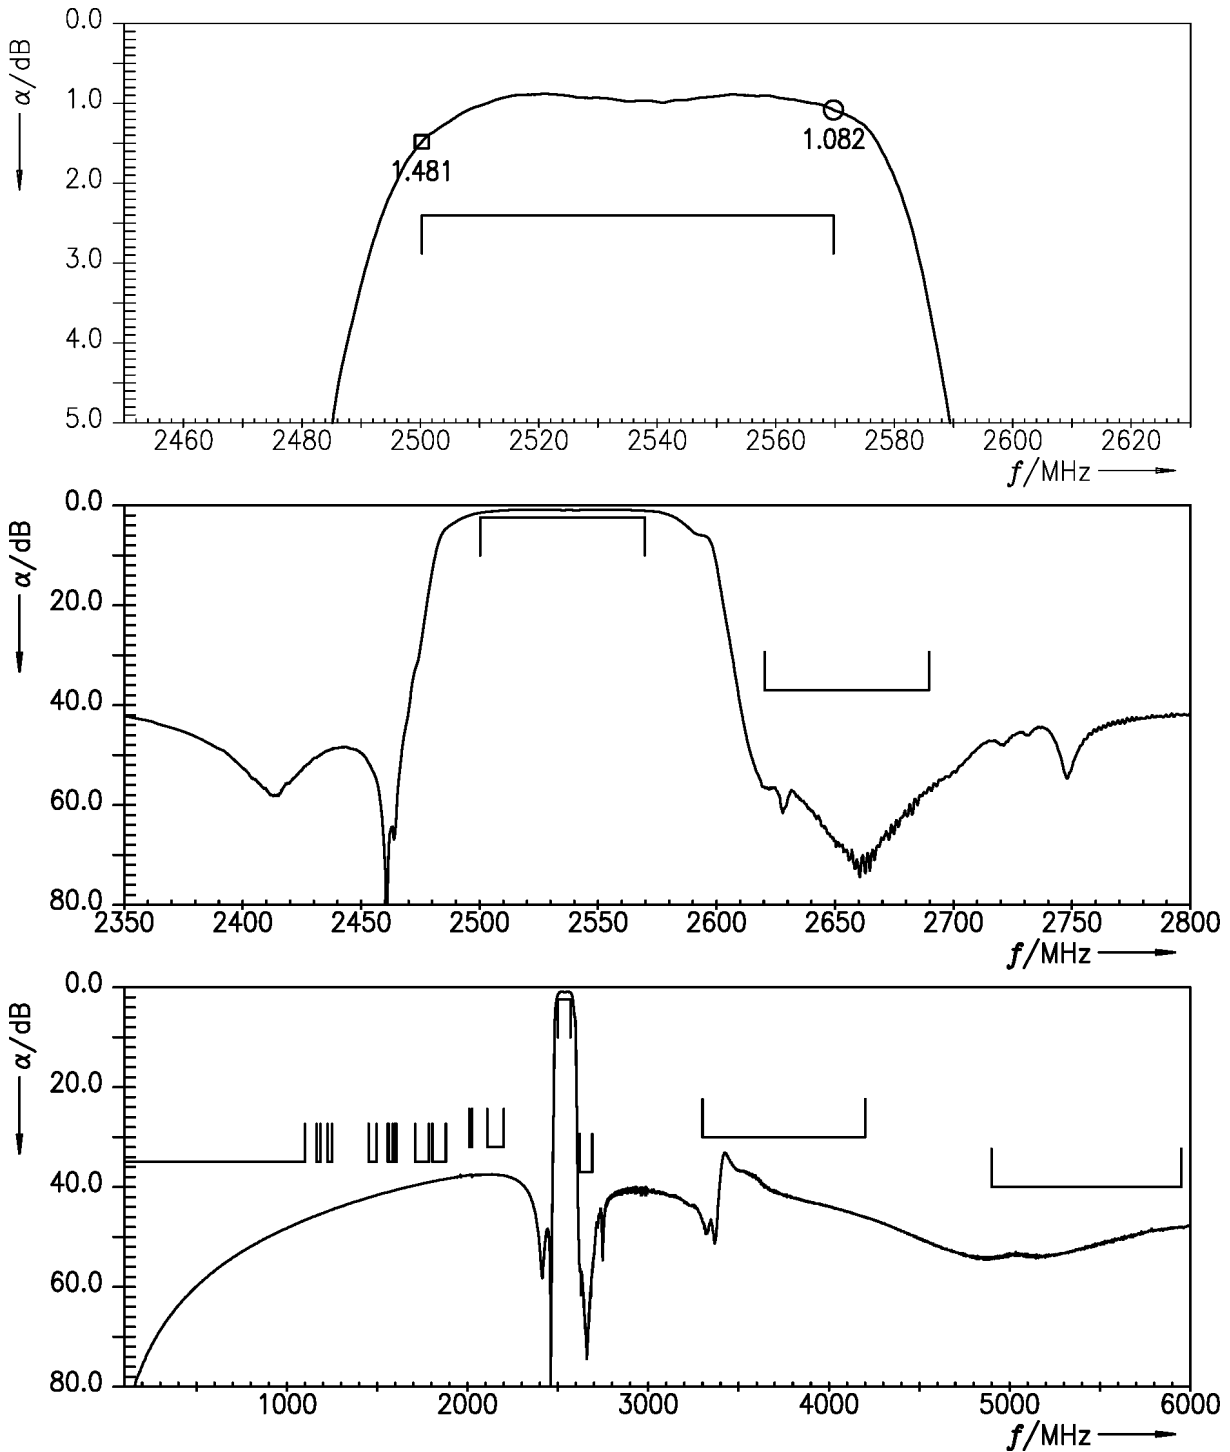


Figure 3: Attenuation TX – ANT.

8.2 ANT – RX

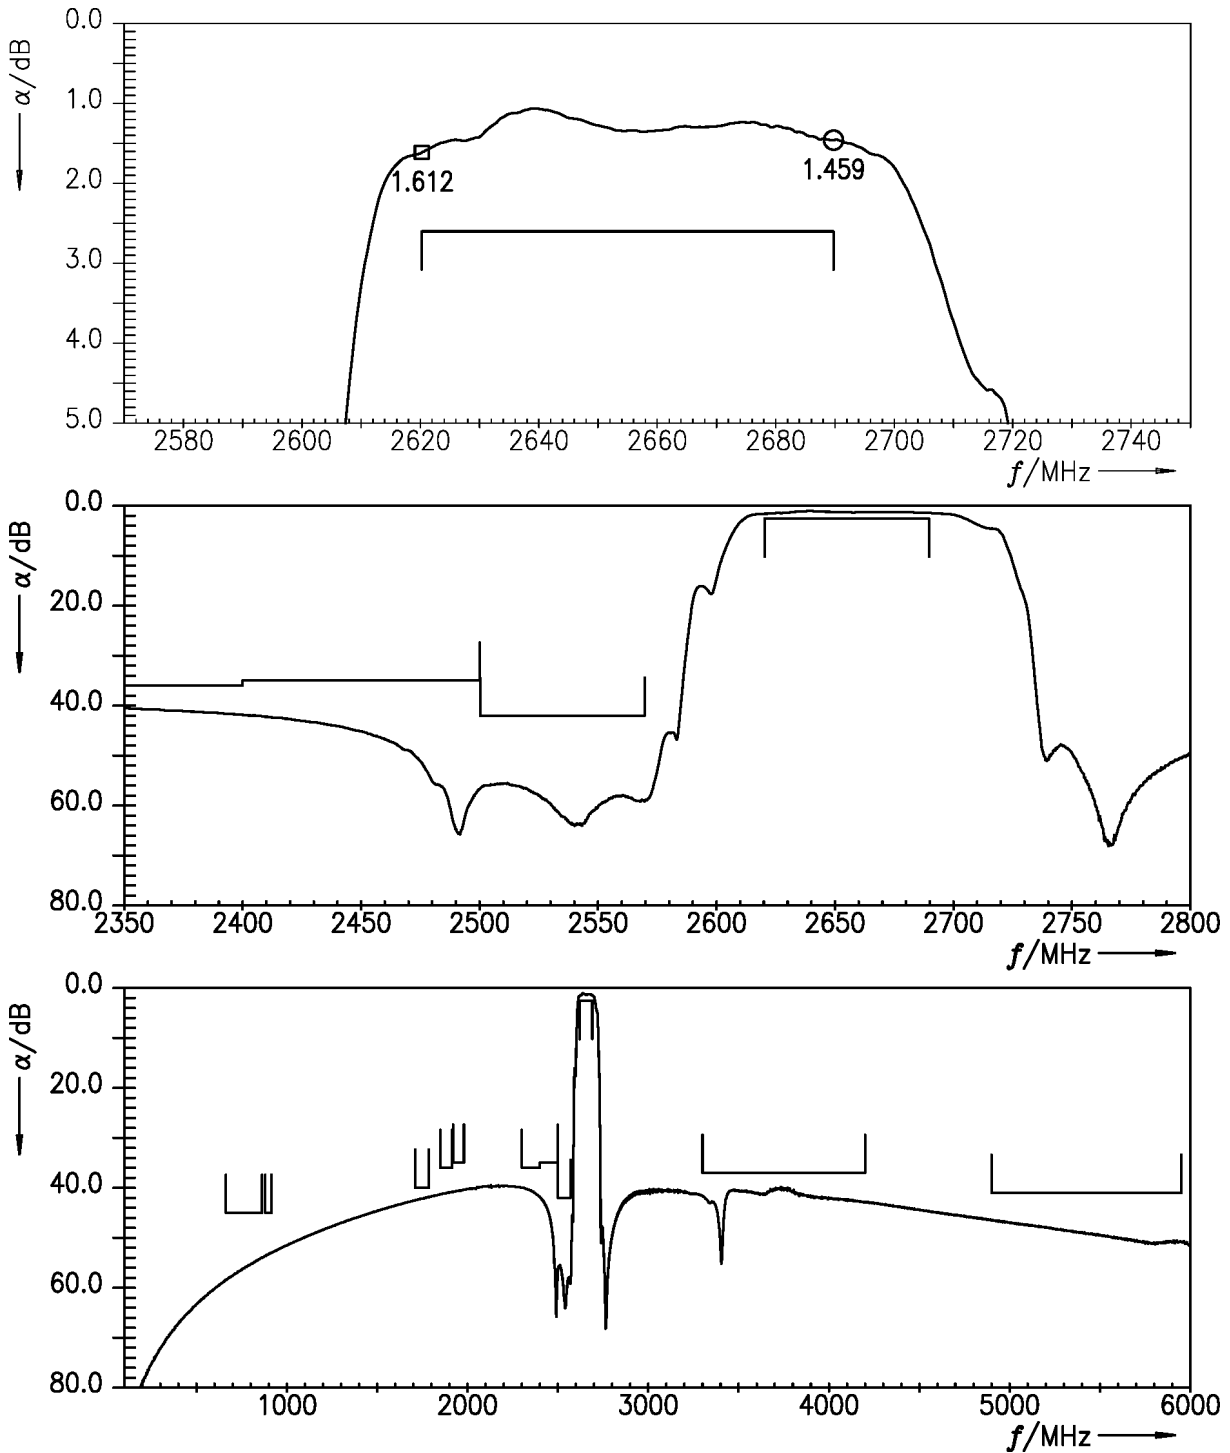


Figure 4: Attenuation ANT – RX.

8.3 TX – RX

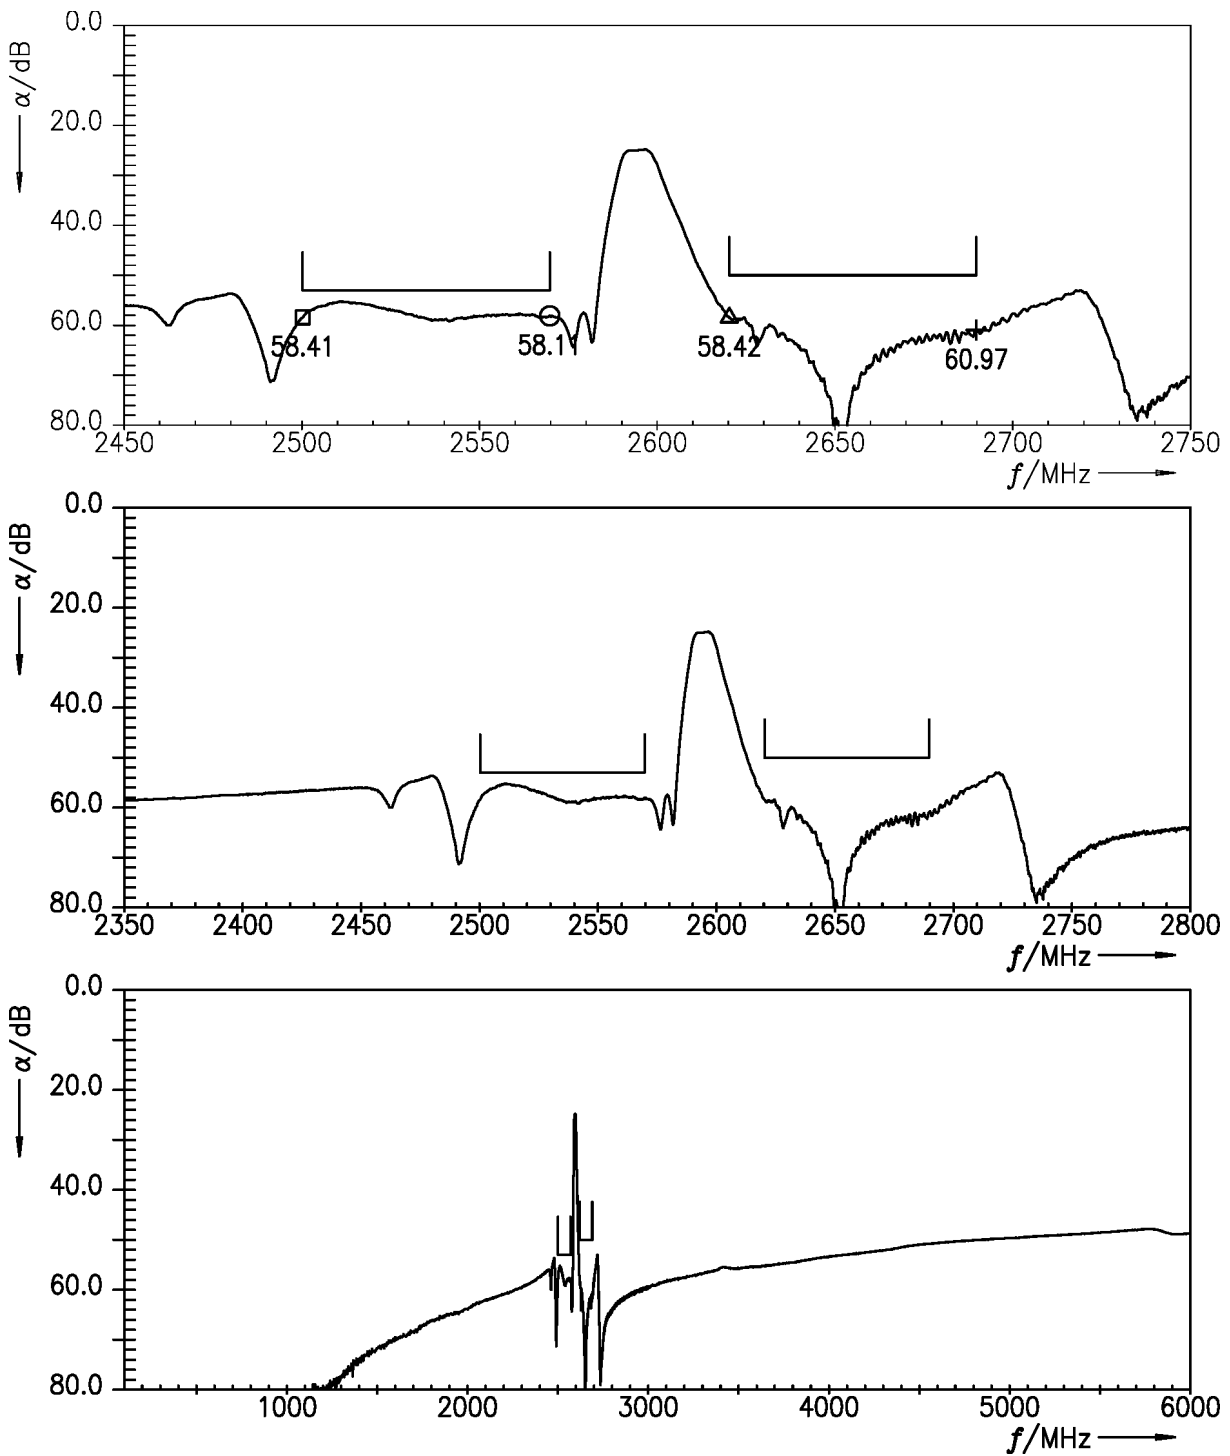


Figure 5: Isolation TX – RX.

9 Reflection coefficients

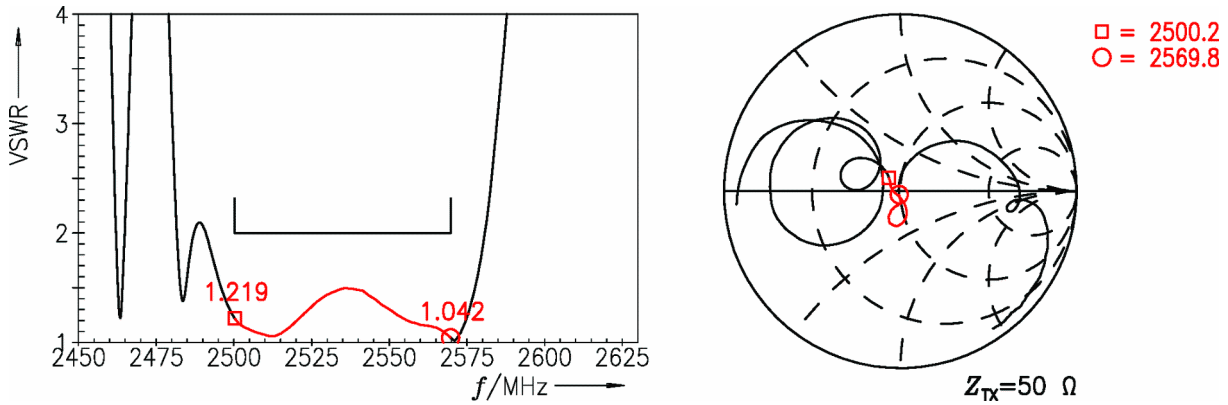


Figure 6: Reflection coefficient at TX port.

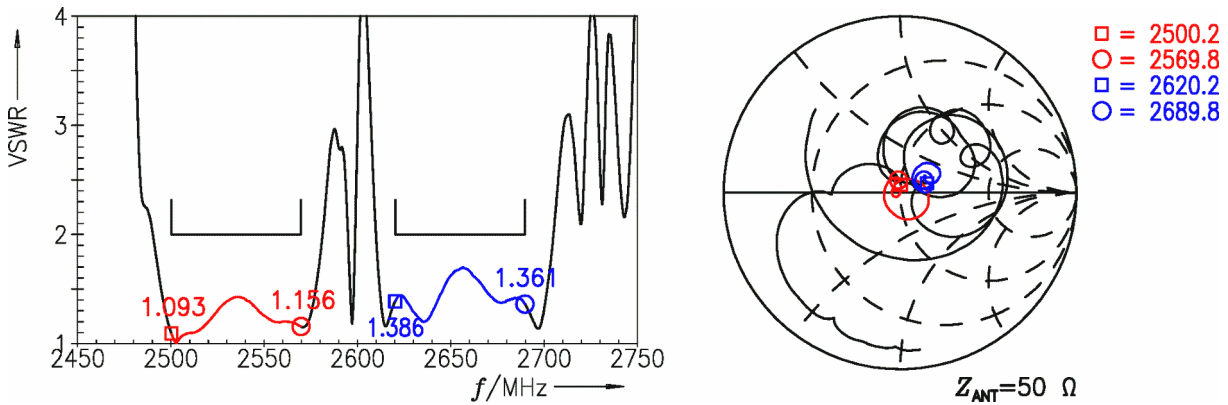


Figure 7: Reflection coefficient at ANT port (TX and RX frequencies).


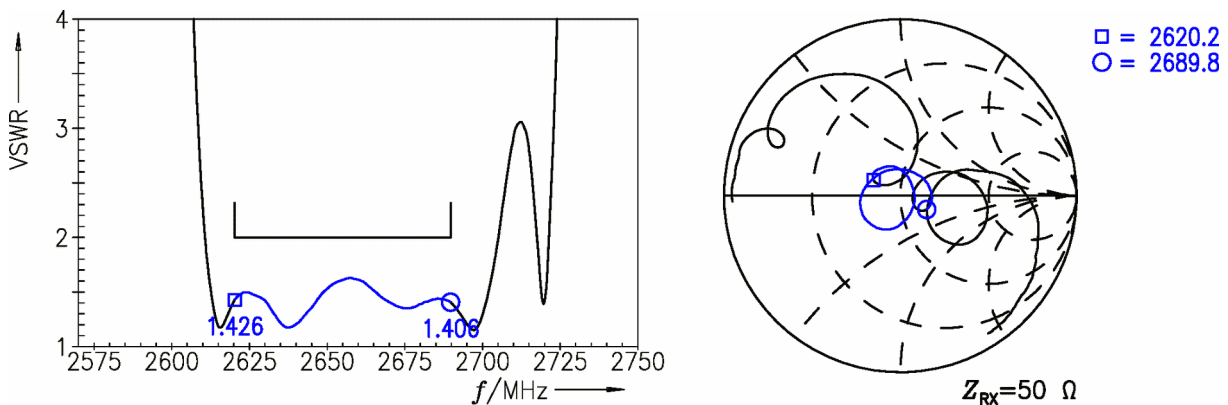


Figure 8: Reflection coefficient at RX port.

10 Packing material

10.1 Tape

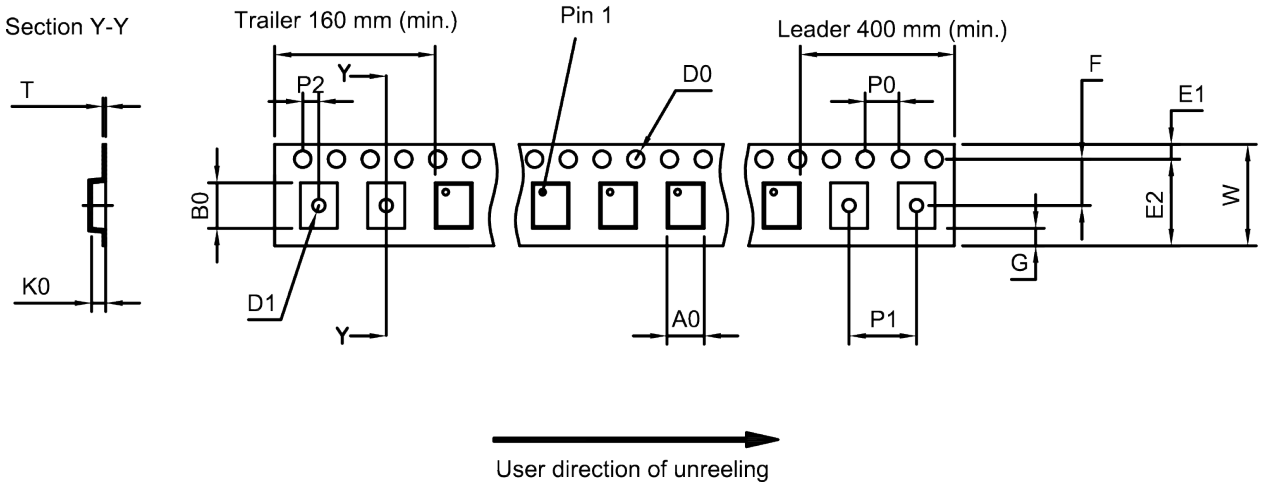

**Figure 9:** Drawing of tape (first-angle projection) for illustration only and not to scale. The valid tape dimensions are listed in Table 1.

A <sub>0</sub>	1.4±0.05 mm	E <sub>2</sub>	6.25 mm (min.)	P <sub>1</sub>	4.0±0.1 mm
B <sub>0</sub>	1.8±0.05 mm	F	3.5±0.05 mm	P <sub>2</sub>	2.0±0.05 mm
D <sub>0</sub>	1.5+0.1/-0 mm	G	0.75 mm (min.)	T	0.25±0.03 mm
D <sub>1</sub>	0.6+0.1/-0 mm	K <sub>0</sub>	0.7±0.05 mm	W	8.0+0.3/-0.1 mm
E <sub>1</sub>	1.75±0.1 mm	P <sub>0</sub>	4.0±0.1 mm		

**Table 1:** Tape dimensions.



10.2 Reel with diameter of 180 mm

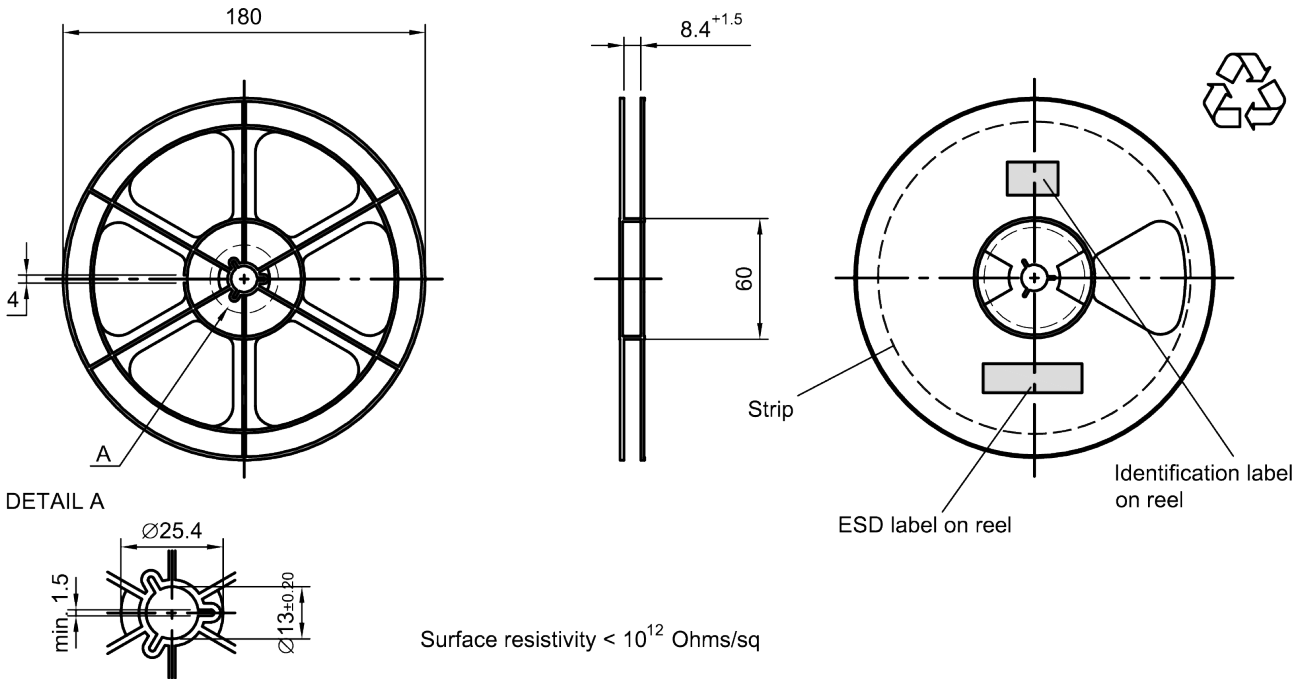


Figure 10: Drawing of reel (first-angle projection) with diameter of 180 mm.

Dimensions [mm]

X = 220+5

Y = 235+5

Sealing area 10±3

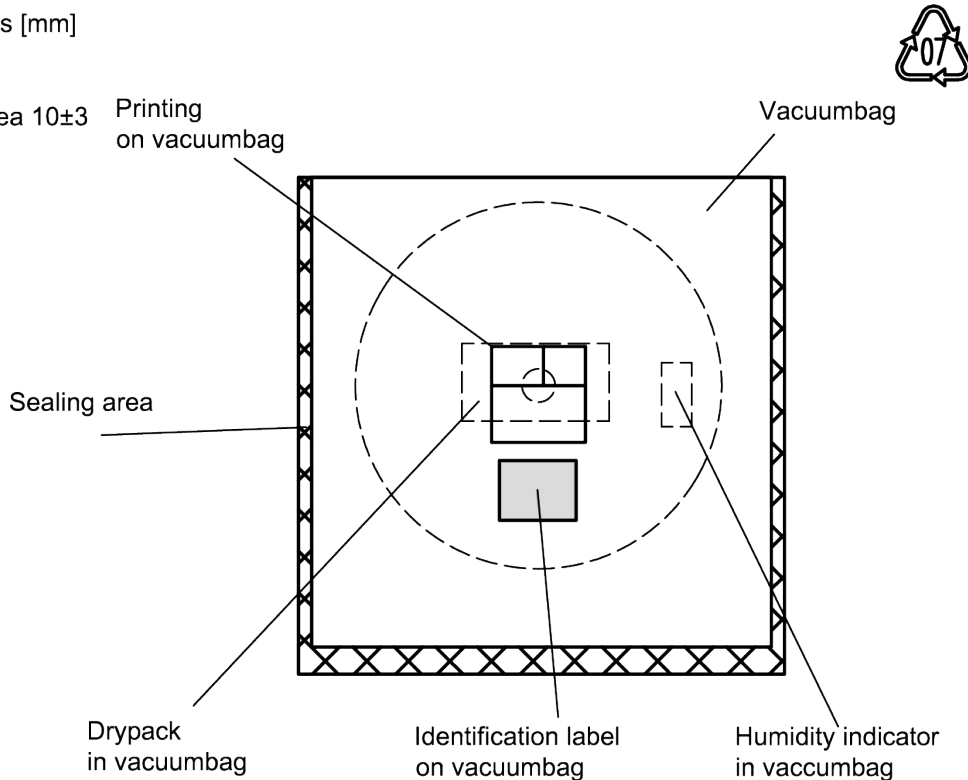


Figure 11: Drawing of moisture barrier bag (MBB) for reel with diameter of 180 mm.

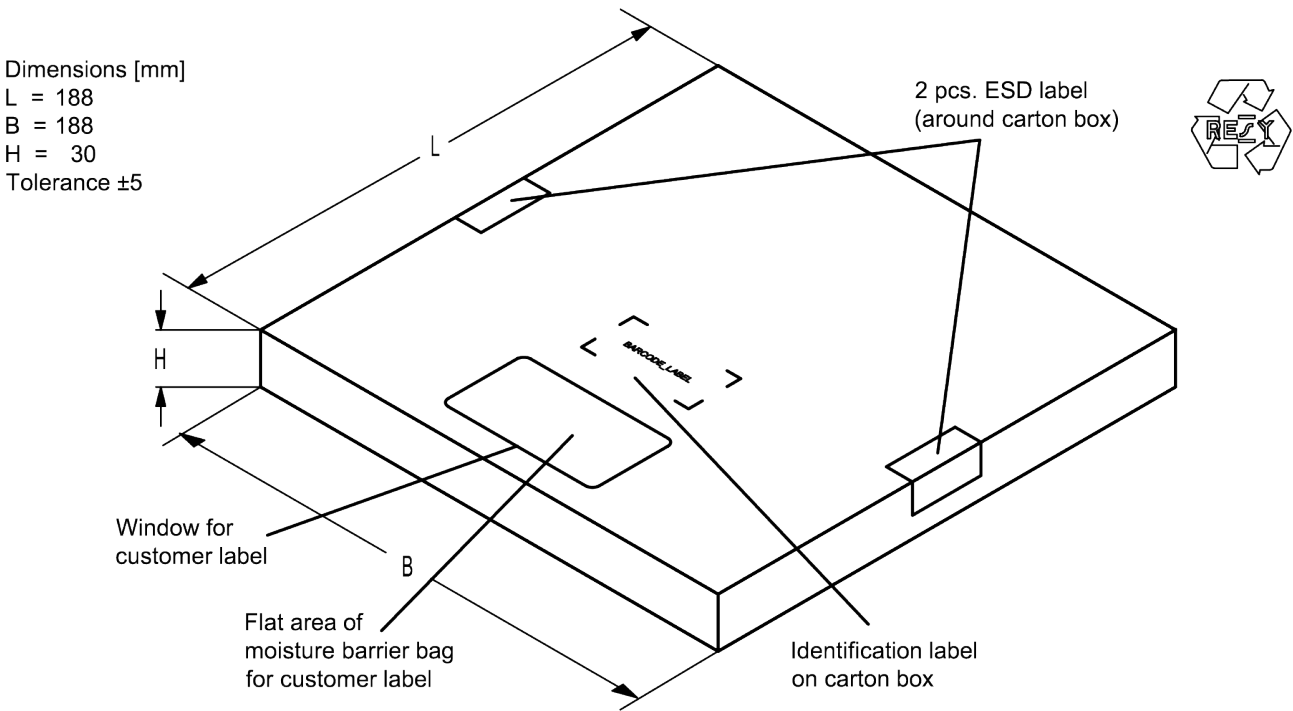


Figure 12: Drawing of folding box for reel with diameter of 180 mm.

### 10.3 Reel with diameter of 330 mm

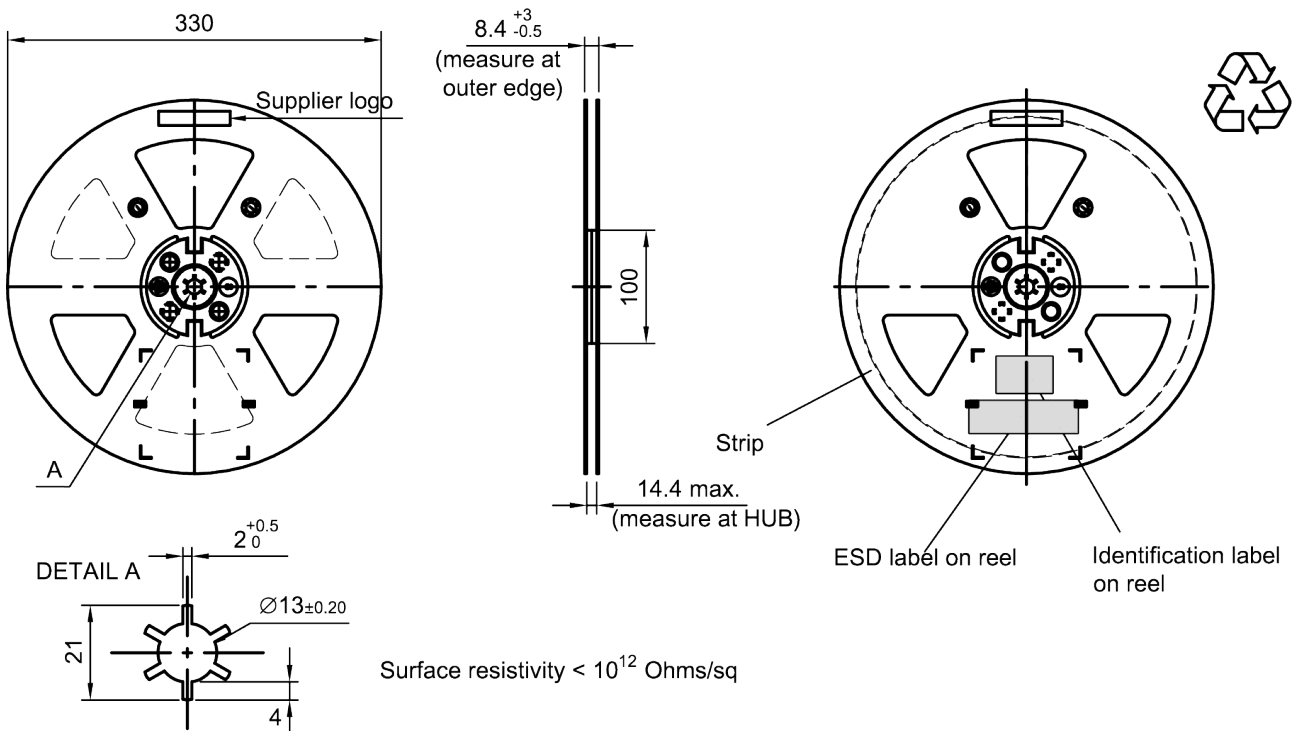



Figure 13: Drawing of reel (first-angle projection) with diameter of 330 mm.

Dimensions [mm]

X = 400+5

Y = 418+5

Sealing area 10±3

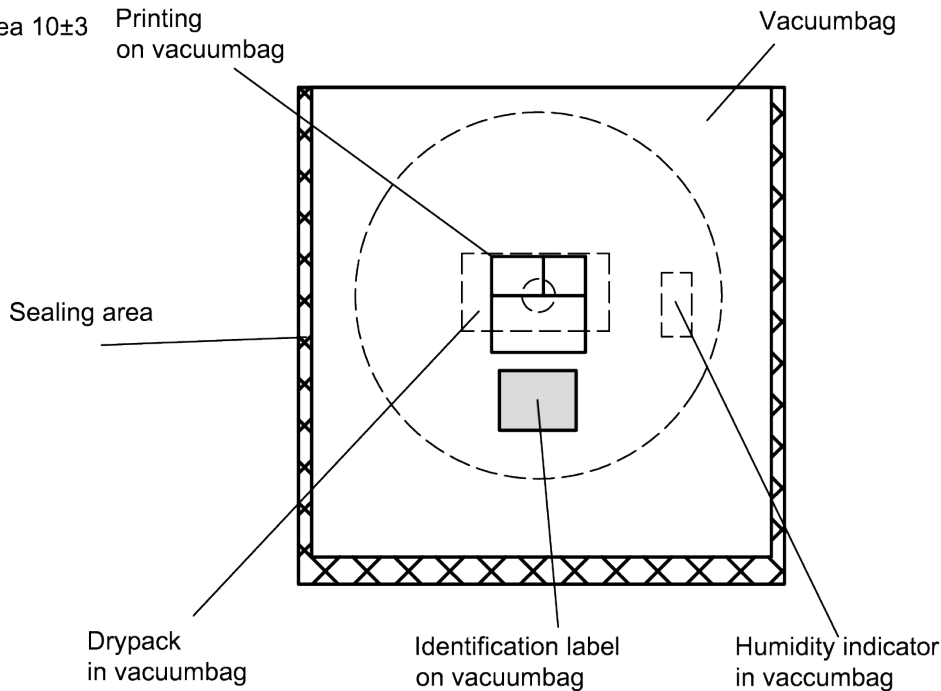

**Figure 14:** Drawing of moisture barrier bag (MBB) for reel with diameter of 330 mm.

Dimensions [mm]

L = 335


B = 338

H = 36 ( for 8 mm tape width)

40 ( for 12 mm tape width)

Tolerance ±5

2 pcs. ESD label  
(around carton box)

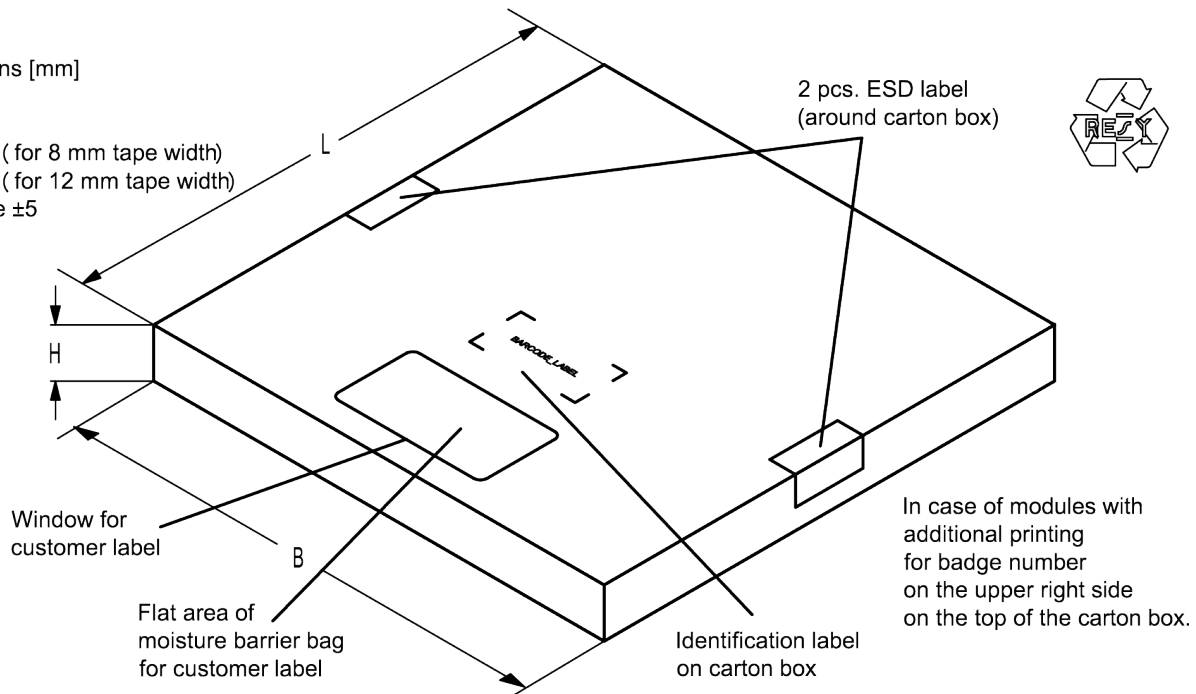

**Figure 15:** Drawing of folding box for reel with diameter of 330 mm.

**11 Marking**

Products are marked with product type number and lot number encoded according to Table 2:

■ Type number:

The 4 digit type number of the ordering code, e.g., B3xxxxB**1234**xxxx, is encoded by a special BASE32 code into a 3 digit marking.

Example of decoding type number marking on device in decimal code.  
**16J** => **1234**  
 $1 \times 32^2 + 6 \times 32^1 + 18 (=J) \times 32^0 =$  **1234**  
 The BASE32 code for product type B1282 is 182.

■ Lot number:

The last 5 digits of the lot number, e.g., **12345**, are encoded based on a special BASE47 code into a 3 digit marking.

Example of decoding lot number marking on device in decimal code.  
**5UY** => **12345**  
 $5 \times 47^2 + 27 (=U) \times 47^1 + 31 (=Y) \times 47^0 =$  **12345**

Adopted BASE32 code for type number			
Decimal value	Base32 code	Decimal value	Base32 code
0	0	16	G
1	1	17	H
2	2	18	J
3	3	19	K
4	4	20	M
5	5	21	N
6	6	22	P
7	7	23	Q
8	8	24	R
9	9	25	S
10	A	26	T
11	B	27	V
12	C	28	W
13	D	29	X
14	E	30	Y
15	F	31	Z

Adopted BASE47 code for lot number			
Decimal value	Base47 code	Decimal value	Base47 code
0	0	24	R
1	1	25	S
2	2	26	T
3	3	27	U
4	4	28	V
5	5	29	W
6	6	30	X
7	7	31	Y
8	8	32	Z
9	9	33	b
10	A	34	d
11	B	35	f
12	C	36	h
13	D	37	n
14	E	38	r
15	F	39	t
16	G	40	v
17	H	41	\
18	J	42	?
19	K	43	{
20	L	44	}
21	M	45	<
22	N	46	>
23	P		


**Table 2:** Lists for encoding and decoding of marking.

## 12 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58 – 3<sup>rd</sup> edit and IPC/JEDEC J-STD-020B.

ramp rate	≤ 3 K/s
preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
$T > 220\text{ °C}$	30 s to 70 s
$T > 230\text{ °C}$	min. 10 s
$T > 245\text{ °C}$	max. 20 s
$T \geq 255\text{ °C}$	–
peak temperature $T_{\text{peak}}$	250 °C +0/-5 °C
wetting temperature $T_{\text{min}}$	230 °C +5/-0 °C for 10 s ± 1 s
cooling rate	≤ 3 K/s
soldering temperature $T$	measured at solder pads

**Table 3:** Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

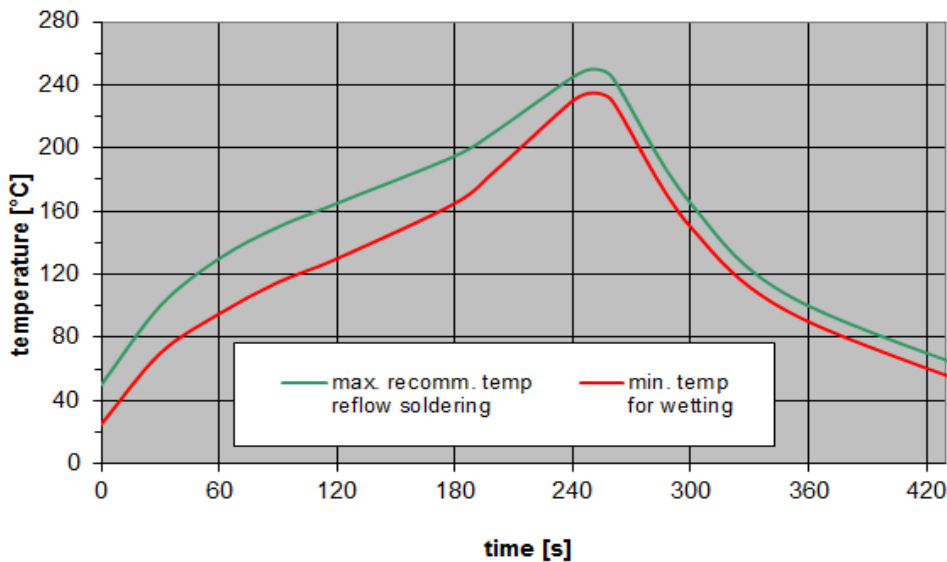

**Figure 16:** Recommended reflow profile for convection and infrared soldering – lead-free solder.

**13 Annotations**

**13.1 RoHS compatibility**

ROHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

**13.2 Scattering parameters (S-parameters)**

The pin/port assignment is available in the headers of the S-parameter files. Please contact your local RF360 sales office.

**13.3 Ordering codes / product IDs and packing units**

Ordering code / product ID	RF360 label	Packing unit
B39272B1282L210	B39272-B1282-L210-S05	5000 pcs
	B39272-B1282-L210-W05	5000 pcs

**Table 4:** Ordering codes / product IDs and packing units. Shipment will come from either Singapore or Wuxi location.

## 14 Cautions and warnings

### 14.1 Display of ordering codes for RF360 products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of RF360, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under <https://rffe.qualcomm.com/>.

### 14.2 Material information

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

For information on recycling of tapes and reels please contact one of our sales offices.

### 14.3 Moldability

Before using in overmolding environment, please contact your local RF360 sales office.

### 14.4 Package information

#### Landing area

The printed circuit board (PCB) land pattern (landing area) shown is based on RF360 internal development and empirical data and illustrated for example purposes, only. As customers' SMD assembly processes may have a plenty of variants and influence factors which are not under control or knowledge of RF360, additional careful process development on customer side is necessary and strongly recommended in order to achieve best soldering results tailored to the particular customer needs.

#### Dimensions

Unless otherwise specified all dimensions are understood using unit millimeter (mm).

#### Projection method

Unless otherwise specified first-angle projection is applied.

## 15 Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, RF360 Europe GmbH and its affiliates are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an RF360 product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (<https://rfe.qualcomm.com>). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.



单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)