



SAW Components

SAW Duplexer

LTE / E-UTRA Band 3

Series/type:	B8656
Ordering code:	B39182B8656P810
Date:	November 11, 2014
Version:	2.0

© EPCOS AG 2014. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.


Datasheet

Application

- Low-loss SAW duplexer for mobile telephone LTE / E-UTRA Band 3 systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 75 MHz
- Single ended to balanced transformation in Antenna - Rx path
- Impedance transformation 50Ω to 100Ω in Antenna - Rx path
- high Tx - Rx isolation
- optimized for envelope tracking


Features

- Package size 1.8 x 1.4 mm²
- Package height 0.475mm max.
- RoHS compatible
- Approximate weight 4.2mg
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

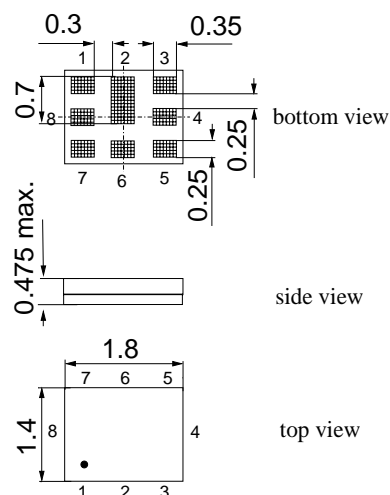
Pin configuration

- 3 Tx input
- 1, 8 Rx output (balanced)
- 6 Antenna
- 2, 4, 5, 7 To be grounded

Please read *cautions and warnings and important notes* at the end of this document.

Datasheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 3.3 nH
RX terminating impedance:	Z _{RX} = 100 Ω (balanced) +1.5 nH 16 nH ⁴⁾
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics TX-ANT ¹⁾		min.	typ. @ 25°C	max.	
Center frequency	f _C	–	1747.5	–	MHz
Maximum insertion attenuation	α _{max}				
1712.5 ... 1782.5 MHz	α _{LTE²⁾3)}	–	2.0	3.0	dB
1712.5 ... 1782.5 MHz	α _{LTE²⁾}	–	2.0	3.5	dB
Amplitude ripple per 5MHz channel	Δα				
1710.24 ... 1784.76 MHz		–	0.6	–	dB
Input VSWR (Tx port)					
1710.24 ... 1784.76 MHz ³⁾		–	1.4	2.0	
1710.24 ... 1784.76 MHz		–	1.4	3.2	
Output VSWR (Ant Port)					
1710.24 ... 1784.76 MHz ³⁾		–	1.5	2.0	
1710.24 ... 1784.76 MHz		–	1.5	2.2	
Attenuation	α				
10.0 ... 1565.42 MHz		36	39	–	dB
703.0 ... 748.0 MHz		40	46	–	dB
716.0 ... 756.0 MHz		40	46	–	dB
814.0 ... 849.0 MHz		39	44	–	dB
824.0 ... 849.0 MHz		39	44	–	dB
830.0 ... 845.0 MHz		39	44	–	dB
832.0 ... 862.0 MHz		39	43	–	dB
880.0 ... 915.0 MHz		38	42	–	dB
925.0 ... 960.0 MHz		38	42	–	dB
1226.0 ... 1250.0 MHz		36	39	–	dB
1496.0 ... 1511.0 MHz		40	47	–	dB
1559.0 ... 1563.0 MHz		38	46	–	dB
1565.42 ... 1573.374MHz		37	44	–	dB
1573.374... 1577.466MHz		36	43	–	dB
1577.466... 1585.42 MHz		35	42	–	dB
1597.5515...1605.886MHz		33	39	–	dB
1605.886... 1680.0 MHz		20	34	–	dB
1805.24 ... 1879.76 MHz ³⁾		44	55	–	dB
1805.24 ... 1879.76 MHz		40	55	–	dB
1807.5 ... 1877.5 MHz α _{LTE²⁾}		44	55	–	dB

Please read *cautions and warnings and important notes* at the end of this document.



Characteristics TX-ANT ¹⁾				min.	typ. @ 25°C	max.	
1920.0	...	1980.0	MHz	24	32	–	dB
2110.0	...	2170.0	MHz	24	33	–	dB
2400.0	...	2500.0	MHz	26	30	–	dB
2440.0	...	2494.0	MHz	26	30	–	dB
2500.0	...	2570.0	MHz	25	30	–	dB
2620.0	...	2690.0	MHz	24	29	–	dB
3420.0	...	3570.0	MHz	21	24	–	dB
4900.0	...	5950.0	MHz	12	22	–	dB
5100.0	...	5385.0	MHz	12	25	–	dB
5130.0	...	5355.0	MHz	12	25	–	dB
6840.0	...	7140.0	MHz	–	23	–	dB
8550.0	...	8925.0	MHz	–	24	–	dB
10260.0	...	10710.0	MHz	–	27	–	dB
11970.0	...	12495.0	MHz	–	35	–	dB

¹⁾ Specified values are valid for a testing power of +10dBm

²⁾ Averaged value of linear s-parameter over 5 MHz

³⁾ Valid in the temperature range from 0°C to 85°C

⁴⁾ Alternative matching 140 Ω (balanced) ||10 nH

Datasheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 3.3 nH
RX terminating impedance:	Z _{RX} = 100 Ω (balanced) +1.5 nH 16 nH ⁴⁾
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics ANT-RX ¹⁾		min.	typ. @ 25°C	max.	
Center frequency	f _C	–	1842.5	–	MHz
Maximum insertion attenuation	α _{max}				
1807.5 ... 1877.5 MHz	α _{LTE²⁾³⁾}	–	2.8	3.5	dB
1807.5 ... 1877.5 MHz	α _{LTE²⁾}	–	2.8	3.8	dB
Amplitude ripple per 5MHz channel	Δα				
1805.24 ... 1879.76 MHz		–	0.7	–	dB
Common mode rejection ratio					
1805.24 ... 1879.76 MHz		18	23	–	dB
Input VSWR (Ant port)					
1805.24 ... 1879.76 MHz		–	1.7	2.0	
Output VSWR (Rx Port)					
1805.24 ... 1879.76 MHz		–	1.6	2.0	
Attenuation	α				
10.0 ... 1710.0 MHz		40	50	–	dB
95.0 MHz		50	70	–	dB
718.0 ... 748.0 MHz		40	70	–	dB
814.0 ... 849.0 MHz		40	70	–	dB
832.0 ... 862.0 MHz		40	70	–	dB
880.0 ... 915.0 MHz		40	68	–	dB
1447.0 ... 1463.0 MHz		40	52	–	dB
1615.0 ... 1690.0 MHz		40	50	–	dB
1710.24 ... 1784.76 MHz		45	53	–	dB
1712.5 ... 1782.5 MHz	α _{LTE²⁾}	45	53	–	dB
1785.0 ... 1790.0 MHz		10	55	–	dB
1920.0 ... 2000.0 MHz		32	46	–	dB
2000.0 ... 2400.0 MHz		38	44	–	dB
2400.0 ... 2500.0 MHz		40	50	–	dB
2500.0 ... 2570.0 MHz		40	49	–	dB
2570.0 ... 3515.0 MHz		40	45	–	dB
3515.0 ... 3760.0 MHz		40	46	–	dB
3760.0 ... 6000.0 MHz		36	44	–	dB

Please read *cautions and warnings and important notes* at the end of this document.



Characteristics ANT-RX ¹⁾	min.	typ. @ 25°C	max.	
4900.0 ... 5950.0 MHz	36	44	–	dB
5205.0 ... 5660.0 MHz	36	45	–	dB
6000.0 ... 13025.0 MHz	–	39	–	dB
7220.0 ... 7520.0 MHz	–	47	–	dB
9025.0 ... 9400.0 MHz	–	39	–	dB
10830.0 ... 11280.0 MHz	–	43	–	dB
12635.0 ... 13160.0 MHz	–	47	–	dB

¹⁾ Specified values are valid for a testing power of +10dBm

²⁾ Averaged value of linear s-parameter over 5 MHz

³⁾ Valid in the temperature range from 0°C to 85°C

⁴⁾ Alternative matching 140 Ω (balanced) ||10 nH

Datasheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 3.3 nH
RX terminating impedance:	Z _{RX} = 100 Ω (balanced) +1.5 nH 16 nH ³⁾
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics TX-RX ¹⁾				min.	typ. @ 25°C	max.	
Isolation	1712.5 ... 1782.5 MHz	α	$\alpha_{\text{LTE}}^{2)}$	54	59	-	dB
	1807.5 ... 1877.5 MHz		$\alpha_{\text{LTE}}^{2)}$	53	60	-	dB

1) Specified values are valid for a testing power of +10dBm

2) Averaged value of linear s-parameter over 5 MHz

3) Alternative matching 140 Ω (balanced) ||10 nH

Maximum ratings



Storage temperature range	T _{stg}	-40/+90	°C	
DC voltage	V _{DC}	0 ¹⁾	V	
ESD voltage	V _{ESD}	50 ²⁾	V	machine model, 10 pulses
Input Power	P _{IN}	29	dBm	5 MHz LTE uplink @ 50°C, 5000h

1) DC resistance at RX output might be less than 100 MΩ at elevated temperatures. Hence, we recommend usage of blocking capacitors.

2) Acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



Frequency response TX - ANT

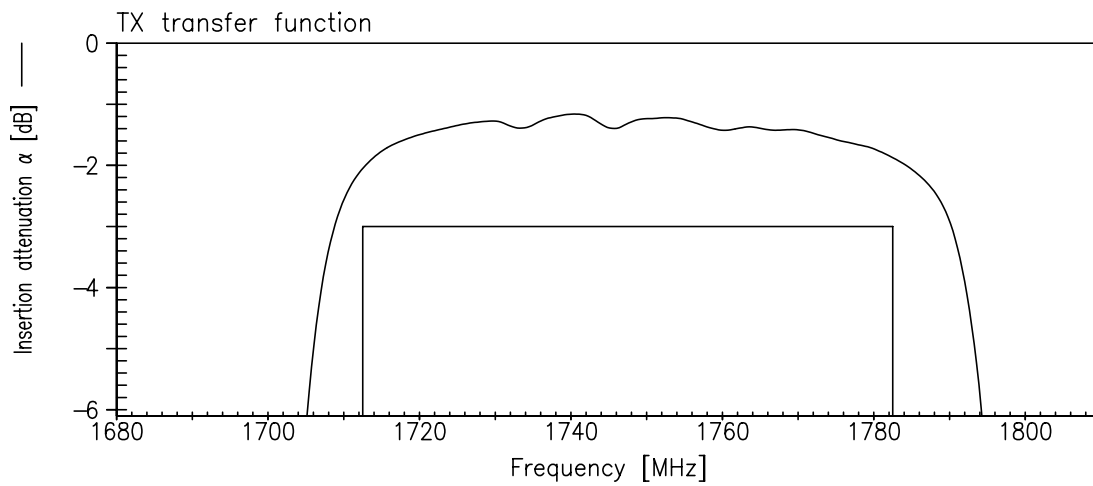
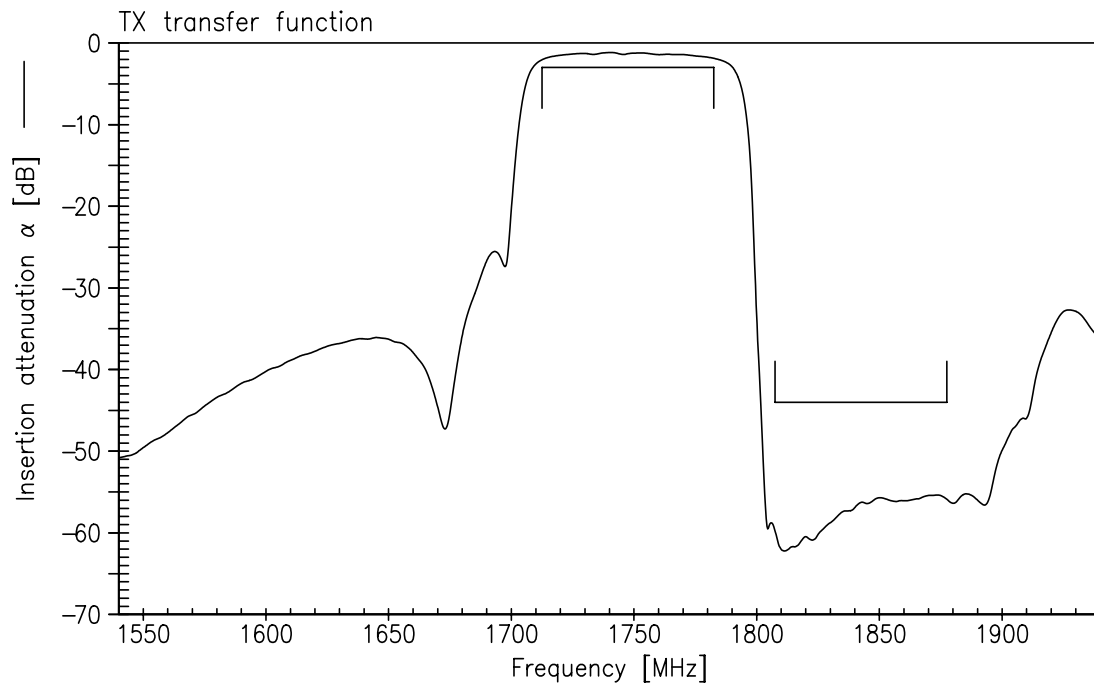


Please read *cautions and warnings and important notes* at the end of this document.

Datasheet





Frequency response ANT - RX

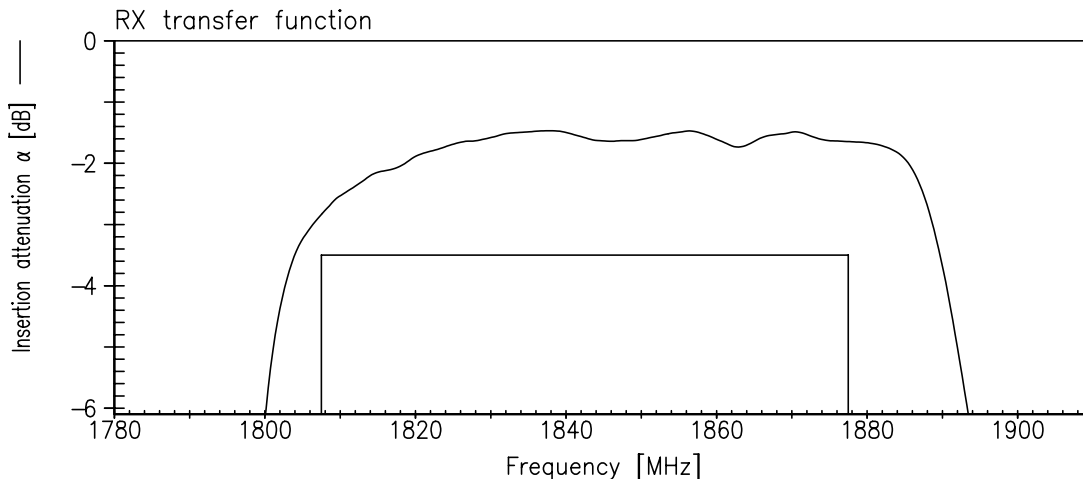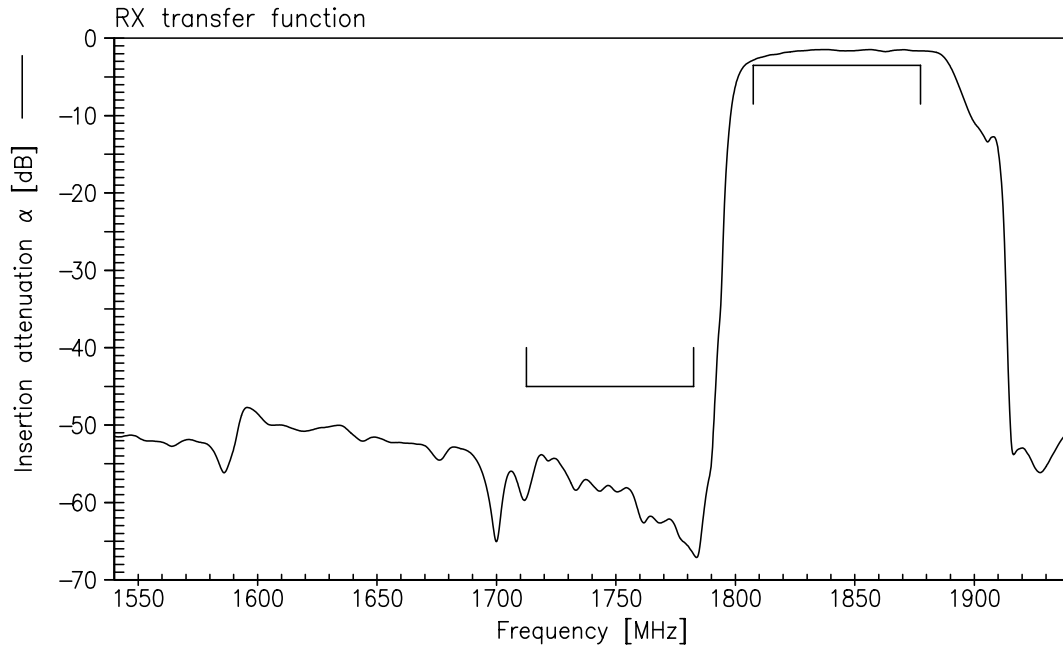

Please read *cautions and warnings and important notes* at the end of this document.



Wide band frequency response TX - ANT and ANT - RX

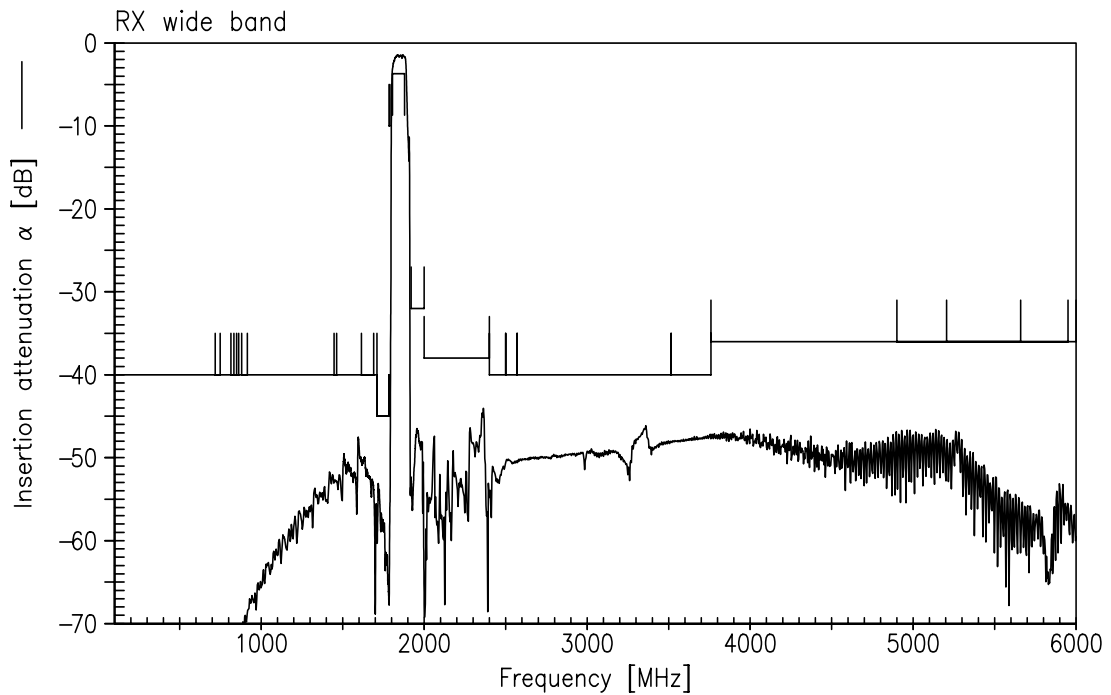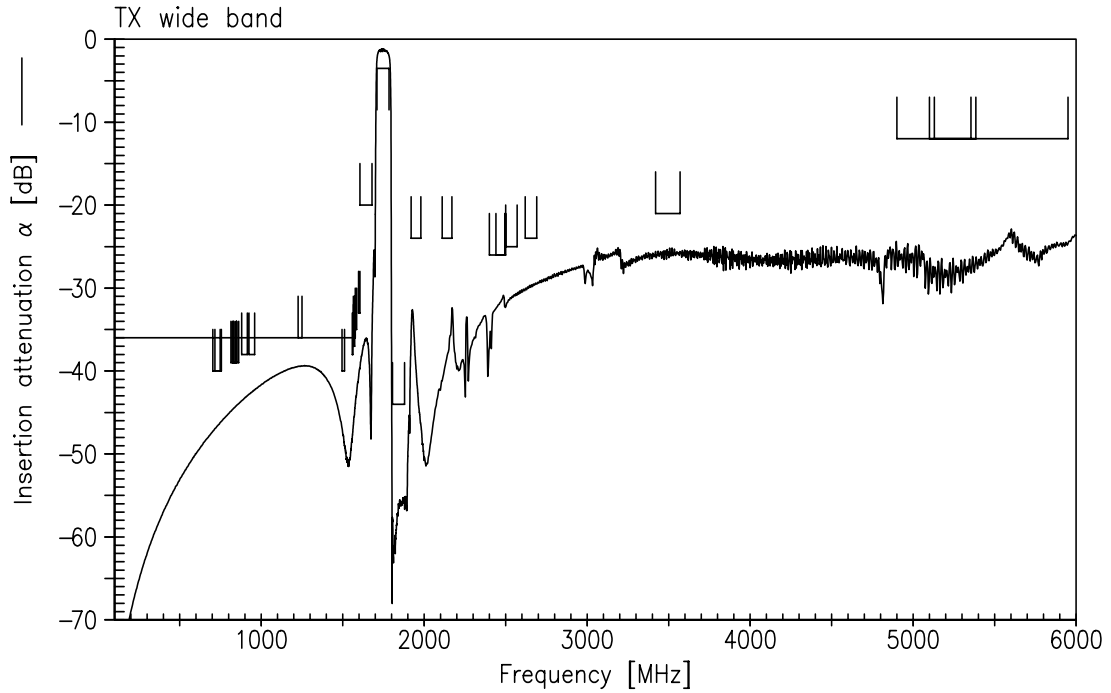


Please read *cautions and warnings* and *important notes* at the end of this document.


Datasheet



Frequency Response TX - RX

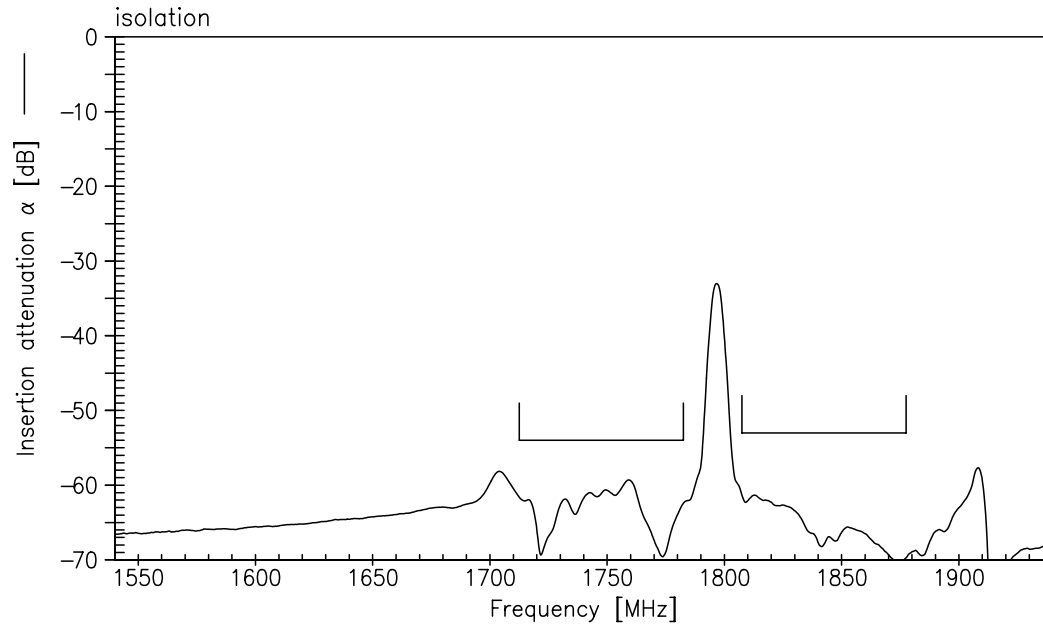

RX Common mode rejection ratio

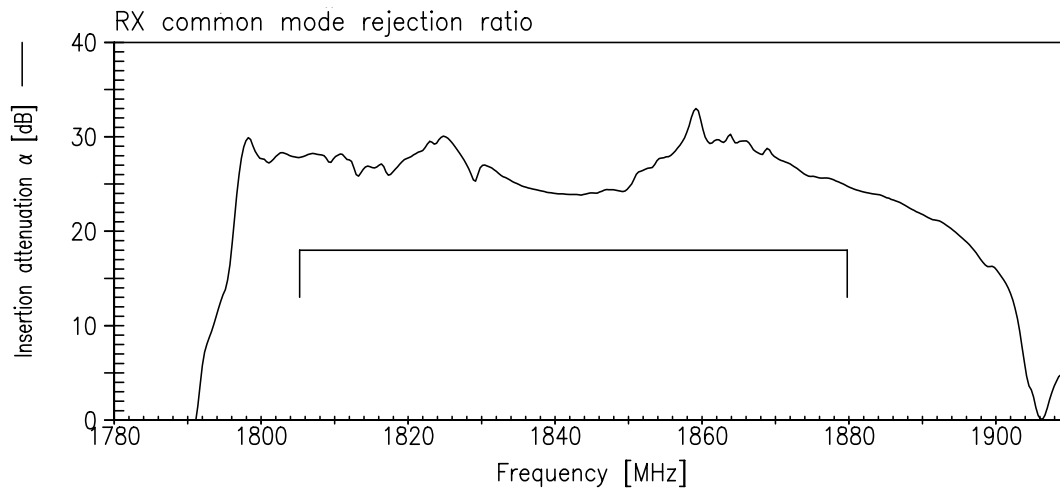


Please read *cautions and warnings and important notes* at the end of this document.



Datasheet





VSWR of TX-port, RX-port and ANT-port

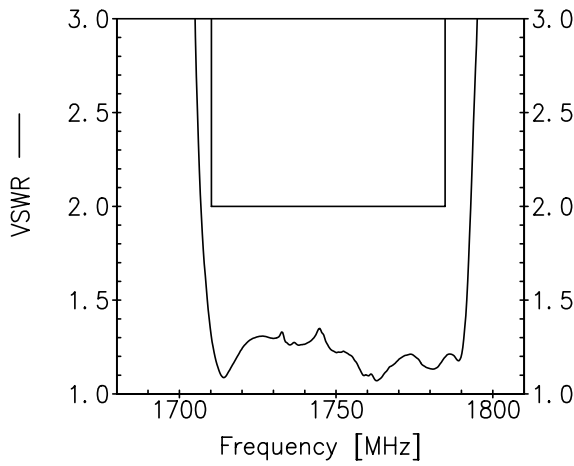


TX port matching

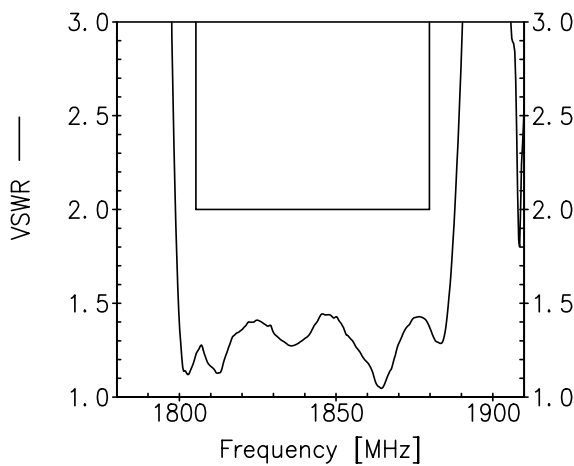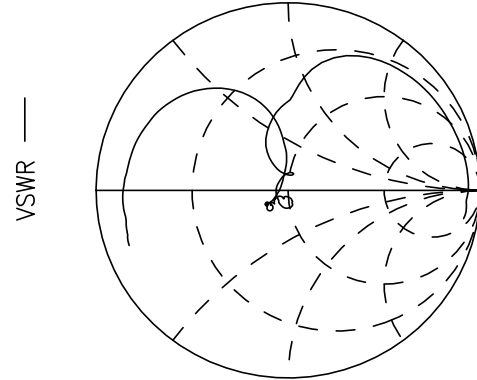

RX port matching

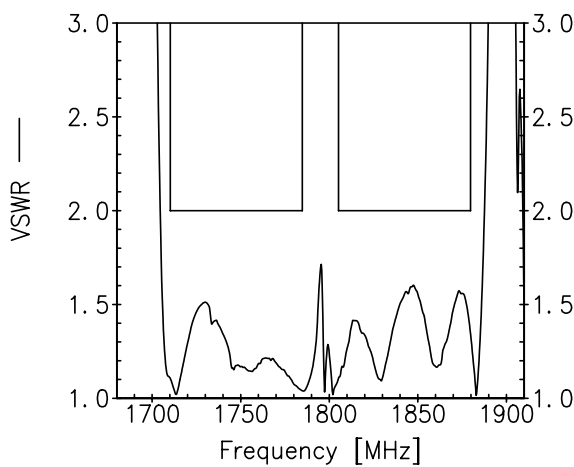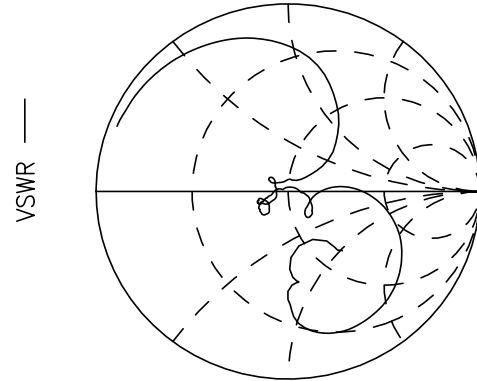

ANT port matching

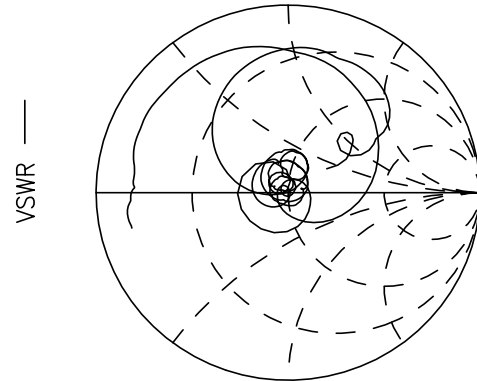

Please read *cautions and warnings* and *important notes* at the end of this document.

SAW Components	B8656
SAW Duplexer	1747.5 / 1842.5 MHz
Datasheet	

References

Type	B8656
Ordering code	B39182B8656P810
Marking and Package	C61157-A8-A92
Packaging	F61074-V8259-Z000
Date Codes	L_1126
S-Parameters	B8656_NB_UN.s4p (narrow band, unmatched), B8656_WB_UN.s4 (wide band, unmatched), B8656_HD_WB_UN.s4p (HD wide band, unmatched) See file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

13 November 11, 2014

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)