



# SAW Components

## BAW/SAW Duplexer

WCDMA Band II (PCS)

<b>Series/type:</b>	<b>B8078</b>
<b>Ordering code:</b>	<b>B39202B8078P810</b>
Date:	December 14, 2011
Version:	1.0



<b>SAW Components</b>	<b>B8078</b>
<b>BAW/SAW Duplexer</b>	<b>1880.0 / 1960.0 MHz</b>

Preliminary Data



**Revision History**

Changes compared to previously issued iteration

<b>Issue</b>	<b>Originator</b>	<b>Detailed specification changes</b>	<b>Date</b>
B8078 1.0	J. Konopka	Final specification values	Dec. 14, 2011

Preliminary Data




**Application**

- Low-loss BAW/SAW duplexer for mobile telephone WCDMA Band II (PCS) systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 60 MHz
- Single ended to balanced transformation in Antenna - Rx path
- Impedance transformation 50Ω to 100Ω in Antenna - Rx path




**Features**

- Package size 2.0 x 1.6 mm<sup>2</sup>, max. height 0.45 mm
- RoHS compatible
- Approx. weight 0.0056g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- Fully matched by integrated matching network
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

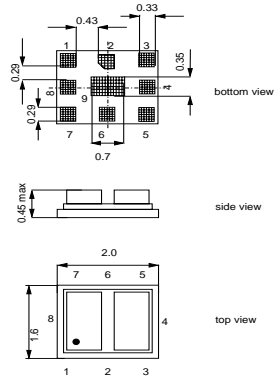

**Pin configuration**

- 3 TX Input
- 1, 8 RX Output (balanced)
- 6 Antenna
- 4, 5, 9 To be grounded
- 2, 7 To be grounded

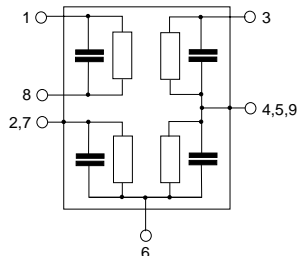

**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    10nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

<b>Characteristics TX - ANT</b>		<b>min.</b>	<b>typ. @ 25°C</b>	<b>max.</b>	
<b>Center frequency</b>	f <sub>C</sub>	—	1880.0	—	MHz
<b>Maximum insertion attenuation</b>					
@f <sub>Carrier</sub> 1852.4 ... 1907.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>	—	2.0	3.0	dB
@f <sub>Carrier</sub> 1852.4 ... 1907.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>	—	2.0	2.5 <sup>3)</sup>	dB
<b>Error Vector Magnitude</b>					
@f <sub>Carrier</sub> 1852.4 ... 1907.6 MHz	EVM <sup>2)</sup>	—	1.0	3.0	%
@f <sub>Carrier</sub> 1852.4 ... 1907.6 MHz	EVM <sup>2)</sup>	—	1.0	2.0 <sup>3)</sup>	%
<b>Input VSWR (TX port)</b>					
1850.0 ... 1910.0 MHz		—	1.5	2.0	
<b>Output VSWR (ANT port)</b>					
1850.0 ... 1910.0 MHz		—	1.5	2.0	
<b>Attenuation</b>	α				
10.0 ... 728.0 MHz		30	33	—	dB
728.0 ... 764.0 MHz		30	33	—	dB
869.0 ... 894.0 MHz		30	34	—	dB
1574.0 ... 1577.0 MHz		36	42	—	dB
1577.0 ... 1680.0 MHz		30	42	—	dB
@f <sub>Carrier</sub> 1932.4 ... 1987.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>	45	50	—	dB
2110.0 ... 2155.0 MHz		35	44	—	dB
2400.0 ... 2500.0 MHz		25	30	—	dB
3690.0 ... 3830.0 MHz		20	25	—	dB
5150.0 ... 5350.0 MHz		16	23	—	dB
5540.0 ... 5860.0 MHz		16	22	—	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (7).

<sup>2)</sup> Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

<sup>3)</sup> Valid only for room temperature 25 °C

**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    10nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics ANT-RX		min.	typ. @ 25°C	max.	
<b>Center frequency</b>	f <sub>C</sub>	—	1960.0	—	MHz
<b>Maximum insertion attenuation</b>					
@f <sub>Carrier</sub>	1932.4 ... 1987.6MHz α <sub>WCDMA</sub> <sup>1)</sup>	—	3.0	3.7	dB
@f <sub>Carrier</sub>	1932.4 ... 1987.6MHz α <sub>WCDMA</sub> <sup>1)</sup>	—	3.0	3.5 <sup>2)</sup>	dB
<b>Error Vector Magnitude</b>					
@f <sub>Carrier</sub>	1932.4 ... 1987.6MHz EVM <sup>3)</sup>	—	1.8	6.0	%
@f <sub>Carrier</sub>	1932.4 ... 1987.6MHz EVM <sup>3)</sup>	—	1.8	3.5 <sup>2)</sup>	%
@f <sub>Carrier</sub>	1932.4 ... 1987.6MHz EVM <sup>3)</sup>	—	1.8	2.8 <sup>4)</sup>	%
<b>Input VSWR (ANT port)</b>					
	1930.0 ... 1990.0MHz	—	1.8	2.6	
<b>Output VSWR (RX port)</b>					
	1930.0 ... 1990.0MHz	—	1.8	2.4	
<b>Attenuation</b>					
	1.0 ... 1765.0MHz α	30	46	—	dB
	1835.0 ... 1850.0MHz	30	58	—	dB
@f <sub>Carrier</sub>	1852.4 ... 1907.6MHz α <sub>WCDMA</sub> <sup>1)</sup>	45	56	—	dB
	2025.0 ... 2050.0MHz	10	28	—	dB
	2050.0 ... 2075.0MHz	25	36	—	dB
	2400.0 ... 2484.0MHz	30	54	—	dB
	2810.0 ... 2910.0MHz	30	58	—	dB
	3775.0 ... 3905.0MHz	30	60	—	dB
	5625.0 ... 5815.0MHz	30	61	—	dB
	2075.0 ... 6000.0MHz	30	37	—	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (7).

<sup>2)</sup> Valid only for reduced temperature range from 0 °C to 85 °C.

<sup>3)</sup> Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

<sup>4)</sup> Valid only for room temperature 25 °C

**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    10nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

<b>Characteristics ANT - RX</b>	<b>min.</b>	<b>typ. @ 25 °C</b>	<b>max.</b>	
<b>Common mode suppression</b> 1930.0 ... 1990.0 MHz	23	28	—	dB
<i>S<sub>CS21</sub></i>				
<b>IMD Product Level Limits<sup>1)</sup></b> <b>at f<sub>TX</sub>=1880MHz, f<sub>RX</sub>=1960MHz</b>				
Blocker 1                      80.0 MHz				
Blocker 2                      1800.0 MHz	—	-98	—	dBm
Blocker 3                      3840.0 MHz	—	-107	—	dBm
	—	-102	—	dBm

<sup>1)</sup> IMD product level limits for power levels P<sub>TX</sub>=21.5dBm (antenna port output power) and P<sub>Blocker</sub>=-15dBm (antenna port input power)

<b>Characteristics TX - RX</b>	<b>min.</b>	<b>typ. @ 25 °C</b>	<b>max.</b>	
<b>Isolation</b>	50	58	—	dB
$\alpha$				
@f <sub>Carrier</sub> 1852.4 ... 1907.6 MHz				
$\alpha_{\text{WCDMA}}^{1)}$				
@f <sub>Carrier</sub> 1932.4 ... 1987.6 MHz	46	51	—	dB
$\alpha_{\text{WCDMA}}^{1)}$				

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (7).


**Maximum ratings**

Operable temperature range <sup>1)</sup>	T	-30/+85	°C	machine model, 10 pulses source and load impedance 50 Ω } continuous wave } T = 55°C, 50.000 h
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5.5	V	
ESD voltage	V <sub>ESD</sub>	50 <sup>2)</sup>	V	
Input power at 1850.0 ... 1910.0 MHz	P <sub>IN</sub>	29	dBm	
elsewhere		10	dBm	

1) Defines the temperature range in which the BAW / SAW device keeps its typical characteristics, however the specification values are not guaranteed.

2) acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.

**Annotation for characteristics section**

Attenuation of WCDMA signal ("Powertransferfunction",  $\alpha_{\text{WCDMA}}$ ) is determined by

$$\int_{-\infty}^{\infty} |S_{ds21}(f) H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$


$f_{\text{Carrier}}$  according to 3GPP TS 25.101 (e.g. for WCDMA Band 2 Passband,  $f_{\text{Carrier}}$  ranges from 1852.4 MHz (lowest Tx channel) to 1907.6 MHz (highest Tx channel)).  $H_{\text{RRC}}(f)$  is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$


Preliminary Data



**Frequency Response TX-ANT (PTF)**

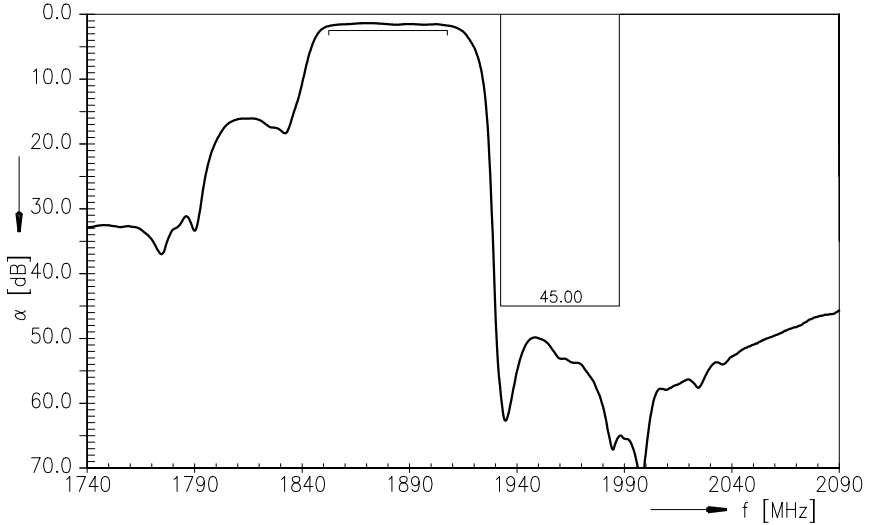

**Frequency Response TX-ANT (wideband)**

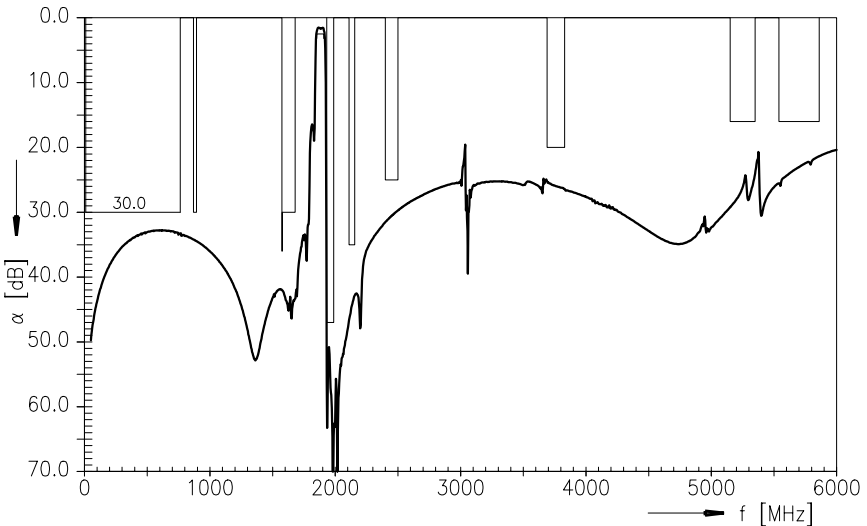





Preliminary Data



**Frequency Response ANT-RX (PTF)**

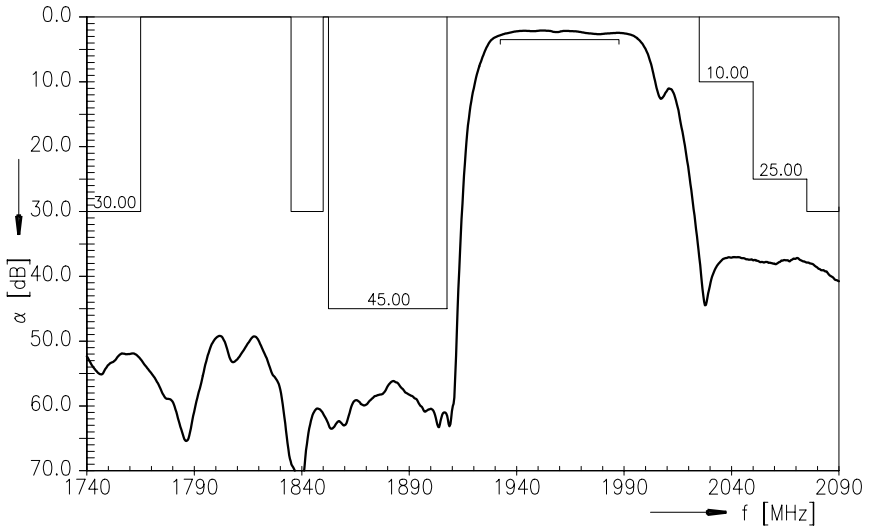


**Frequency Response ANT-RX (wideband)**

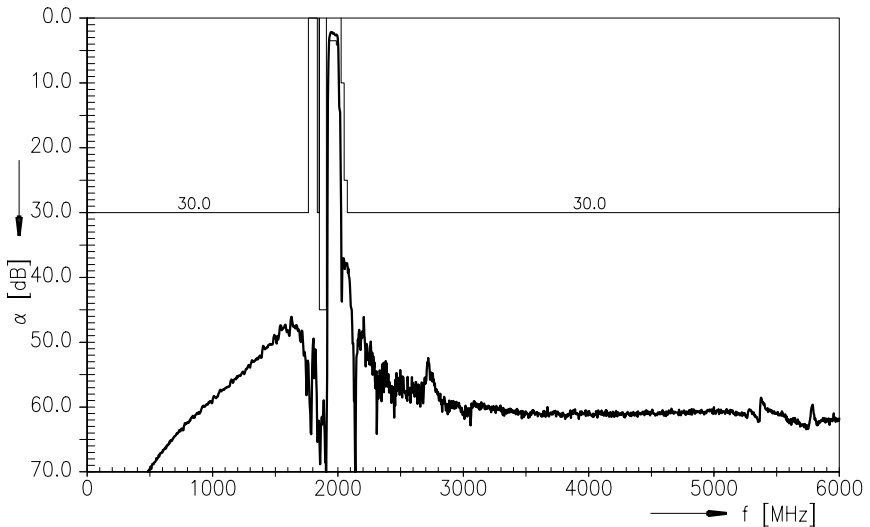


Preliminary Data



**Frequency Response TX-RX (PTF)**

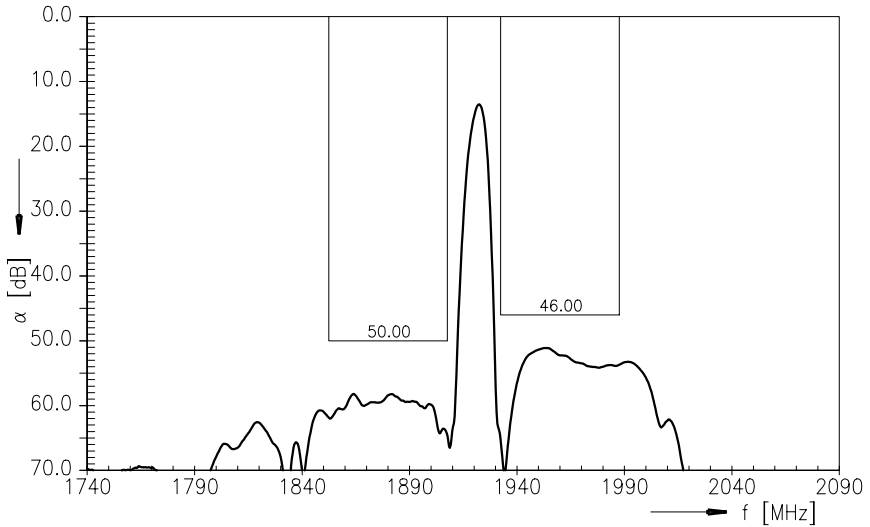

**Frequency Response RX-ANT Common Mode Suppression**

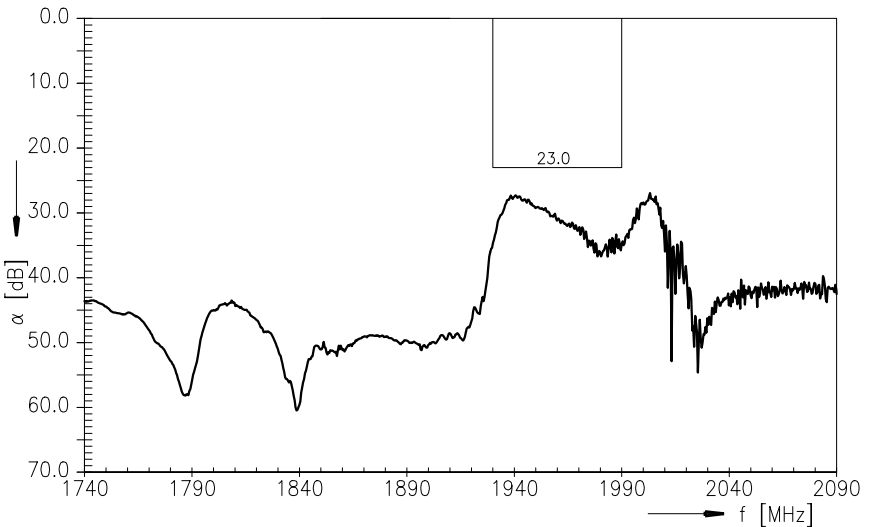



<b>SAW Components</b>	<b>B8078</b>
<b>BAW/SAW Duplexer</b>	<b>1880.0 / 1960.0 MHz</b>

Preliminary Data



<b>Type</b>	B8078
<b>Ordering code</b>	
<b>Marking and package</b>	
<b>Packaging</b>	
<b>Date codes</b>	L_1126
<b>S-parameters</b>	LS33B_NB_UN.s4p (unmatched, nearby) LS33B_WB_UN.s4p (unmatched, wideband) see file header for port/pin assignment table
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com) .

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2011. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)