



SAW Components

SAW Duplexer

WCDMA Band 4/ CDMA 1x AWS Band

| | |
|-----------------------|------------------------|
| Series/type: | B8563 |
| Ordering Code: | B39212B8563P810 |
| Date: | January 27, 2012 |
| Version: | 2.0 |


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data sheet


Application

- Low-loss SAW duplexer for mobile telephone WCDMA Band 4 / CDMA 1x AWS systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 45 MHz
- Single-ended to balanced transformation in Antenna-Rx path
- Impedance transformation 50Ω to 100Ω in Antenna-Rx path
- High isolation between Tx and Rx

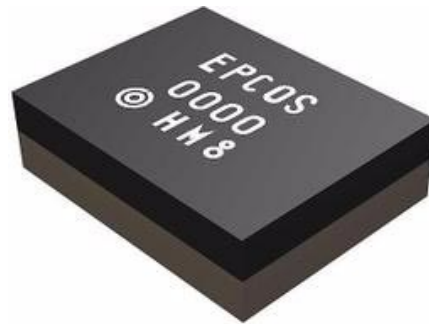
Features

- Package size 2.0 x 1.6 mm², package height 0.47 mm max.
- RoHS compatible
- Approx. weight 0.005 g
- Package for Surface Mount Technology (SMT)
- Ni, Au-plated terminals
- Balanced Rx port, unbalanced Tx port
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 3

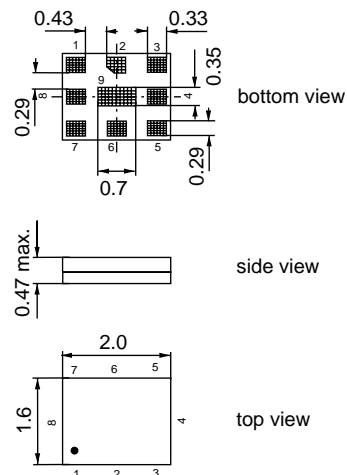
Pin configuration

- 3 Tx input, unbalanced
- 1,8 Rx output, balanced
- 6 Antenna
- 2, 4, 5, 7, 9 To be grounded

 Please read *cautions and warnings and important notes* at the end of this document.

Data sheet

Characteristics for W-CDMA Band 4

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -15 °C to +80 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| Characterisitcs TX - Antenna | | B8563 | | |
|---------------------------------------------|-----------------------------------|-------|-----------------|--------|
| | | min. | typ. @ 25 °C | max. |
| Center frequency | f _C | | 1732.5 | MHz |
| Maximum insertion attenuation | α | | | |
| @f _{Carrier} 1712.4 ... 1752.6 MHz | α _{WCDMA} ¹⁾ | | 1.3 | 1.8 dB |
| Amplitude ripple (p-p) | Δα | | | |
| @f _{Carrier} 1712.4 ... 1752.6 MHz | Δα _{WCDMA} ¹⁾ | | 0.3 | 0.8 dB |
| Error vector magnitude | EVM ²⁾ | | | |
| @f _{Carrier} 1712.4 ... 1752.6 MHz | | | 1.1 | 2.5 % |
| Input VSWR (TX port) | | | | |
| 1710.0 ... 1755.0 MHz | | | 1.4 | 1.9 |
| Output VSWR (ANT port) | | | | |
| 1710.0 ... 1755.0 MHz | | | 1.4 | 1.9 |
| Attenuation | α | | | |
| 1.0 ... 728.0 MHz | | 30 | 45 | dB |
| 728.0 ... 764.0 MHz | | 35 | 45 | dB |
| 851.0 ... 894.0 MHz | | 35 | 43 | dB |
| 1310.0 ... 1355.0 MHz | | 24 | 38 | dB |
| 1565.42 ... 1573.374MHz | | 40 | 50 | dB |
| 1573.374 ... 1577.466MHz | | 45 | 52 | dB |
| 1577.466 ... 1585.42 MHz | | 40 | 52 | dB |
| 1597.5515... 1605.886MHz | | 40 | 45 | dB |
| 1805.0 ... 1880.0 MHz | | 20 | 47 | dB |
| 1930.0 ... 1990.0 MHz | | 40 | 49 | dB |
| @f _{Carrier} 2112.4 ... 2152.6 MHz | α _{WCDMA} ¹⁾ | 42 | 46 | dB |
| 2400.0 ... 2500.0 MHz | | 30 | 38 | dB |
| 2565.0 ... 2677.0 MHz | | 5 | 33 | dB |
| 3410.0 ... 3510.0 MHz | | 25 | 32 | dB |
| 5000.0 ... 5120.0 MHz | | 10 | 21 | dB |
| 5120.0 ... 5350.0 MHz | | 15 | 25 | dB |
| 5350.0 ... 5725.0 MHz | | 10 | 28 | dB |
| 5725.0 ... 5850.0 MHz | | 20 | 28 | dB |
| 5850.0 ... 6000.0 MHz | | 10 | 25 | dB |

¹⁾ Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

²⁾ Error Vector Magnitude (EMV) based on definition given in 3GPP TS 25.141.

Data sheet

Characteristics for W-CDMA Band 4

| | |
|--------------------------------------|---------------------------------------------|
| Temperature range for specification: | T = -15 °C to +80 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH. |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| Characterisitcs Antenna - Rx | | B8563 | | |
|-------------------------------------------------------------------------------|-----------------------------------|------------------|-----------------|--------|
| | | min. | typ. @ 25 °C | max. |
| Center frequency | f _C | | 2132.5 | MHz |
| Maximum insertion attenuation | α | | | |
| @f _{Carrier} 2112.4 ... 2152.6 MHz | α _{WCDMA} ¹⁾ | | 1.8 | 2.2 dB |
| Amplitude ripple (p-p) | Δα | | | |
| @f _{Carrier} 2112.4 ... 2152.6 MHz | Δα _{WCDMA} ¹⁾ | | 0.3 | 0.7 dB |
| Error vector magnitude | EVM ²⁾ | | | |
| @f _{Carrier} 2112.4 ... 2152.6 MHz | | | 1.1 | 2.5 % |
| Input VSWR (RX port) | | | | |
| 2110.0 ... 2155.0 MHz | | | 1.4 | 2.0 |
| Output VSWR (ANT port) | | | | |
| 2110.0 ... 2155.0 MHz | | | 1.7 | 2.0 |
| CMRR (S₃₂-S₄₂ / S₃₂+S₄₂) | | | | |
| 2110.0 ... 2155.0 MHz | | 20 ³⁾ | 26 | dB |

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

2) Error Vector Magnitude (EMV) based on definition given in 3GPP TS 25.141.

3) A combination of 10 ° phase balance and 1 dB amplitude balance corresponds to 19.6 dB CMRR.

Data sheet

Characteristics for W-CDMA Band 4

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -15 °C to +80 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| Characteristics Antenna - Rx | | | | B8563 | | |
|------------------------------|-------------------|-----|------------------------------|-------|-----------------|------|
| | | | | min. | typ. @ 25 °C | max. |
| Attenuation | | | α | | | |
| | 1.0 ... 400.0 | MHz | | 57 | 70 | dB |
| | 400.0 ... 1310.0 | MHz | | 40 | 70 | dB |
| | 1310.0 ... 1355.0 | MHz | | 43 | 68 | dB |
| | 1355.0 ... 1710.0 | MHz | | 35 | 51 | dB |
| @f _{Carrier} | 1712.4 ... 1752.6 | MHz | $\alpha_{\text{WCDMA}}^{1)}$ | 45 | 63 | dB |
| | 1755.0 ... 1910.0 | MHz | | 15 | 52 | dB |
| | 1910.0 ... 1955.0 | MHz | | 35 | 57 | dB |
| | 1955.0 ... 2025.0 | MHz | | 15 | 39 | dB |
| | 2240.0 ... 2300.0 | MHz | | 15 | 38 | dB |
| | 2300.0 ... 2400.0 | MHz | | 30 | 46 | dB |
| | 2400.0 ... 2496.0 | MHz | | 40 | 45 | dB |
| | 2496.0 ... 2690.0 | MHz | | 40 | 54 | dB |
| | 2690.0 ... 3300.0 | MHz | | 35 | 48 | dB |
| | 3300.0 ... 3800.0 | MHz | | 45 | 56 | dB |
| | 3820.0 ... 3910.0 | MHz | | 40 | 56 | dB |
| | 3910.0 ... 4220.0 | MHz | | 35 | 55 | dB |
| | 4220.0 ... 4310.0 | MHz | | 40 | 54 | dB |
| | 4310.0 ... 5150.0 | MHz | | 35 | 50 | dB |
| | 5150.0 ... 5850.0 | MHz | | 40 | 44 | dB |
| | 5850.0 ... 6475.0 | MHz | | 35 | 43 | dB |

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

Data sheet


Characteristics for W-CDMA Band 4

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -15 °C to +80 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| Characterisitcs Tx - Rx | | | | B8563 | | | |
|--------------------------------------|-------------------|-----|----------------------------------|-------|-----------------|------|----|
| | | | | min. | typ. @ 25 °C | max. | |
| Differential Mode Isolation α | | | | | | | |
| | 1574.0 ... 1577.0 | MHz | | 40 | 70 | | dB |
| @f _{Carrier} | 1712.4 ... 1752.6 | MHz | α _{WCDMA} ¹⁾ | 55 | 60 | | dB |
| @f _{Carrier} | 2112.4 ... 2152.6 | MHz | α _{WCDMA} ¹⁾ | 50 | 62 | | dB |
| | 3410.0 ... 3520.0 | MHz | | 20 | 70 | | dB |
| | 5120.0 ... 5275.0 | MHz | | 20 | 59 | | dB |
| Common Mode Isolation α | | | | | | | |
| @f _{Carrier} | 1712.4 ... 1752.6 | MHz | α _{WCDMA} ¹⁾ | 48 | 51 | | dB |

¹⁾ Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

Data sheet


Characteristics for CDMA 1x AWS Band

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -30 °C to +85 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| Characteristics TX - Antenna | | B8563 | | |
|--------------------------------------|----------------|-------|-----------------|--------|
| | | min. | typ. @ 25 °C | max. |
| Center frequency | f _C | | 1732.5 | MHz |
| Maximum insertion attenuation | α | | | |
| 1710.0 ... 1755.0 MHz | | | 1.4 | 2.0 dB |
| Amplitude ripple (p-p) | Δα | | | |
| 1710.0 ... 1755.0 MHz | | | 0.4 | 1.2 dB |
| Input VSWR (TX port) | | | | |
| 1710.0 ... 1755.0 MHz | | | 1.4 | 1.9 |
| Output VSWR (ANT port) | | | | |
| 1710.0 ... 1755.0 MHz | | | 1.4 | 1.9 |
| Attenuation | α | | | |
| 1.0 ... 728.0 MHz | | 30 | 45 | dB |
| 728.0 ... 764.0 MHz | | 35 | 45 | dB |
| 851.0 ... 894.0 MHz | | 35 | 43 | dB |
| 1310.0 ... 1355.0 MHz | | 24 | 38 | dB |
| 1565.42 ... 1573.374MHz | | 40 | 50 | dB |
| 1573.374 ... 1577.466MHz | | 45 | 52 | dB |
| 1577.466 ... 1585.42 MHz | | 40 | 52 | dB |
| 1597.5515... 1605.886MHz | | 40 | 45 | dB |
| 1805.0 ... 1880.0 MHz | | 20 | 47 | dB |
| 1930.0 ... 1990.0 MHz | | 40 | 49 | dB |
| 2110.0 ... 2155.0 MHz | | 42 | 46 | dB |
| 2400.0 ... 2500.0 MHz | | 30 | 38 | dB |
| 2565.0 ... 2677.0 MHz | | 5 | 33 | dB |
| 3410.0 ... 3510.0 MHz | | 25 | 32 | dB |
| 5000.0 ... 5120.0 MHz | | 10 | 21 | dB |
| 5120.0 ... 5350.0 MHz | | 15 | 25 | dB |
| 5350.0 ... 5725.0 MHz | | 10 | 28 | dB |
| 5725.0 ... 5850.0 MHz | | 20 | 28 | dB |
| 5850.0 ... 6000.0 MHz | | 10 | 25 | dB |

 Please read *cautions and warnings and important notes* at the end of this document.

Data sheet


Characteristics for CDMA 1x AWS Band

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -30 °C to +85 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| | | | | B8563 | | | |
|-------------------------------------------------------------------------------|----------------|-------------------|-----|------------------|-----------------|------|-----|
| Characterisitcs Antenna - Rx | | | | min. | typ. @ 25 °C | max. | |
| Center frequency | f _C | | | | 2132.5 | | MHz |
| Maximum insertion attenuation | α | 2110.0 ... 2155.0 | MHz | | 1.8 | 2.3 | dB |
| Amplitude ripple (p-p) | Δα | 2110.0 ... 2155.0 | MHz | | 0.4 | 0.8 | dB |
| Input VSWR (RX port) | | 2110.0 ... 2155.0 | MHz | | 1.4 | 2.0 | |
| Output VSWR (ANT port) | | 2110.0 ... 2155.0 | MHz | | 1.7 | 2.0 | |
| CMRR (S₃₂-S₄₂ / S₃₂+S₄₂) | | 2110.0 ... 2155.0 | MHz | 20 ¹⁾ | 26 | | dB |
| Attenuation | α | | | | | | |
| | | 1.0 ... 400.0 | MHz | 57 | 70 | | dB |
| | | 400.0 ... 1310.0 | MHz | 40 | 70 | | dB |
| | | 1310.0 ... 1355.0 | MHz | 43 | 68 | | dB |
| | | 1355.0 ... 1710.0 | MHz | 35 | 51 | | dB |
| | | 1710.0 ... 1755.0 | MHz | 45 | 63 | | dB |
| | | 1755.0 ... 1910.0 | MHz | 15 | 52 | | dB |
| | | 1910.0 ... 1955.0 | MHz | 35 | 57 | | dB |
| | | 1955.0 ... 2025.0 | MHz | 15 | 39 | | dB |
| | | 2240.0 ... 2300.0 | MHz | 15 | 38 | | dB |
| | | 2300.0 ... 2400.0 | MHz | 30 | 46 | | dB |
| | | 2400.0 ... 2496.0 | MHz | 40 | 45 | | dB |
| | | 2496.0 ... 2690.0 | MHz | 40 | 54 | | dB |
| | | 2690.0 ... 3300.0 | MHz | 35 | 48 | | dB |
| | | 3300.0 ... 3800.0 | MHz | 45 | 56 | | dB |
| | | 3820.0 ... 3910.0 | MHz | 40 | 56 | | dB |
| | | 3910.0 ... 4220.0 | MHz | 35 | 55 | | dB |
| | | 4220.0 ... 4310.0 | MHz | 40 | 54 | | dB |
| | | 4310.0 ... 5150.0 | MHz | 35 | 50 | | dB |
| | | 5150.0 ... 5850.0 | MHz | 40 | 44 | | dB |
| | | 5850.0 ... 6475.0 | MHz | 35 | 43 | | dB |

¹⁾ A combination of 10 ° phase balance and 1 dB amplitude balance corresponds to 19.6 dB CMRR.

Please read *cautions and warnings and important notes* at the end of this document.

8 January 27, 2012

Data sheet


Characteristics for CDMA 1x AWS Band

| | |
|--------------------------------------|--------------------------------------------|
| Temperature range for specification: | T = -30 °C to +85 °C |
| Antenna terminating impedance: | Z _{ANT} = 50 Ω 2.4nH |
| RX terminating impedance: | Z _{RX} = 100 Ω (balanced) 11nH |
| TX terminating impedance: | Z _{TX} = 50 Ω |

| | | | | B8563 | | | |
|--------------------------------------|--------|-----|------------|--------------|-------------------------|-------------|----|
| Characterisitcs Tx - Rx | | | | min. | typ. @ 25 °C | max. | |
| Differential Mode Isolation α | | | | | | | |
| | 1574.0 | ... | 1577.0 MHz | 40 | 70 | | dB |
| | 1710.0 | ... | 1755.0 MHz | 55 | 58 | | dB |
| | 2110.0 | ... | 2155.0 MHz | 50 | 60 | | dB |
| | 3410.0 | ... | 3520.0 MHz | 20 | 70 | | dB |
| | 5120.0 | ... | 5275.0 MHz | 20 | 59 | | dB |
| Common Mode Isolation α | | | | | | | |
| | 1710.0 | ... | 1755.0 MHz | 48 | 51 | | dB |


Annotation for characteristics section

Attenuation of WCDMA signal ("Powertransferfunction", α_{WCDMA}) is determined by

$$\int_{-\infty}^{\infty} |S_{\text{ds21}}(f)H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$

f_{Carrier} according to 3GPP TS 25.101 (e.g. for UMTS-Passband, f_{Carrier} ranges from 882.4 MHz (lowest Tx channel) to 912.6 MHz (highest Tx channel)). $H_{\text{RRC}}(f)$ is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$

Data sheet



Maximum Ratings

| | | | | |
|-----------------------------------------|------------------|------------------|-----|---------------------------------------------------------------------------------------------------|
| Storage temperature range | T _{stg} | -40/+85 | °C | machine model, 10 pulses source and load impedance 50 Ω } continuous wave 50 °C, 5.000 h |
| DC voltage | V _{DC} | 5 | V | |
| ESD voltage | V _{ESD} | 50 ¹⁾ | V | |
| Input power at 1710.0 ... 1755.0 MHz | P _{IN} | 29 | dBm | |
| elsewhere | | 10 | dBm | |


1) acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



Power Transfer Function Tx-Ant:

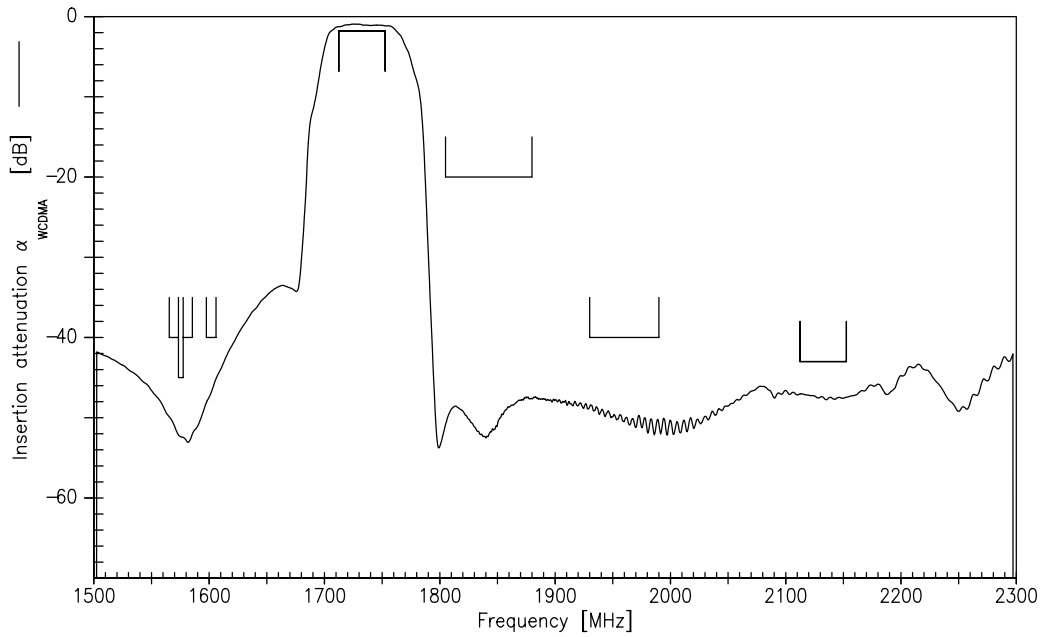


Power Transfer Function Tx-Ant (Wideband):

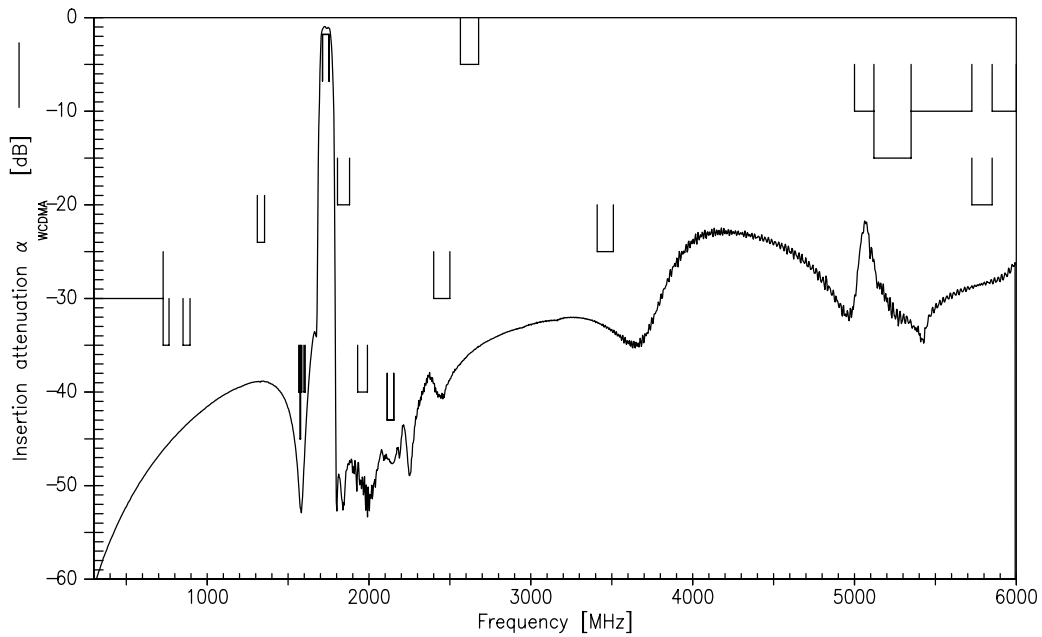


Please read *cautions and warnings* and *important notes* at the end of this document.



Power Transfer Function Ant-Rx:

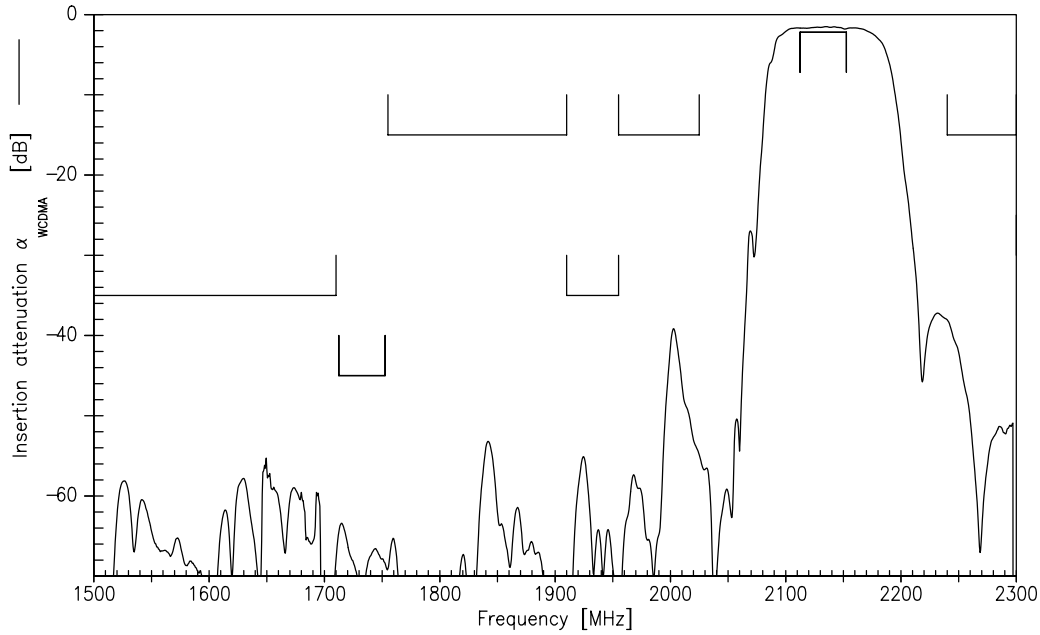


Power Transfer Function Ant-Rx (Wideband):

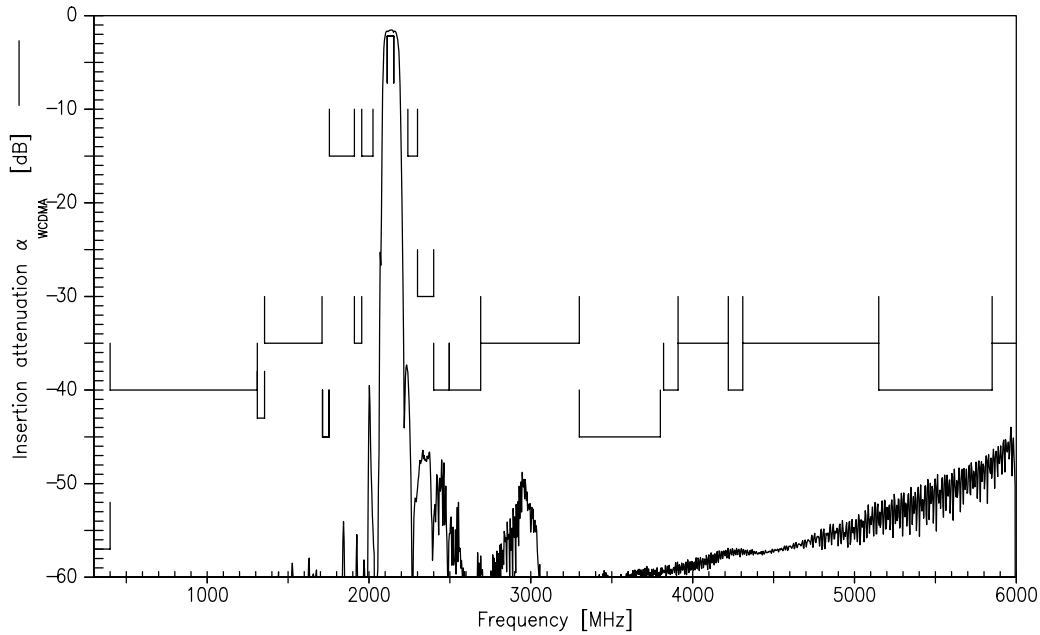


Please read *cautions and warnings* and *important notes* at the end of this document.



Power Transfer Function Tx-Rx isolation:

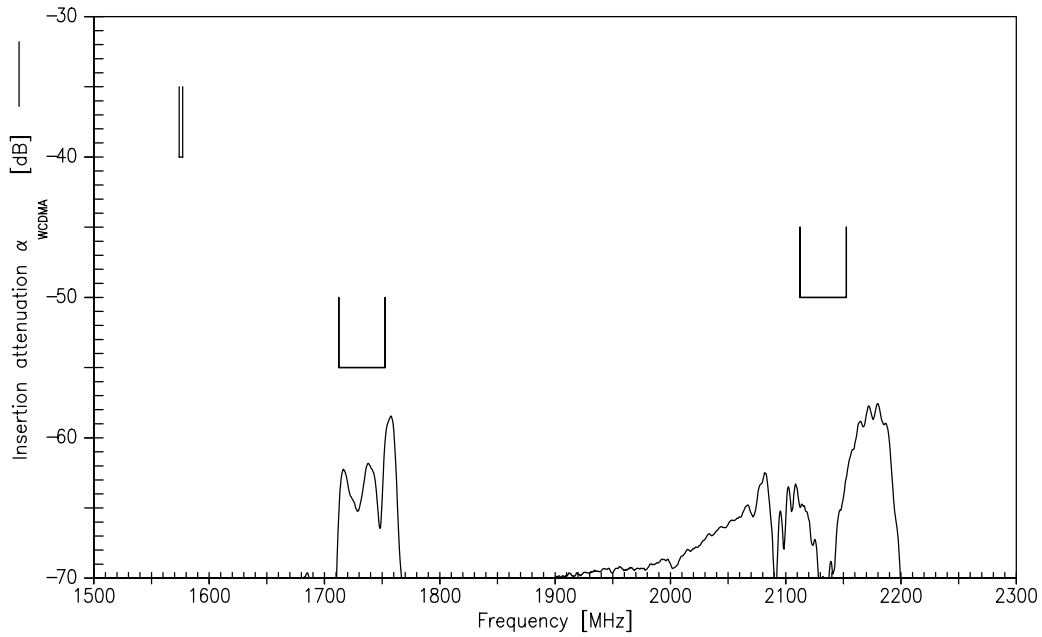

Power Transfer Function Tx-Rx isolation (Wideband):






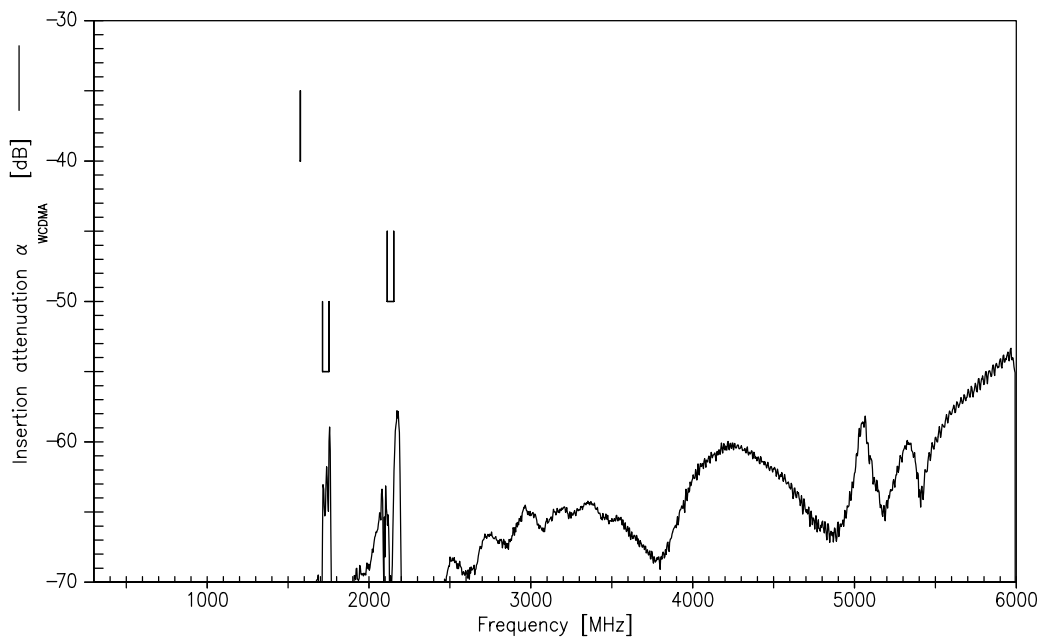


Please read *cautions and warnings and important notes* at the end of this document.

Data sheet



VSWRs at Tx, Rx and Ant:

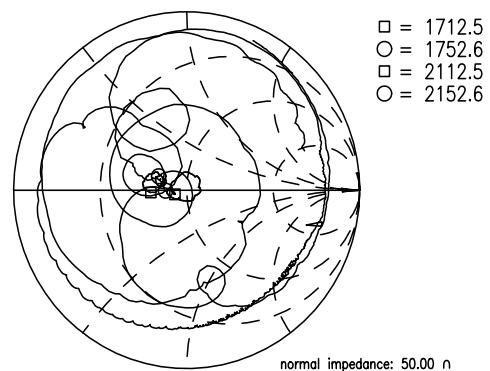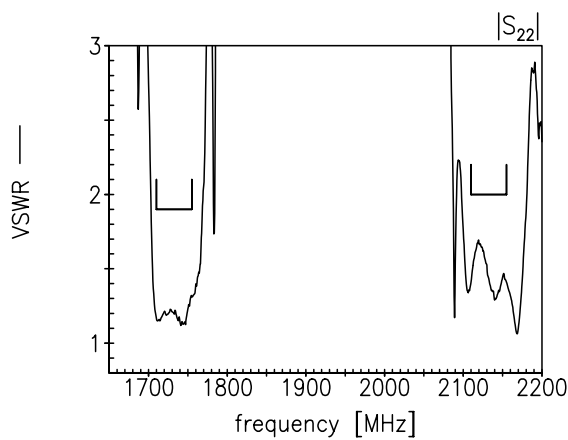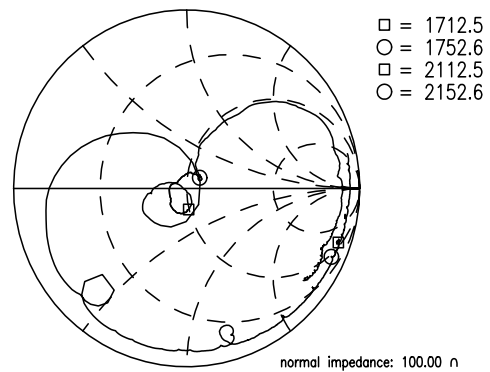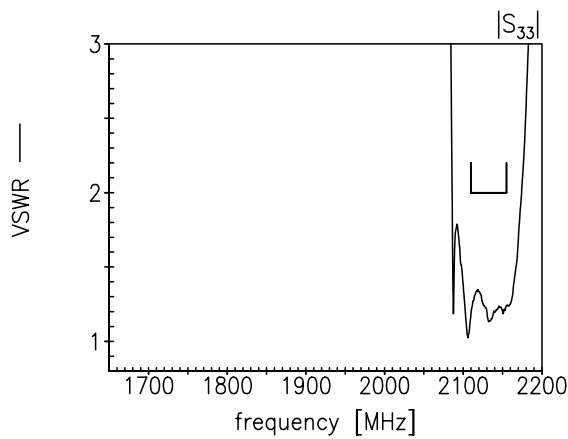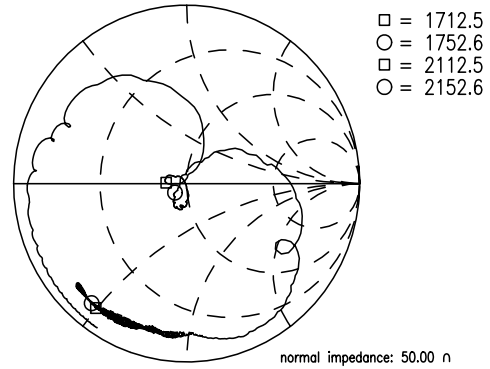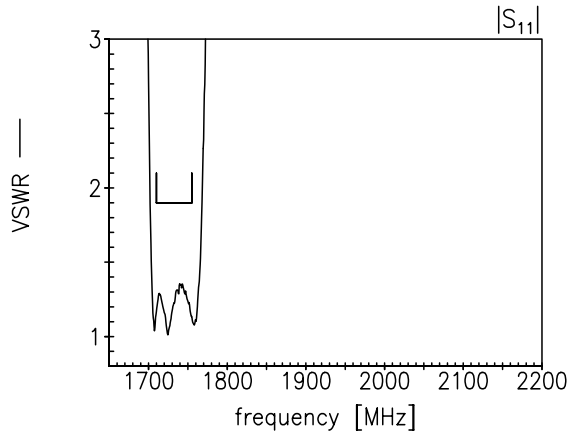

Please read *cautions and warnings* and *important notes* at the end of this document.


References

| | |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | B8563 |
| Ordering code | B39212B8563P810 |
| Marking and package | C61157-A8-A45-51-27 |
| Packaging | F61074-V8247-Z000-3-27 |
| Date codes | L_1126 |
| S-parameters | B8563_NB_UN.s4p, B8563_WB_UN.s4p See file header for pin/port assignement. |
| Soldering profile | S_6001 |
| RoHS compatible | defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment." |
| Moldability | Before using in overmolding environment, please contact your EPCOS sales office. |
| Matching coils | See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm |

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2011. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

16 January 27, 2012

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)