



# SAW Components

## GPS/GLONASS Extractor Filter

GPS/GLONASS Extractor

<b>Series/type:</b>	<b>B9839</b>
<b>Ordering code:</b>	<b>B39162B9839P810</b>
Date:	October 05, 2012
Version:	2.4


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


**Data Sheet**

**Application**


- Low loss GPS/GLONASS Extractor
- Using common antenna for GPS/GLONASS and NON-GPS/GLONASS bands (Cellular, PCS, WiFi, WCDMA bands)
- Placed between antenna and cellular front-end switches and filters
- Usable passbands 1574.42-1576.42, 1565.42 - 1585.42, 1597.55-1605.89, 704-960, 1427.9-1510.9, 1710-2690 MHz
- No switches and control lines required
- Integrated low loss GPS/GLONASS filter with single ended output 50  $\Omega$
- Low insertion attenuation in GPS/GLONASS and NON-GPS/GLONASS bands


**Features**

- Package size 1.7 x 1.3 mm<sup>2</sup> package height 0.45 mm max.
- RoHS compliant
- Approx. weight 0.003 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

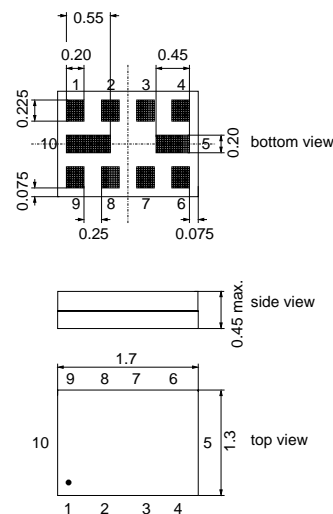
**Pin configuration**

- 1 ANT input
- 4 GPS/GLONASS output
- 9 NON-GPS/GLONASS output
- 2,3,5,6,7,8,10 To be grounded

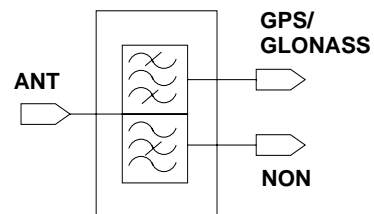

Please read *cautions and warnings and important notes* at the end of this document.

**Characteristics**

Temperature range for specification:	T = -30 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    15 nH (external matching)
GPS/GLONASS terminating impedance:	Z <sub>GPGL</sub> = 50Ω
NON-GPS/GLONASS terminating imped.:	Z <sub>NON</sub> = 50 Ω serial 3 nH (external matching)

				B9839			
				min.	typ. @ 25 °C	max.	
<b>Maximum insertion attenuation</b>							
			$\alpha_{\max}$				
ANT-GPS	1574.42 ... 1576.42	MHz		—	0.9	1.4	dB
ANT-GPS	1565.42 ... 1585.42	MHz		—	2.0	3.7	dB
ANT-GLONASS	1597.55 ... 1605.89	MHz		—	1.3	2.0	dB
ANT-NON	704.0 ... 824.0	MHz		—	0.75	1.4	dB
ANT-NON	824.0 ... 960.0	MHz		—	0.55	0.9	dB
ANT-NON	1427.9 ... 1462.9	MHz		—	0.55	0.9	dB
ANT-NON	1475.9 ... 1510.9	MHz		—	0.65	1.1	dB
ANT-NON	1710.0 ... 1995.0	MHz		—	1.0	1.4	dB
ANT-NON	2110.0 ... 2170.0	MHz		—	1.0	1.4	dB
ANT-NON	2400.0 ... 2483.5	MHz		—	0.85	1.2	dB
ANT-NON	2500.0 ... 2690.0	MHz		—	0.75	1.1	dB
<b>Amplitude ripple (p-p)</b>							
			$\Delta\alpha$				
ANT-GPS	1574.42 ... 1576.42	MHz		—	0.05	0.7	dB
ANT-GPS	1565.42 ... 1585.42	MHz		—	1.2	2.9	dB
ANT-GLONASS	1597.55 ... 1605.89	MHz		—	0.20	1.2	dB
<b>Attenuation ANT-GPS/GLONASS</b>							
	0.1 ... 824.0	MHz		34	37	—	dB
	824.0 ... 960.0	MHz		35	38	—	dB
	1427.9 ... 1510.9	MHz		35	41	—	dB
	1710.0 ... 1995.0	MHz		35	38	—	dB
	2110.0 ... 2170.0	MHz		35	39	—	dB
	2400.0 ... 2500.0	MHz		35	40	—	dB
	2500.0 ... 2690.0	MHz		35	41	—	dB
<b>VSWR (Antenna port)</b>							
GPS	1574.42 ... 1576.42	MHz		—	1.3	1.8	
GPS	1565.42 ... 1585.42	MHz		—	1.4	1.9	
GLONASS	1597.55 ... 1605.89	MHz		—	1.3	1.9	
NON	704.0 ... 824.0	MHz		—	1.2	1.8	
NON	824.0 ... 960.0	MHz		—	1.2	1.8	
NON	1427.9 ... 1462.9	MHz		—	1.5	1.9	
NON	1475.9 ... 1510.9	MHz		—	1.6	2.0	
NON	1710.0 ... 1995.0	MHz		—	1.25	1.8	
NON	2110.0 ... 2170.0	MHz		—	1.2	1.8	

Please read *cautions and warnings and important notes* at the end of this document.

				B9839			
				min.	typ. @ 25 °C	max.	
NON	2400.0	...	2483.5 MHz	—	1.2	1.8	
NON	2500.0	...	2690.0 MHz	—	1.3	1.8	
<b>VSWR (GPS/GLONASS port)</b>							
GPS	1574.42	...	1576.42 MHz	—	1.3	1.8	
GPS	1565.42	...	1585.42 MHz	—	1.5	2.7	
GLONASS	1597.55	...	1605.89 MHz	—	1.3	1.9	
<b>VSWR (NON port)</b>							
	704.0	...	824.0 MHz	—	1.4	1.8	
	824.0	...	960.0 MHz	—	1.25	1.8	
	1427.9	...	1462.9 MHz	—	1.5	1.9	
	1475.9	...	1510.9 MHz	—	1.6	2.0	
	1710.0	...	1995.0 MHz	—	1.4	1.8	
	2110.0	...	2170.0 MHz	—	1.2	1.8	
	2400.0	...	2483.5 MHz	—	1.2	1.8	
	2500.0	...	2690.0 MHz	—	1.3	1.8	
<b>Group delay ripple<sup>1)</sup> (p-p) ANT-GPS/GLONASS</b> $\Delta\tau$							
	1597.55	...	1605.89 MHz	—	4	12	ns
<b>Isolation between NON and GPS/GLONASS path</b> $\alpha$							
	704.0	...	824.0 MHz	35	38	—	dB
	824.0	...	960.0 MHz	35	38	—	dB
	1427.9	...	1510.9 MHz	35	41	—	dB
	1710.0	...	1995.0 MHz	35	39	—	dB
	2110.0	...	2170.0 MHz	35	39	—	dB
	2400.0	...	2483.5 MHz	35	42	—	dB
	2500.0	...	2690.0 MHz	35	43	—	dB

<sup>1)</sup> Measured with aperture 2 MHz.

**Maximum ratings**


Storage temperature range	$T_{\text{stg}}$	-40/+85	°C	at pin 1, 4 and 9 (ANT, GPS, NON) source and load impedance 50 $\Omega$
DC voltage	$V_{\text{DC}}$	3	V	
ESD voltage				
Machine Model	$V_{\text{ESD}}$	50 <sup>1)</sup>	V	
Human Body Model	$V_{\text{ESD}}$	$\pm 250$ <sup>2)</sup>	V	
Input power at	$P_{\text{IN}}$			
704 ... 915 MHz	$P_{\text{IN}}$	31	dBm	
1427.9 ... 1462.9 MHz	$P_{\text{IN}}$	31	dBm	
1710 ... 2690 MHz	$P_{\text{IN}}$	31	dBm	

1) acc. to JESD22-A115A (machine model)


2) acc. to JESD22-A114 (Human body model,  $R_s = 1500 \Omega$ ,  $C_s = 100 \text{ pF}$ )



**ANT - GPS/GLONASS (transfer function passband):**

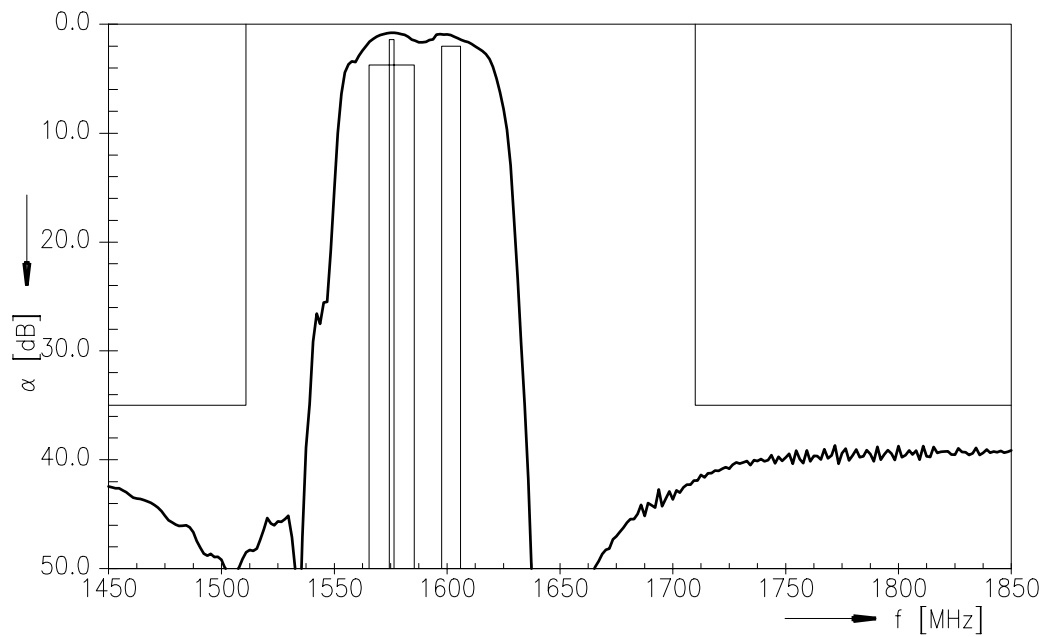


**ANT - GPS/GLONASS (transfer function wideband):**

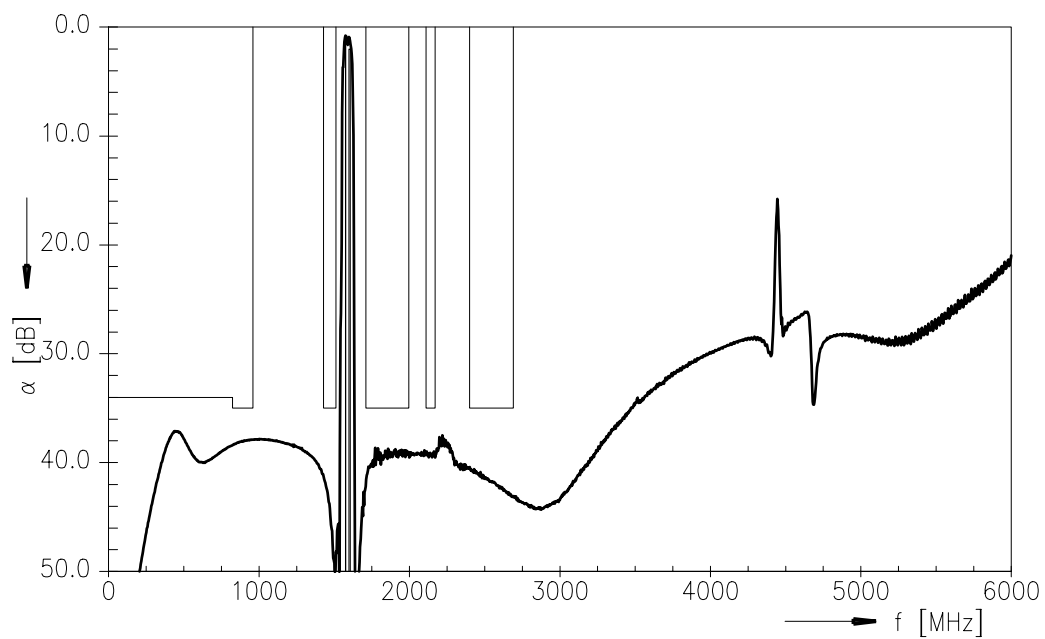


Please read *cautions and warnings* and *important notes* at the end of this document.

**ANT - NON (transfer function):**

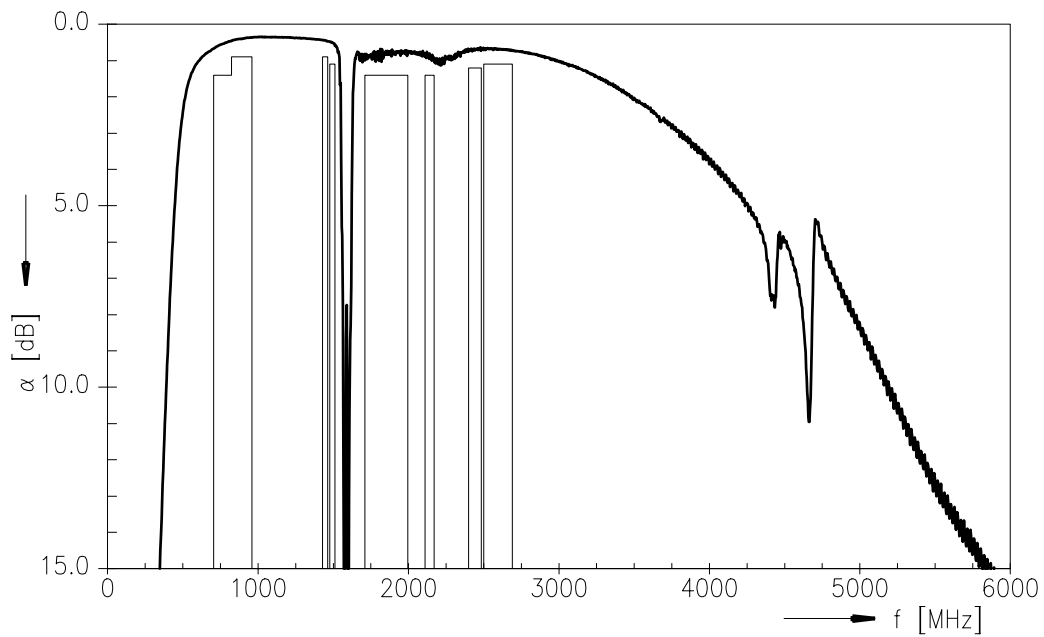

**GPS - NON (isolation, transfer function):**

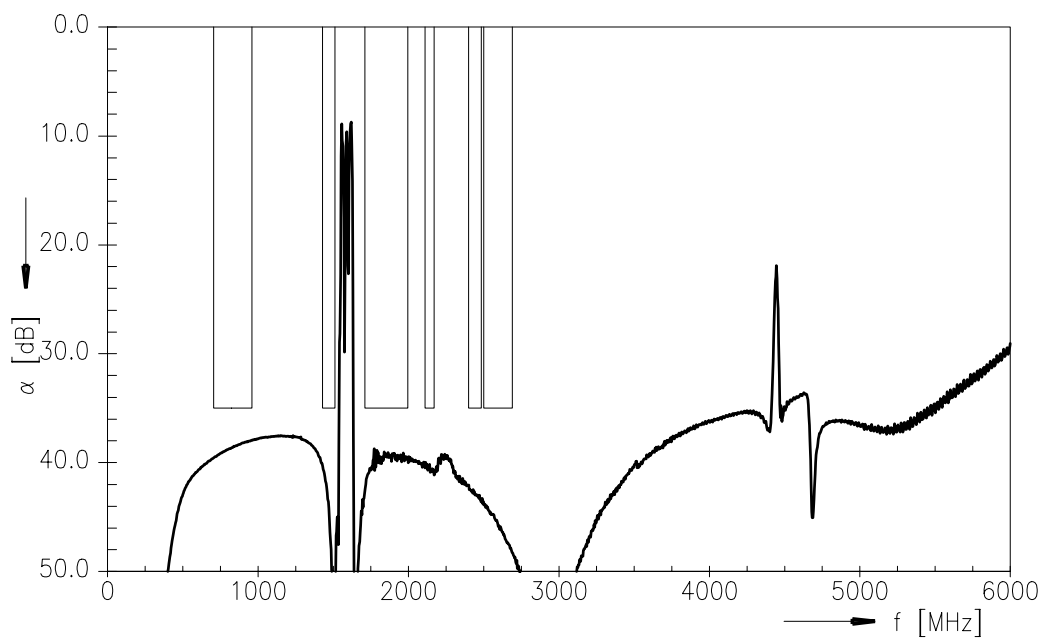



Please read *cautions and warnings* and *important notes* at the end of this document.

Data Sheet





Smith charts / VSWR



S<sub>11</sub> ANT

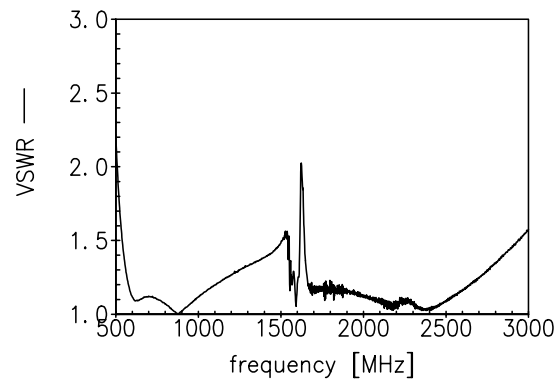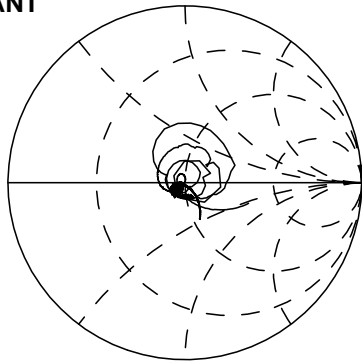

S<sub>22</sub> GPS/GLONASS

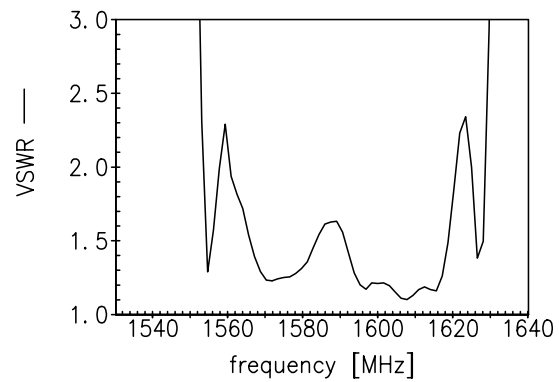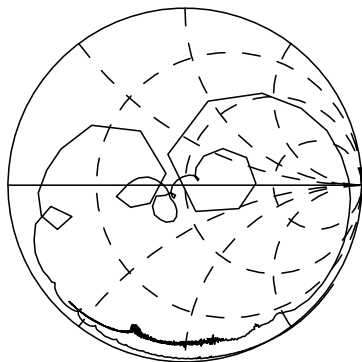

S<sub>33</sub> NON

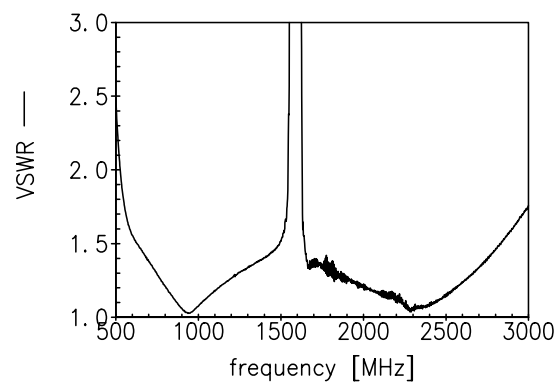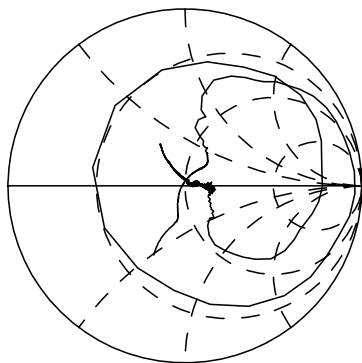

Please read *cautions and warnings* and *important notes* at the end of this document.




**References**

<b>Type</b>	B9839
<b>Ordering code</b>	B39162B9839P810
<b>Marking and package</b>	C61157-A8-A49
<b>Packaging</b>	F61074-V8222-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B9839_NB_UN.s3p, B9839_WB_UN.s3p see file header for port/pin assignment table
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 <sup>th</sup> , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2012. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).

Please read *cautions and warnings and important notes* at the end of this document.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)