


## YAS2/D2P22——2A 700V SSR

### 概述 Features

- 厚度3.0mm SSR Thickness 3.0mm SSR
- 调相型 Non zero-cross
- 负载电流至2A Load current up to 2A
- 阻断电压700V Repetitive peak off-state voltage 700V
- 介质耐压3000V Dielectric strength 3000V
- 符合RoHS RoHS compliant




### 获得认证 Agency approvals

- UL - E481250
- cUL - E481250

### 应用 Applications

- 家电产品（空调、冰箱、洗衣机、微波炉、卫浴等）  
Home appliances (air conditioners, refrigerators, washing machines, microwave ovens, personal hygiene product etc.)
- 工业控制 Industrial control

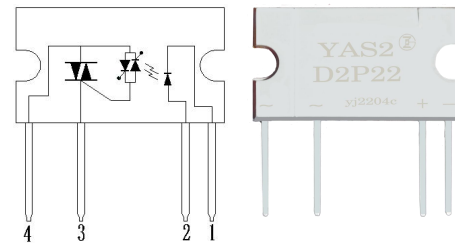

### 打印标志 Marking information

Part number	Package	Marking
YAS2/D2P22	SIP4	YAS2 D2P22

### 极限值 Absolute maximum ratings

(Ta=25°C)

特性参数/Parameter		符号/Symbol	测试条件/Test condition	最小值/Min.	典型值/Typ.	最大值/Max.	单位/Unit
输入端/Input	LED 反向电压/LED reverse voltage	$V_R$		6			V
	LED 正向电流/LED forward current	$I_F$				50	mA
输出端/Output	阻断电压/Repetitive peak off-state voltage	$V_{DRM}/V_{RRM}$		700			V
	额定电流/On-state RMS current	$I_{T(RMS)}$	$I_{in}=10mA$			2	A
	浪涌电流/Surge current	$I_{TSM}$	50Hz, 1 cycle		30		A
介质耐压/I/O Dielectric strength *		$V_{ISO}$	$I_{ISO} \leq 0.3mA$	3000			$V_{rms}$
工作温度/Operating temperature		$T_{OP}$		-30		85	°C
储存温度/Storage temperature		$T_{stg}$		-40		125	°C

“\*”：RH=40 to 60%, T=20~30°C, AC for 1minute.

## 电参数 Electrical parameters


特性参数/Parameter		符号 /Symbol	测试条件 /Test condition	最小 值 /Min.	典型值 /Typ.	最大值 /Max.	单位 /Unit
输入端/Input	LED 正向电压/LED forward voltage	$V_F$	$I_F=10mA$		1.2	1.3	V
	LED 反向电流/LED reverse current	$I_R$	$V_R=5V$			10	$\mu A$
输出端/Output	断态泄漏电流/Output off-state leakage current	$I_{DRM}$	$V_{DRM}=700V$			10	$\mu A$
	断态泄漏电流/Output off-state leakage current	$I_{RRM}$	$V_{RRM}=700V$			10	$\mu A$
	负载电压/Load voltage	$V_{ac}$		48		264	V
	电压指数上升率 /Critical rate of rise of off-state voltage	$dv/dt$	$V_{DRM}=600V*1/\sqrt{2}$	200			$V/\mu s$
	最小负载电流/Min. load current	$I$		100			mA
耦合特性 /Transfer characteristics	LED 触发电流/LED trigger current	$I_{FT}$	$V_o=6V, R_L=100\Omega$		3	8	mA
	推荐的工作电流/Recommend operating current	$I_{in}$		10		18	mA
	关断电压/ Must release voltage	$V_{off}$		1.2			V
	导通电压降/Output on-state voltage drop	$V_T$	$I_{in}=10mA, I_L=2A, V_D=6V$		1.2	1.5	V
	导通时间/Turn on time	$T_{on}$	$I_{in}=10mA, V_D=6V, R_L=100\Omega$		0.01	1	ms
	关断时间/Turn off time	$T_{off}$				1+1/2cycle	ms

### 安规要求 Safety and insulation ratings:

爬电距离	Creepage distance:	4.3mm, CTI $\geq$ 275;
瞬时过电压	Highest allowable overvoltage	4000V;
再现峰值电压	$V_{IORM}$	769V;
局部放电	Partial discharge test voltage:	
	方法b Method b, $V_{pd} = V_{IORM} \times 1.6$	1230V.

### 外形尺寸 Outline dimension :mm

#### 1、SIP4

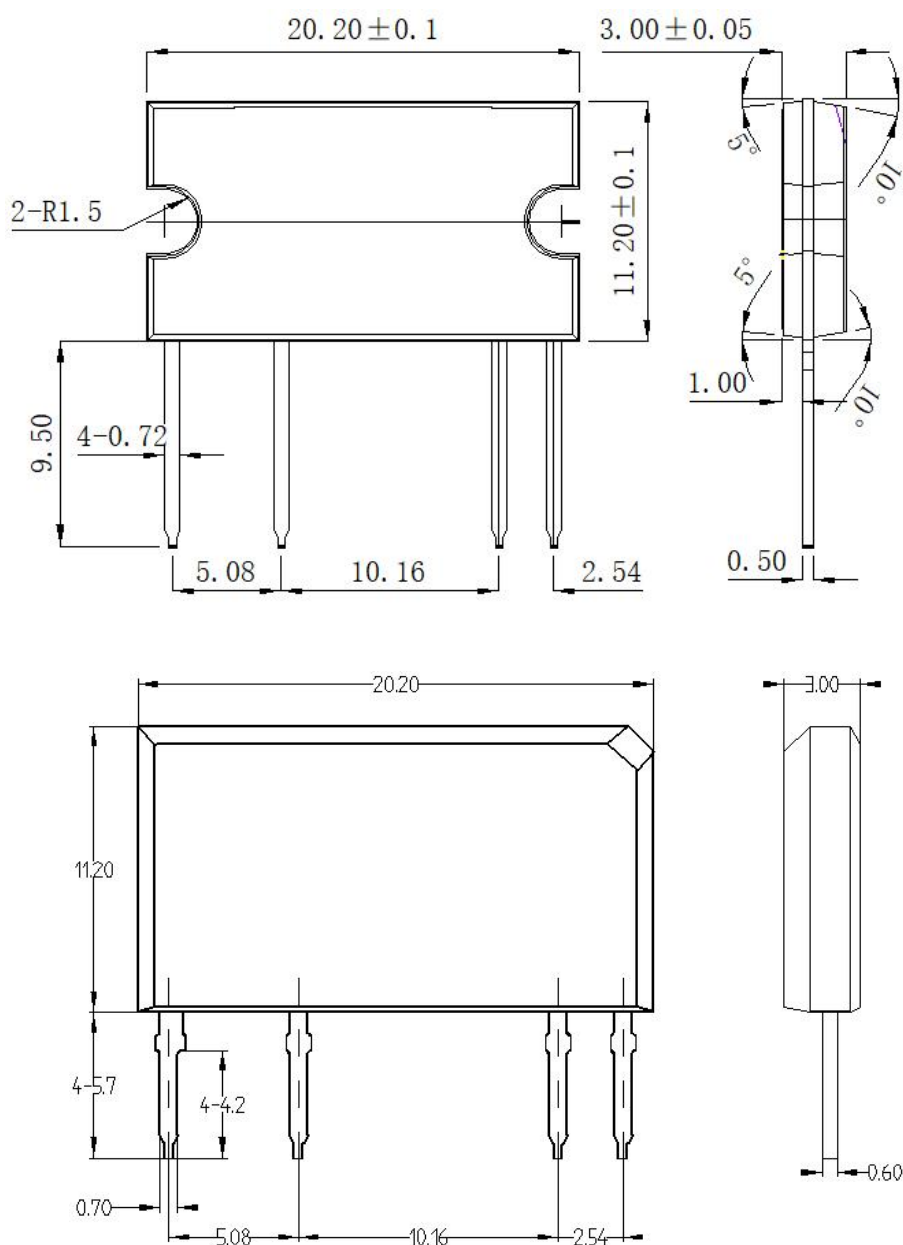


## 订货信息 Ordering information


订货信息/Ordering information							
	Y	AS	2/	D	2	P	22
公司商标代号 Company symbol							
交流输出型 AC SSR							
封装 Package: 2: SIP4							
输入端电流型 Current driving: D							
负载电流 Load current: 1-1A;1.2-1.2A;2-2A							
P:调相型 Non zero-cross Z:过零型 Zero-cross;							
负载电压 Load voltage: 22:220Vac;38:380Vac							

## 特性曲线 Characteristic data


1. 负载电流与环境温度关系曲线  
Load current VS. ambient temperature

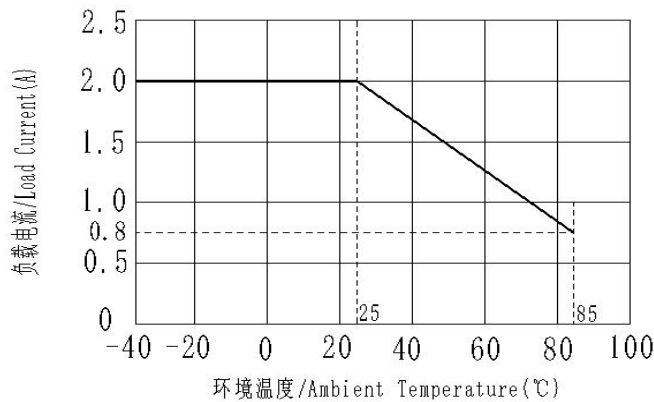

2. 导通压降—环境温度特性  
On-state voltage drop VS. ambient temperature

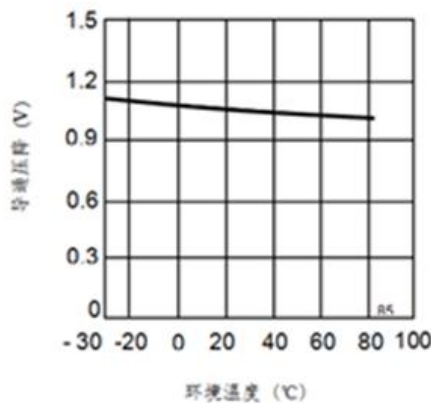


3. 重复峰值关断电流—负载电压  
Repetitive peak turn off current—Load voltage

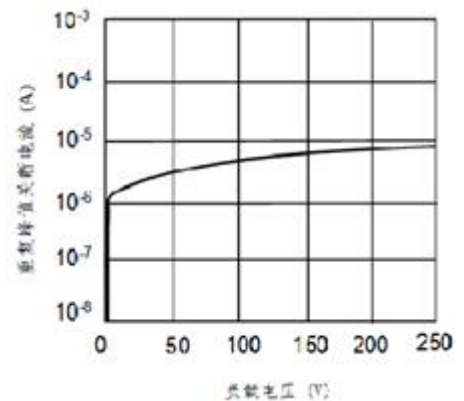


#### 4. LED导通压降—环境温度特性

LED dropout voltage vs. ambient temperature  
LED current: 10 to 50 mA

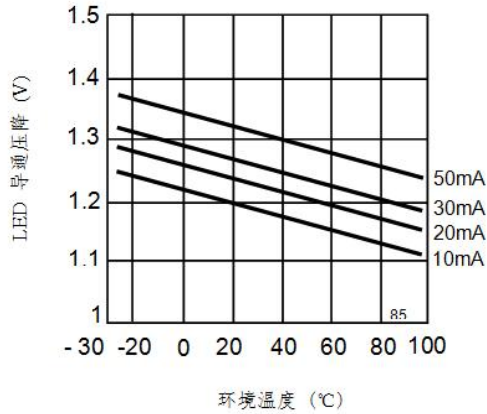


#### 5. 导通时间—LED电流特性

Turn on time vs. LED current

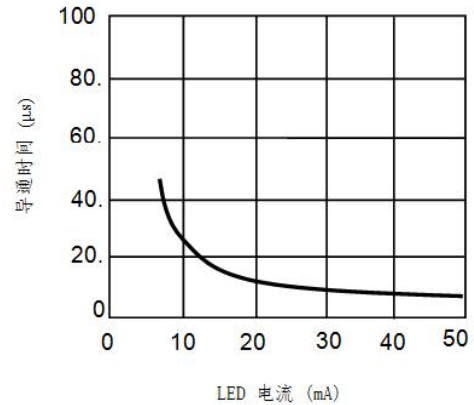


#### 接通和关断时间关系 Turn on and turn off time

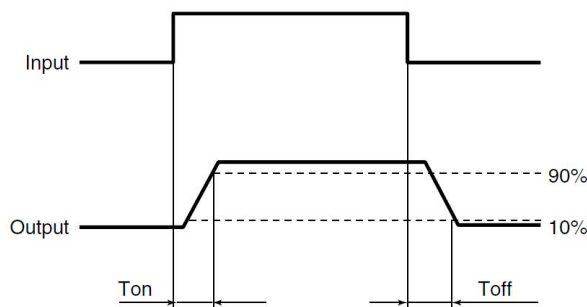

#### 安装孔尺寸图 Fixing layout


Unit:mm

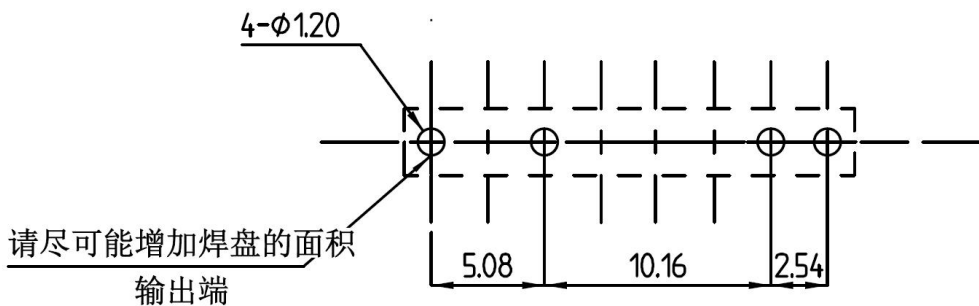


Please enlarge the solder pads of output.

## 注意事项 Notes

- a) 工作环境温度超过 25℃时请降额使用。参见特性曲线。  
When ambient temperature is above 25℃, the load current must be reduced. (see characteristic data )
- b) 继电器接线时，务必保证输入端极性的正确，以免损坏继电器。  
Ensuring the polarity is correct when connecting the input lines, otherwise the wrong connection will damage the relay.
- c) 由于 SSR 动作时间很短，输入端的噪声可能会引起 SSR 误动作，所以在输入端环境噪声较大时，应在输入端接 R/C 回路吸收噪声。  
Since the operate time of the relay is extremely short, any noise to input terminal will cause malfunction of the SSR, So a RC circuit should be connected to input terminal to absorb the noise in the noisy condition.

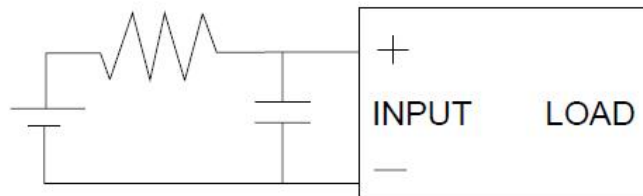

- d) 推荐的使用电路，输出端的尖峰电压可能会引起 SSR 误动作，所以请在输出端应加 R/C 回路或压敏电阻吸收尖峰电压，具体见下图：  
Below shows a recommend circuit: Please add a RC circuit or varistor on the load side, as noise/surge could damage the unit or cause malfunctions.

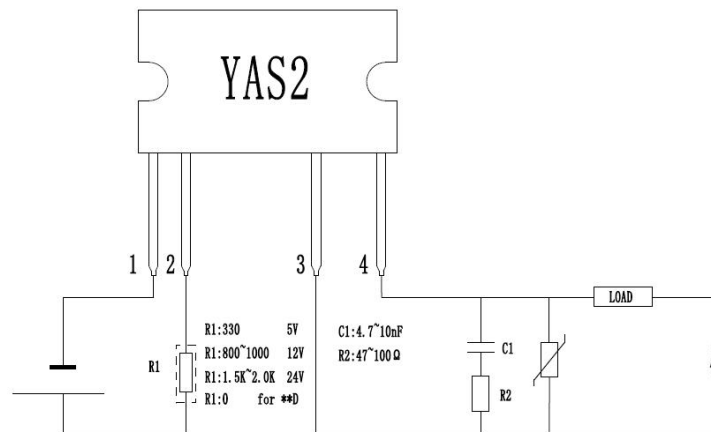

## 关于防静电对策 Cautions for static electricity

- a. 使用电烙铁时，对电烙铁前端进行接地。(建议使用低电压用的电烙铁。) When using soldering irons, either use irons with low leakage current, or ground the tip of the soldering iron. (Use of low-voltage soldering irons is also recommended.)
- b. 组装时使用的设备等也应正确地接地。Devices and equipment used in assembly should also be grounded.

## 关于焊接 Soldering

继电器焊接, 260 度情况下焊接时间不能超过 10 秒钟, 350 度情况下焊接时间不能超过 5 秒钟。  
Soldering must be completed within 10 seconds at 260℃ or within 5 seconds at 350℃.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Silicon Billion\(硅兆\)](#)