


## Feature

- Fail-safe circuitry
- Low power consumption
- Up to 128 transceivers can be attached to the bus
- Maximum transmission rate: 10Mbps
- ESD:  $\geq \pm 15\text{kV}$
- DIP-8,SOP-8,MSOP-8, Package

## Applications

- RS-485 Communications
- Level Translators
- Security Equipment
- Industrial Control Equipment
- Watt-hour meter

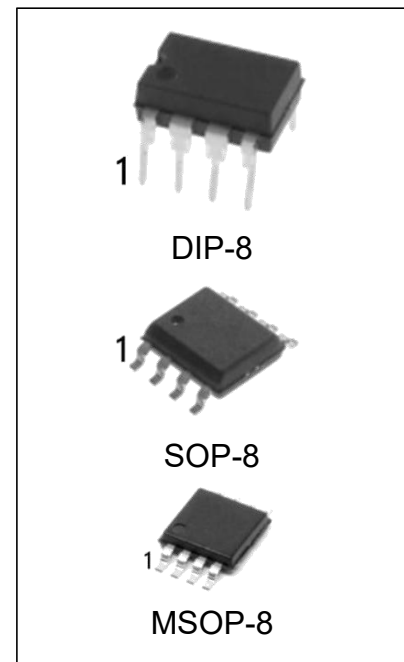


## Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
SN65176BPG	DIP-8	65176B	TUBE	2000pcs/reel
SN65176BDRG	SOP-8	65176B	REEL	2500pcs/reel
SN65176BDGKRG	MSOP-8	65176B	REEL	3000pcs/reel
SN75176BPG	DIP-8	75176B	TUBE	2000pcs/reel
SN75176BDRG	SOP-8	75176B	REEL	2500pcs/reel
SN75176BDGKRG	MSOP-8	75176B	REEL	3000pcs/reel

## General Description


The SN65176B/75176B is high-speed transceivers for RS-485 communication, which contain one driver and one receiver. The SN65176B/75176B feature fail-safe circuitry, which guarantees a logic-high receiver output when the receiver inputs are open or shorted. This means that the receiver output will be a logic high if all transmitters on a terminated bus are disabled (high impedance). The SN65176B/75176B driver slew rates are not limited, making transmit speeds up to 10Mbps possible.. And this device has a 1/8-unit-load receiver input impedance that allows up to 128 transceivers on the bus.

## Pin Assignment

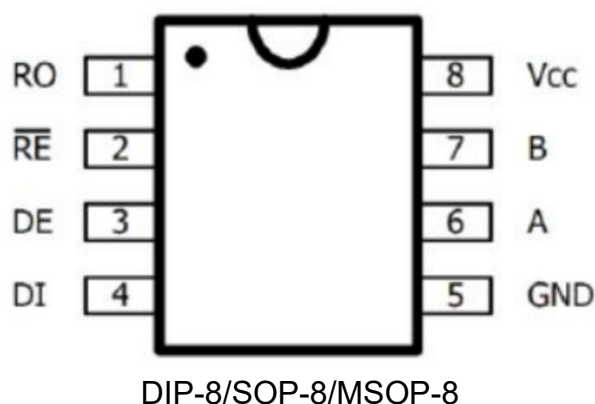

## Pin Description

PIN	NAME	FUNCTION
1	RO	Receiver Output, When RE is low and if $A - B \geq -50\text{mV}$ , RO will be high; if $A - B \leq -200\text{mV}$ , RO will below.
2	/RE	Receiver Output Enable. Drive RE low to enable RO; RO is high impedance when RE is high. Drive RE high and DE low to enter low-power shutdown mode.
3	DE	Driver Output Enable. Drive DE high to enable driver outputs. These outputs are high impedance when DE is low. Drive RE high and DE low to enter low-power shutdown mode.
4	DI	Driver Input. With DE high, a low on DI forces noninverting output low and inverting output high.
5	GND	Ground
6	A	Noninverting Receiver Input and Noninverting Driver Output
7	B	Inverting Receiver Input and Inverting Driver Output
8	VCC	Positive Supply

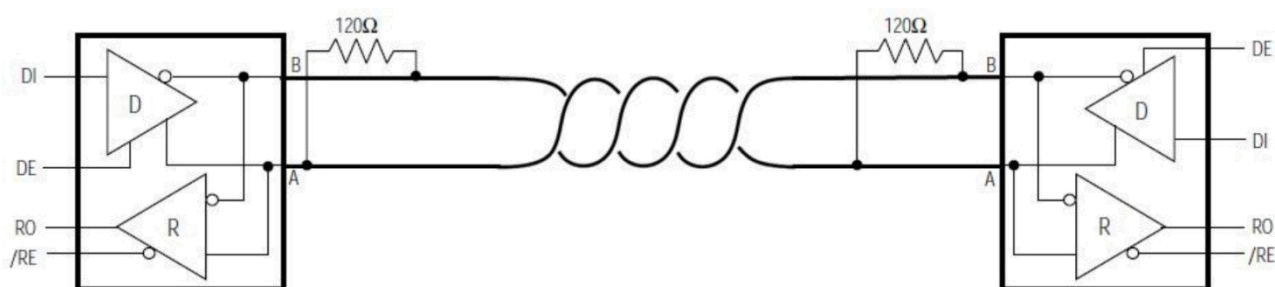**Typical application circuit**

**Absolute Maximum Ratings** (TA=25°C)

PARAMETER		MIN	MAX	UNITS
Supply Voltage (V <sub>CC</sub> )		-	+7V	V
Control Input Voltage (/RE, DE)		-0.3	V <sub>CC</sub> +0.3V	V
Driver Input Voltage (DI)		-0.3	V <sub>CC</sub> +0.3V	V
Driver Output Voltage (A,B)		-13V	+13V	V
Receiver Input Voltage (A,B)		-13V	+13V	V
Receiver Output Voltage (R <sub>O</sub> )		-0.3	V <sub>CC</sub> +0.3V	V
Operating Temperature (T <sub>OPR</sub> )	SN75176B	0	+70	°C
	SN65176B	-40	+85	°C
Storage Temperature (T <sub>STG</sub> )		-65	+150	°C
Lead Temperature (Soldering, 10 seconds)		-	+245	°C

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

**DC ELECTRICAL CHARACTERISTICS** ( $V_{CC}=5V$ ,  $T_A=25^{\circ}C$ ) <sup>(1)</sup>

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Differential Driver Output (no load)	$V_{OD1}$	R=27 $\Omega$ , Figure 1		-	-	VCC	V
Differential Driver Output	$V_{OD2}$			1.8	-	-	V
Change in Magnitude of Differential Output Voltage	$\Delta V_{OD}$			-	-	0.2	V
Driver Common-Mode Output Voltage	$V_{OC}$			1.0	-	3.0	V
Change in Magnitude of Common-Mode Voltage <sup>(2)</sup>	$\Delta V_{OC}$			-	-	0.2	V
Input High Voltage	$V_{IH}$	DE, DI, /RE		2.0	-	-	V
Input Low Voltage	$V_{IL}$	DE, DI, /RE		-	-	0.8	V
DI Input Hysteresis	$V_{HYS}$	-		-	100	-	mV
Driver Input Current (A And B)	$I_{IN1}$	VIN=12V	DE=0V,	-	-	150	$\mu A$
		VIN=-7V	VCC=0V/5.25V	-150	-	-	$\mu A$
Driver Short-Circuit Output Current <sup>(3)</sup>	$I_{OSD}$	A and B Short-Circuit		-100	-	100	mA
Receiver Differential Threshold Voltage	$V_{TH}$	$-7V \leq V_{CM} \leq 12V$		-200	-125	-50	mV
Receiver Input Hysteresis	$\Delta V_{TH}$	-		-	40	-	mV
Receiver Output High Voltage	$V_{OH}$	IO=-4mA, $V_{ID}=-50mV$		VCC-1	-	-	V
Receiver Output Low Voltage	$V_{OL}$	IO=4mA, $V_{ID}=-200mV$		-	-	0.4	V
Three-State Output Current at Receiver	$I_{OZR}$	$0.4V \leq V_o \leq 2.4V$		-	-	$\pm 1$	$\mu A$
Receiver Input Resistance	$R_{IN}$	$-7V \leq V_{CM} \leq 12V$		96	-	-	K $\Omega$
Receiver Output Short -Circuit Current	$I_{OSR}$	$0V \leq V_{RO} \leq V_{CC}$		$\pm 7$	-	$\pm 100$	mA
Supply Current	$I_{CC}$	DE=VCC	No Load /RE=DI=VCC/GND	-	450	900	$\mu A$
		DE=GND		-	450	600	$\mu A$
Supply Current in Shutdown Mode	$I_{SHDN}$	DE=GND, /RE=VCC, DI=VCC/GND		-	-	10	$\mu A$

Note 1: All currents into the device are positive; all currents out of the device are negative. All voltages are referred to device ground unless otherwise noted.

Note 2:  $\Delta V_{OD}$  and  $\Delta V_{OC}$  are the changes in  $V_{OD}$  and  $V_{OC}$ , respectively, when the DI input changes state.

Note 3: Maximum current level applies to peak current just prior to foldback-current limiting; minimum current level applies during current limiting.

**Switching Characteristics** (VCC=5V, TA=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
Driver Input to Output	t <sub>DPLH</sub>	Figure 3 and 5, R <sub>DIFF</sub> =54Ω C <sub>L1</sub> =C <sub>L2</sub> =100pF	-	30	60	ns	
	t <sub>DPHL</sub>		-	30	60	ns	
Driver Output Skew  T <sub>DPLH</sub> – T <sub>DPHL</sub>	t <sub>DSKEW</sub>		-	-	20	ns	
Driver Rise or Fall Time	t <sub>DR</sub> , t <sub>DF</sub>		-	30		ns	
Maximum Data Rate	F <sub>MAX</sub>		-	10	-	-	Mbps
Driver Enable to Output High	t <sub>DZH</sub>		Figure 4 and 6, C <sub>L</sub> =100pF S2 closed	-	-	70	ns
Driver Disable Time from High	t <sub>DHZ</sub>	-		-	70	ns	
Driver Enable to Output Low	t <sub>DZL</sub>	Figure 4 and 6, C <sub>L</sub> =100pF S1 closed	-	-	70	ns	
Driver Disable Time from Low	t <sub>DLZ</sub>		-	-	70	ns	
Receiver Input to Output	t <sub>RPLH</sub> t <sub>RPHL</sub>	Figure 7 and 9,  V <sub>ID</sub>   ≥ 2.0V, rise and fall time of V <sub>ID</sub> ≤ 15ns	-	90	250	ns	
T <sub>RPLH</sub> –T <sub>RPHL</sub>   Differential Receiver Skew	t <sub>RSKD</sub>		-	30	-	ns	
Receiver Enable to Output Low	t <sub>RZL</sub>	Figure 2 and 8, C <sub>RL</sub> =15pF S1 closed	-	30	70	ns	
Receiver Disable Time from Low	t <sub>RLZ</sub>		-	30	70	ns	
Receiver Enable to Output High	t <sub>RZH</sub>	Figure 2 and 8, C <sub>RL</sub> =15pF S2 closed	-	30	70	ns	
Receiver Disable Time from High	t <sub>RHZ</sub>		-	30	70	ns	
Time to Shutdown	t <sub>SHDN</sub>	-	-	200	600	ns	

## Function Tables

### Transmitting

INPUTS			OUTPUTS	
/RE	DE	DI	A	B
X	1	1	1	0
X	1	0	0	1
0	0	X	High-Z	High-Z
1	0	X	Shutdown	

### Receiving

INPUTS			OUTPUT	
/RE	DE	A-B	RO	
0	X	$\geq -0.05V$	1	
0	X	$\leq -0.2V$	0	
0	X	Open/shorted	1	
1	1	X	High-Z	
1	0	X	Shutdown	

### Test circuit

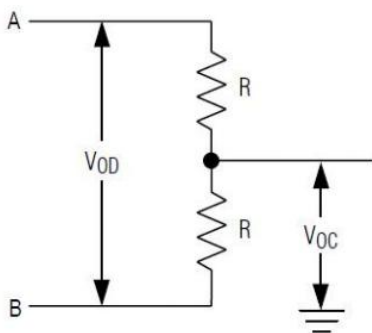


Figure 1. Driver DC Test Load

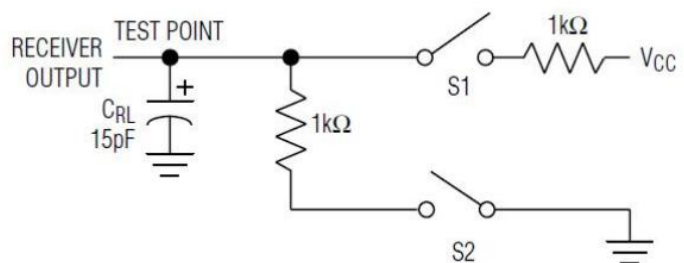


Figure 2. Receiver Enable/Disable Timing Test Load

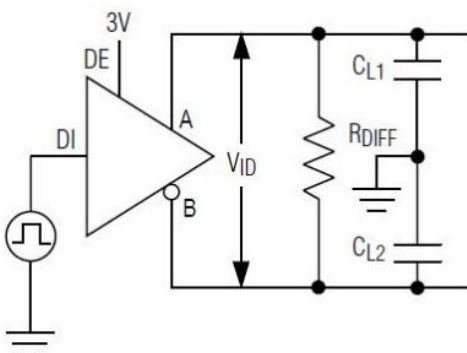


Figure 3. Driver Timing Test Circuit

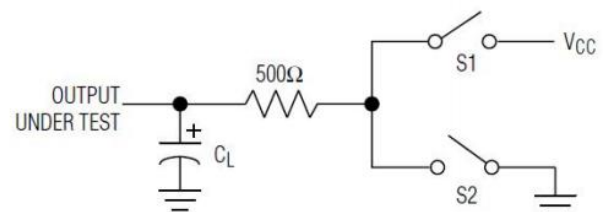


Figure 4. Driver Enable/Disable Timing Test Load

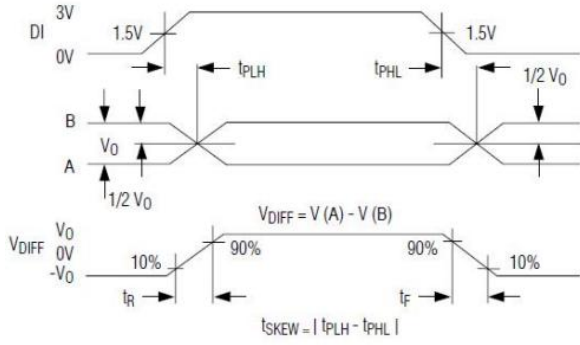


Figure 5. Driver Propagation Delays

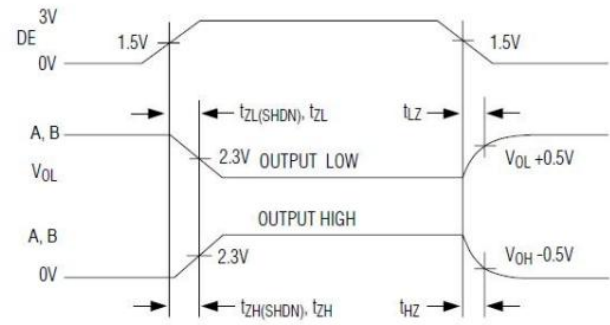


Figure 6. Driver Enable and Disable Times

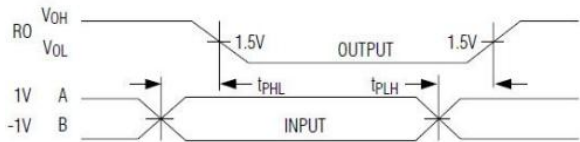


Figure 7. Receiver Propagation Delays


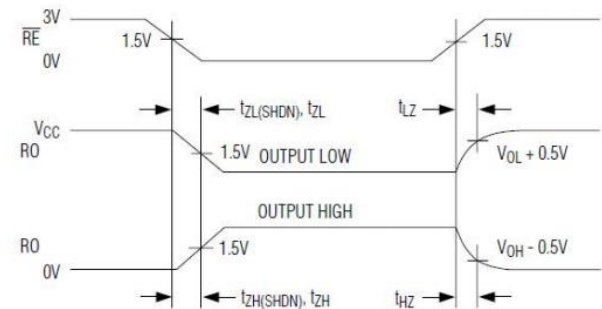


Figure 8. Receiver Enable and Disable Times

## Physical Dimensions


### DIP-8

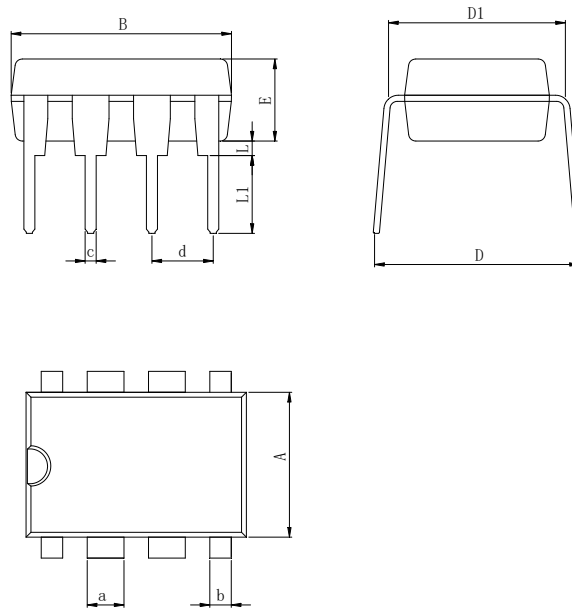

**Dimensions In Millimeters(DIP-8)**

Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
<b>Min:</b>	6.10	9.00	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
<b>Max:</b>	6.68	9.50	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

### SOP-8 (150mil)

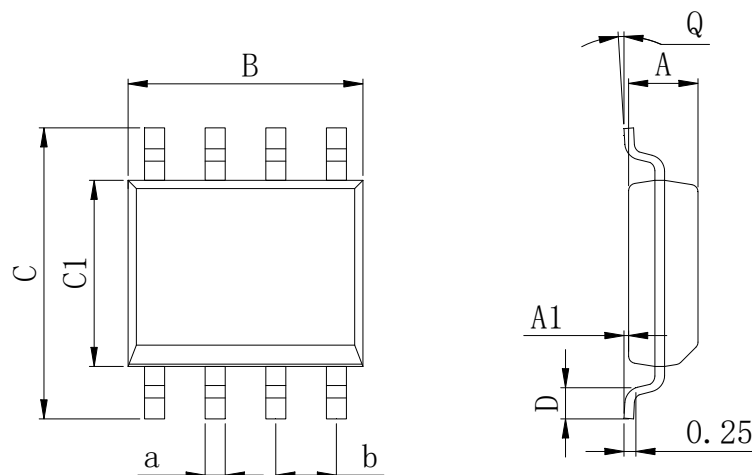


**Dimensions In Millimeters(SOP-8)**

Symbol:	A	A1	B	C	C1	D	Q	a	b
<b>Min:</b>	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
<b>Max:</b>	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	



**Physical Dimensions**

MSOP-8

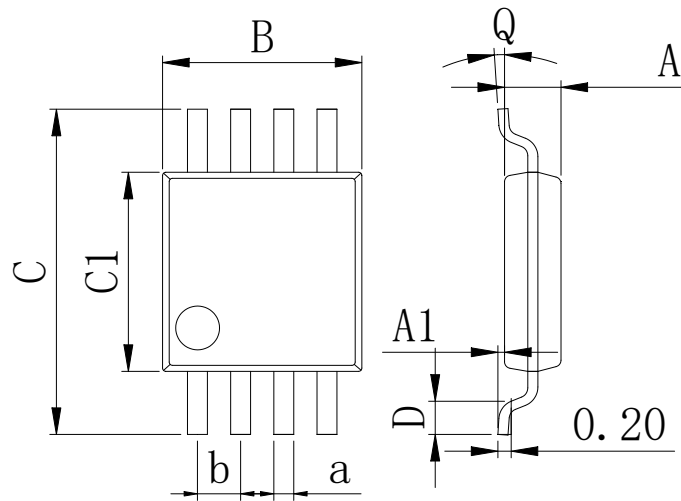
**Dimensions In Millimeters(MSOP-8)**

Symbol:	A	A1	B	C	C1	D	Q	a	b
<b>Min:</b>	0.80	0.05	2.90	4.75	2.90	0.35	0°	0.25	0.65 BSC
<b>Max:</b>	0.90	0.20	3.10	5.05	3.10	0.75	8°	0.35	

## Revision History

DATE	REVISION	PAGE
2014-1-5	New	1-11
2024-1-2	Document Reformatting	1-11

**IMPORTANT STATEMENT:**

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.

单击下面可查看定价，库存，交付和生命周期等信息

[>>HGC\(深圳汉芯\)](#)