

REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
A1	-	RELEASED DRAWING	Feb-14-19	White	Tommy		





## NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER
- 2. SPECIFICATIONS:
  - 2.1 CURRENT RATING: 100 AMPS 2.2 VOLTAGE RATING: 1000 V AC/DC 2.3 OPERATING TEMPERATURE: -55°C TO +125°C 2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2
  - MILLIAMPS CURRENT LEAKAGE @ 3000 VOLTS AC. 2.5 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C. 2.6 MOISTURE RESISTANCE: IP67 AND IP69K IN THE MATED
  - CONDITION. 2.7 MATING CYCLE DURABILITY: 100 CYCLES 2.8 Rohs Compliant
- 3. SUITABLE CONTACTS:4# CONTACTS
- 4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 5. CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
4	7.1 mm	7.4 mm	6 AWG








TITLE

AT SERIES, PLUG, 1 PIN, SOCKET

DWG NO:

ATHD06-1-4S

REV: A1 SH:

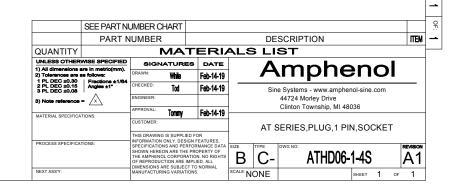



单击下面可查看定价,库存,交付和生命周期等信息

>>Amphenol(安费诺)