


Customer Drawing



订购信息 Ordering Information

PL18 X - 30 1 - 70

键位及颜色 Key & Color	高压互锁 HWLL	线径大小 Cable Size
"X", 橙色 Orange	0, 不带互锁 No HWLL	"10"=70mm ²
"Y", 黑色 Black	1, 带互锁 With HWLL	"30"=50mm ²
"U", 黄色 Yellow		"35"=35mm ²
"V", 绿色 Green		
"W", 红色 Red		
"1", 蓝色 Blue		

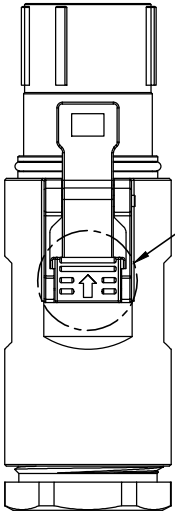


按键颜色见“订购信息”
The color of press key see "Ordering Information"

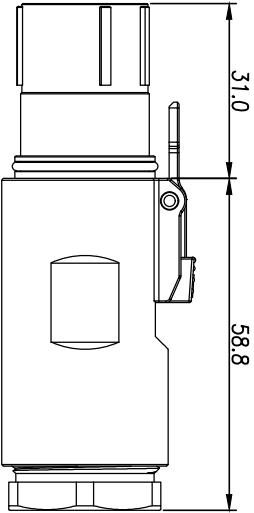

防触摸塑料盖
Touch Proof Pin

P/N	Model NO.	Accepted Wire (0)
AC-HA000815	PL18X-301-35	
AC-HA000816	PL18Y-301-35	
AC-HA000817	PL18U-301-35	
AC-HA000818	PL18V-301-35	14.5±0.5
AC-HA000819	PL18W-301-35	
AC-HA001283	PL18T-301-35	
AC-HA000820	PL18X-301-50	
AC-HA000821	PL18Y-301-50	
AC-HA000822	PL18U-301-50	
AC-HA000823	PL18V-301-50	17.0±0.5
AC-HA000824	PL18W-301-50	
AC-HA001284	PL18T-301-50	
AC-HA000825	PL18X-301-70	
AC-HA000826	PL18Y-301-70	
AC-HA000827	PL18U-301-70	
AC-HA000828	PL18V-301-70	19.5±0.5
AC-HA000829	PL18W-301-70	
AC-HA001285	PL18T-301-70	

P/N	Model NO.	Accepted Wire (
AC-HA000830	PL18X-300-35	
AC-HA000831	PL18Y-300-35	
AC-HA000832	PL18U-300-35	
AC-HA000833	PL18V-300-35	14.5±0.5
AC-HA000834	PL18W-300-35	
AC-HA001286	PL18T-300-35	
AC-HA000835	PL18X-300-50	
AC-HA000836	PL18Y-300-50	
AC-HA000837	PL18U-300-50	
AC-HA000838	PL18V-300-50	17.0±0.5
AC-HA000839	PL18W-300-50	
AC-HA001287	PL18T-300-50	
AC-HA000840	PL18X-300-70	
AC-HA000841	PL18Y-300-70	
AC-HA000842	PL18U-300-70	
AC-HA000843	PL18V-300-70	19.5±0.5
AC-HA000844	PL18W-300-70	
AC-HA001288	PL18T-300-70	



规格参数(Spec.):

1. 工作温度 Operating temperature: -40° C~+125° C.
2. 额定电流 Current rating (Connector Only): 300 A.
3. 额定电压 Operating voltage: 1000 VDC.
4. 耐电压 Dielectric withstanding voltage: 5000 VDC.
5. 防护等级 Protection class: IP67 & IP2X.
6. 电磁屏蔽 Shielding.
7. 机械寿命 Mating cycle: 50 Min.
8. 带自动二次锁扣 Automatic secondary lock.
9. 带高压互锁 Electrical interlock (HWLL).
10. 配对插座 Mating receptacle: See drawing "PL100-300"

REV/ZONE	ECO	DESCRIPTION	DATE	BY	APPR
1	---	INITIAL RELEASE	12/04/13	RW	EC
A	---	Add P/N List	06/20/14	RW	EC
B	---	Change Spec.	09/10/14	RW	EC
C	---	Change The Color of Press Key, Add New P/N	03/03/15	RW	EC
D	---	Add Touch Proof Pin & New P/N, Change DWG NO.05/05/15		RW	EC



Amphenol Technical Products International GZ

签名 SIGNATURE	日期 DATE	第三版更改 THIRD MARK MODIFICATION	页码 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	PART NAME
制图 DRAWN	12/04/13		1 of 1	A3	D		Powerlock 10mm IP67 Plug Assy
审核 CHECKED	12/04/13	UNLESS OTHERWISE SPECIFIED					P18-300
批准 APPROVAL	12/04/13	1) All dimensions are in metric(mm).					NEW NO.
		2) Tolerances are as follows:					PL18-300
		0 Pl. DEC ±1.00					PL18T-300-35
		1 Pl. DEC ±0.50					PL18T-300-50
		2 Pl. DEC ±0.20					PL18T-300-70
		Angles ±1°					PL18T-300-70
							PL18T-300-70

单击下面可查看定价，库存，交付和生命周期等信息

[>>Amphenol\(安费诺\)](#)