



REV	ECO	
A3	-	




- 31.3 -



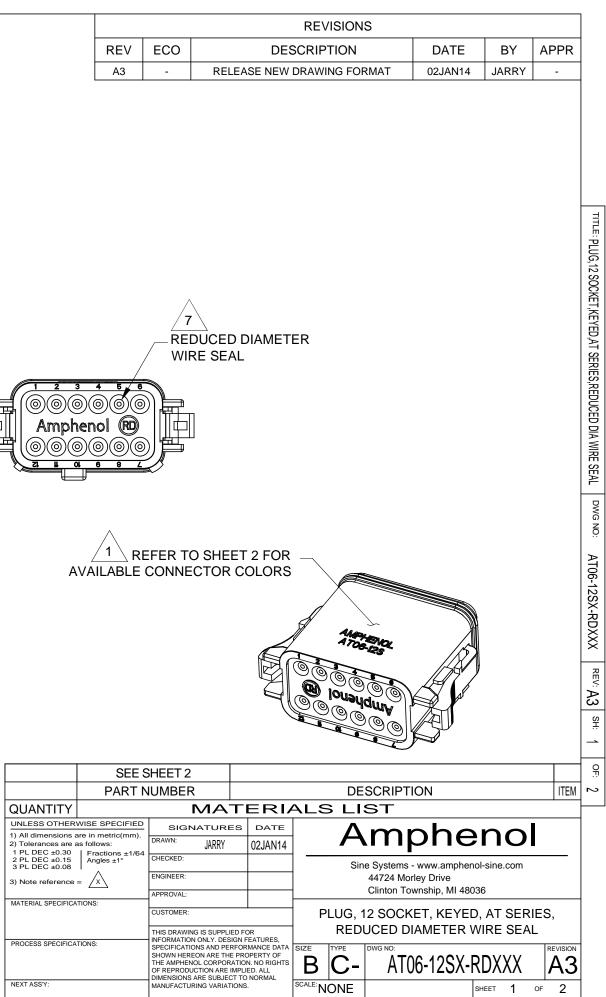

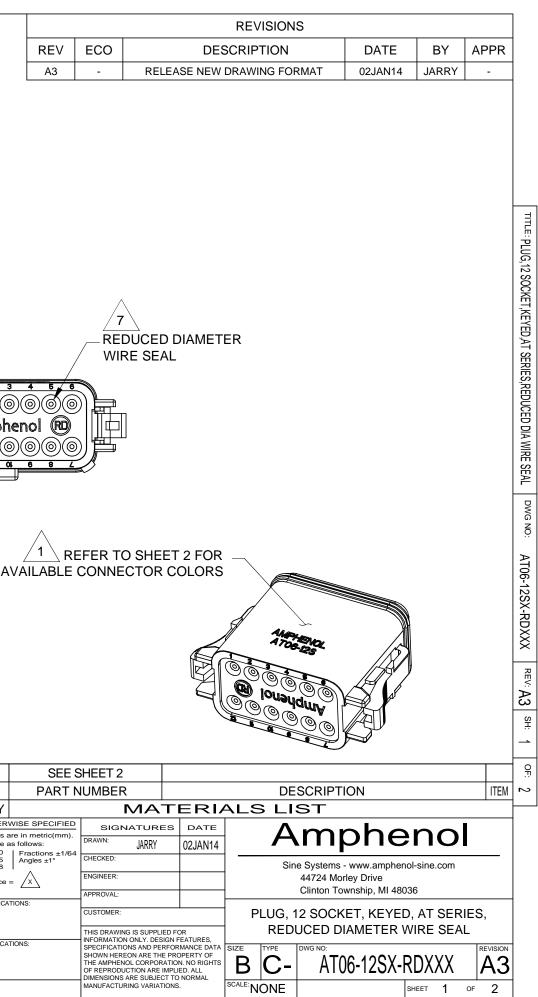

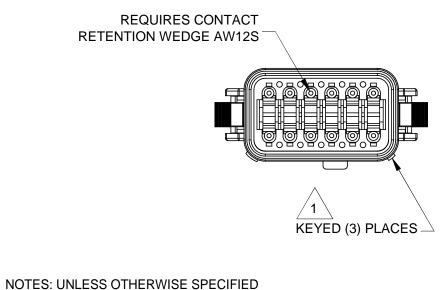

/1ackslashSEE SHEET 2 FOR KEY ARRANGEMENTS AND COLORS.

- 2. MATERIAL: HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER
- 3. MODIFICATIONS: REDUCED DIAMETER WIRE SEAL


4. SPECIFICATIONS:

- 4.1 CURRENT RATING: 13 AMPS
- 4.2 OPERATING TEMPERATURE: -55°C TO +125°C
- 4.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 4.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
- 4.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
- 4.6 MATING CYCLE DURABILITY: 100 CYCLES
- 4.7 RoHS COMPLIANT
- 5. MATING PART: AT04-12PX* RECEPTACLE (X = A,B,C,D KEYS; * = MODIFICATIONS AND COLORS)
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

Δ	CONTACT			~ - • •		
/ / \	CONTACT	SIZE AND	REAR	SEAL	WIRE	RANGE:


CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	1.35 mm (.053 in)	3.05 mm (.120 in)	14 - 20 AWG

P/N AT06-12SA-RD01 KEY-A CONFIGURATION STANDARD COLOR: GREY

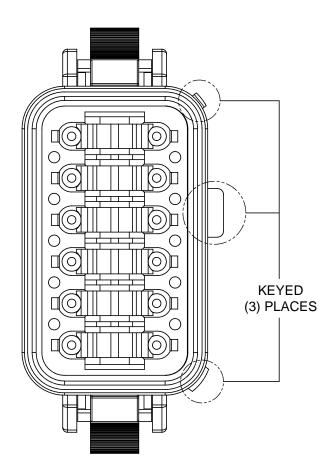


KEY-A CONFIGURATION		
COLOR PART NUMBER		
* GREY	AT06-12SA-RD01	
BLACK	AT06-12SA-RDBLK	
GREEN	AT06-12SA-RDGRN	
BROWN	AT06-12SA-RDBRN	

P/N AT06-12SB-RD01 KEY-B CONFIGURATION STANDARD COLOR: BLACK

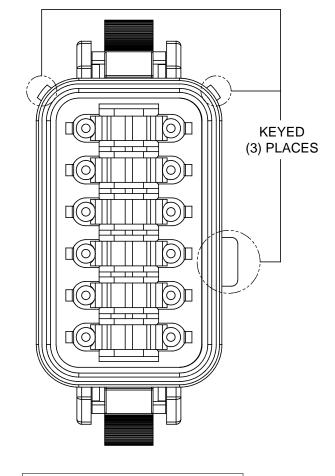

KEY-B (KEY-B CONFIGURATION		
COLOR	COLOR PART NUMBER		
GREY	AT06-12SB-RDGRY		
* BLACK AT06-12SB-RD01			
GREEN	AT06-12SB-RDGRN		
BROWN	AT06-12SB-RDBRN		

P/N AT06-12SC-RD01 KEY-C CONFIGURATION STANDARD COLOR: GREEN

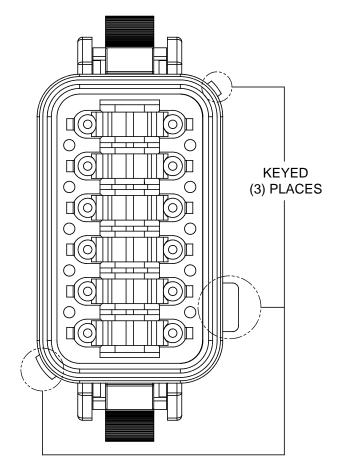


KEY-C CONFIGURATION		
COLOR PART NUMBER		
GREY	AT06-12SC-RDGRY	
BLACK AT06-12SC-RDBLK		
* GREEN	AT06-12SC-RD01	
BROWN	AT06-12SC-RDBRN	

	PART N	IUMBER
QUANTITY		
UNLESS OTHER	WISE SPECIFIED	SIGNA
 All dimensions a Tolerances are a PL DEC +0.30 		DRAWN:
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:
3) Note reference	= <u>x</u>	ENGINEER:
MATERIAL SPECIFICA	TIONS	APPROVAL:
WATERIAE OF EGITICA	nona.	CUSTOMER:
		THIS DRAWING IS
PROCESS SPECIFICA	TIONS:	INFORMATION ON SPECIFICATIONS SHOWN HEREON THE AMPHENOL C OF REPRODUCTIC DIMENSIONS ARE
NEXT ASS'Y:		MANUFACTURING

NOTE:

AN ASTERISKS (*) PLACED BEFORE THE COLOR DENOTES THE STANDARD MOLDED COLOR OF THE CONNECTORS SHOWN ABOVE.

OTHER COLORS SHOWN ARE AVAILABLE VIA SPECIAL ORDER.

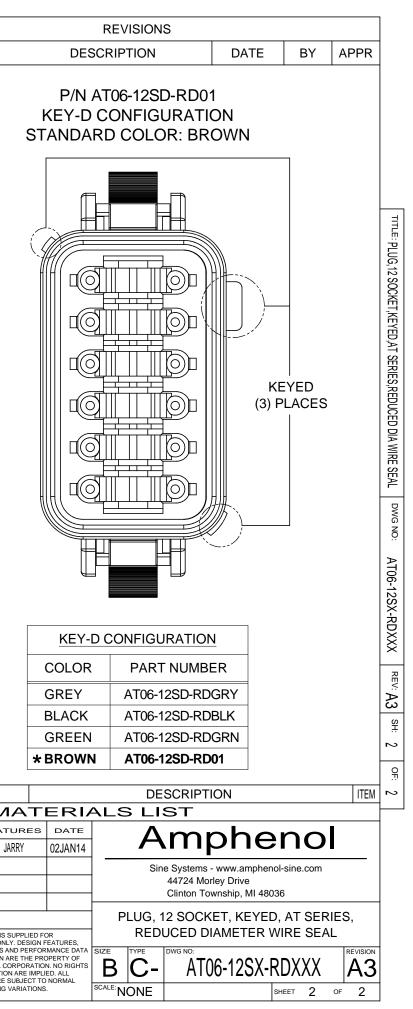

AT Series[™] - Contact Size 16 Options

Machined Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре
AT60-215-1631	Male Contact - Pin, Gold-plated 16 14 N		Machined	
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined
AT62-209-16141	Female Contact - Socket, Nickel-plated	Female Contact - Socket, Nickel-plated 16 14 N		Machined
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined
AT62-201-1631	Female Contact - Socket, Gold-plated 16 16-20 Mr		Machined	
AT60-202-16141	Male Contact - Pin, Nickel-plated 16 16-20 Ma		Machined	
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined

	Tooling - Machined Contacts		
Part	Part Number	Description	
~	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)	
37	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)	

Contact Removal Tools		
Part	Part Number	Description
	ATRT-100	Used for removal of contacts for A Series™ products
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16

	Sealing Plugs		
Part	Part Number	Description	
(C)	A114017	Sealing Plug, Size 16, White	
	A114017-SR	Sealing Plug, Size 16, SR01 Series, Black	
	AT13-217-1605	Locking Sealing Plug, Size 16, Grey	
/	AT13-217-1605-SR	Locking Sealing Plug, Size 16, SR01 Series, Red	

	Stamped & Formed Contacts, Sockets & Pins					
Part Number	Description	Size	AWG	Туре		
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed		
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	-16 Stamped & Formed		
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16 Stamped & Formed			
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed		
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	16-18 Stamped & Formed		
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed		
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed		
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	3 Stamped & Formed		
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed		
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed		
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed		
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed		
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed		
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed		
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed		
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed		

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 03/2022 单击下面可查看定价,库存,交付和生命周期等信息

>>Amphenol(安费诺)