

mat'l. code				surface <input checked="" type="checkbox"/> ISO1302 tolerance <input checked="" type="checkbox"/> ISO1101 <input checked="" type="checkbox"/> ISO406		projection		product family MOD JACK	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
M	T00202	MW	07/04/00	angle	0.X±0.3	mm		8 POS VERT. SNAP PEG	
N	N04-0102	YS	11/23/04	flat	0.XX±0.15	mm		P.C.B. III MOD JACK ASSY	
P	N06-0039	DT	3/10/06	0±2*	0.XXX±0.05	scale 2.0		dwg no sheet 1 of 2 size	
R	N08-0097	SH MIAO	09/25/08	dr	C L FENG	01/08/97		FCI	
S	ELX-N-010980	SH MIAO	3/14/12	engr	TONY CHIEN	01/08/97		90598 A4	
T	ELX-N-15908	Henry	09/23/13	chr	TONY CHIEN	01/08/97		type Product Customer Drawing	
U	ELX-N-41419	YS	7/01/21	appd	JENN TSAO	01/08/97			
sheet		revision		U	U				
index		sheet		1	2				



PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	MOUNTING EARS
90598-001 -001LF	ALL	5u" Au + high performance lubricant	Y
-002 -002LF	2,3,4,5,6,7	5u" Au + high performance lubricant	Y
-003 -003LF	ALL	5u" Au + high performance lubricant	Y
-004 -004LF	ALL	50u" / 1.27u GXT	Y
-005 -005LF	1,2,7,8	5u" Au + high performance lubricant	Y
-006 -006LF	ALL	5u" Au + high performance lubricant	N
-007 -007LF	ALL	50u" / 1.27u GXT	N
-008 -008LF	ALL	5u" Au + high performance lubricant	N
-009 -009LF	2-7	5u" Au + high performance lubricant	N
-010 -010LF	2-7	5u" Au + high performance lubricant	N
-011 -011LF	3,4,5,6	50u" / 1.27u GXT	N
-012 -012LF	ALL	15u" / 0.37u GXT	N
-013 -013LF	ALL	6u" / 0.15u GXT	Y
-014 -014LF	ALL	15u" / 0.37u GXT	Y
-015 -015LF	ALL	30u" / 0.76u GXT	Y

PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	MOUNTING EARS
90598-101 -101LF	ALL	5u" Au + high performance lubricant	Y
-102 -102LF	2,3,4,5,6,7	5u" Au + high performance lubricant	Y
-103 -103LF	ALL	5u" Au + high performance lubricant	Y
-104 -104LF	ALL	50u" / 1.27u Au	Y
-105 -105LF	1,2,7,8	5u" Au + high performance lubricant	Y
-106 -106LF	ALL	5u" Au + high performance lubricant	N

LEAD FREE PRODUCT NO.

NOTES :

- 1 P/NO WITH DASH 0XX -NOTMAL WAVE SOLDERING APPLICATION.
P/NO WITH DASH 1XX -1R REFLOW APPLICATION.
- 2 PACKAGING SPEC. BUS-14-164.
- ③ SCRATCH MARKS ACCEPTABLE ON THESE SURFACES.
- 4 JACK IS FOR 1,57/,062 THICK PCB.
- ⑤ SHOULD THE JACK NEED TO BE DISMOUNTED FROM THE PCB, PLS REMOVE JACK AS PER RECOMMENDED METHOD HEREIN. (DETAIL A)
NIPPING THE LEGS OF THE PEG TOGETHER IS DISALLOWED,
OTHERWISE LEG BREAKAGE MAY OCCUR.
- ⑥ THESE DIMENSIONS ARE TAKEN FROM THE TOP OF THE PEG.
- ⑦ MOUNTING EARS OPTIONAL. REFER TO TABLE
- 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 9 MOUNTING EARS OPTIONAL. REFER TO TABLE
- 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57mm MINIMUM THICK CIRCUIT BOARD
- 11 IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION
- ⑫ EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

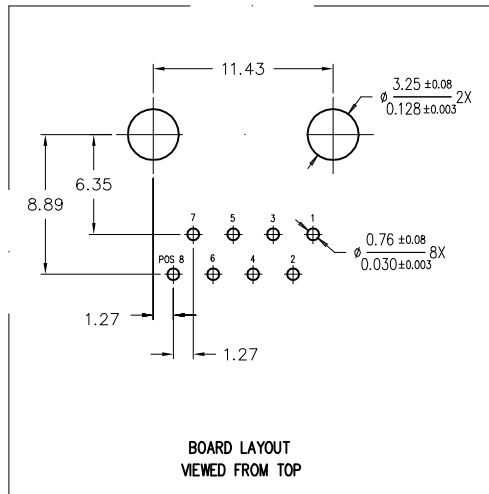

JACK DISMOUNT METHOD

DETAIL A
NOTE 5

mat'l. code				surface		tolerance		projection		product family		
				ISO1302		ISO1101 ISO406				MOD JACK		
tolerances unless otherwise specified				0.X±0.3		0.XX±0.15		mm		title		
angle				0±2°		0.XXX±0.05		scale 2.0		8 POS VERT. SNAP PEG P.C.B. III MOD JACK ASSY		
ltr	ecn no	dr	date	SH	MAO	09/25/08	dr	C L FENG	01/08/97	dwg no	sheet 2 of 2	size
M	T00202	MW	07/04/00	SH	MAO	3/14/12	engr	TONY CHIEN	01/08/97	90598 A4		
N	N04-0102	YS	11/23/04	Henry	09/23/13	chr	TONY CHIEN	01/08/97	type Product Customer Drawing			
P	N06-0039	DT	3/10/06	YS	7/01/21	appd	JENN TSAO	01/08/97				
R	N08-0097	SH	MAO	09/25/08	dr	C L FENG	01/08/97					
S	ELX-N-010980	SH	MAO	3/14/12	engr	TONY CHIEN	01/08/97					
T	ELX-N-15908	Henry	09/23/13	chr	TONY CHIEN	01/08/97						
U	ELX-N-41419	YS	7/01/21	appd	JENN TSAO	01/08/97						
sheet	revision											
index	sheet											

单击下面可查看定价，库存，交付和生命周期等信息

[>>Amphenol\(安费诺\)](#)