

0.50mm Pitch FFC/FPC – F31L Series

RIGHT ANGLE ZIF FLEX CONNECTOR

F31L series is a right angle ZIF flex connector with a front flip lock, surface mount termination, and double contact points. It features 2.55mm in height and comes in 4 to 80 contacts. This series features a cable thickness of 0.30mm and provide enhanced durability of 30 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, and medical applications.

- Easy to operate
- Strong FFC/FPC retention force makes it vibration-proof
- Enhanced contact stability
- Ensures high solderability and high durability
- USCAR-2 T3V2 qualified



TARGET MARKETS



FEATURES

- ZIF (Zero Insertion Force) mechanism
- Front flip locking function
- Double contact point
- Design against solder and flux wicking
- 4 to 80 positions available
- Lead and halogen-free

BENEFITS

- Absence of frictional mating wear results in high mating cycle life
- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures enhanced contact stability
- Ensures high solderability
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

TECHNICAL INFORMATION

MATERIAL

- Housing: LCP, Natural color (UL94V-0)
- Actuator: PA9T, Black color (UL94V-0)
- Contact: Phosphor bronze, T=0.20mm, 1~3μm Ni under plating
- Anchor-plate: Brass, T=0.20mm, 1~3μm Ni under plating, 2~4μm tin plating
- Mylar: T=0.10mm, Thermostable, Yellow color

MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 40gf ~70gf /pin
- Terminal Retention Force: 100gf/terminal min.
- Fixed Plate Retention Force: 100gf/plate min.
- Durability: 30 mating cycles

ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: 30mΩ max.
- Insulation Resistance: 500MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

PACKAGING

- Tape & Reel

APPROVALS AND CERTIFICATIONS

- UL File Number: E106764
- RoHS compliant

SPECIFICATION

- Aorora Product Specification: IS.EQC.039

ENVIRONMENTAL

- Operating Temperature Range: -40°C to +125°C

TARGET MARKETS/APPLICATIONS



Car Multimedia
Car Navigation
Dashboard
PND



Base Station
Power
Switches



Notebook
Tablets
Wearables
Gaming
DSC
LCD & PDP TV



Router
Server
ODD
HDD





Sensing Element
Monitoring Camera
Human Machine Interface
Industrial PC
Robotics



Ultrasonic
Patient Monitor
MRI
CT
Infusion Pump

PART NUMBER SELECTOR

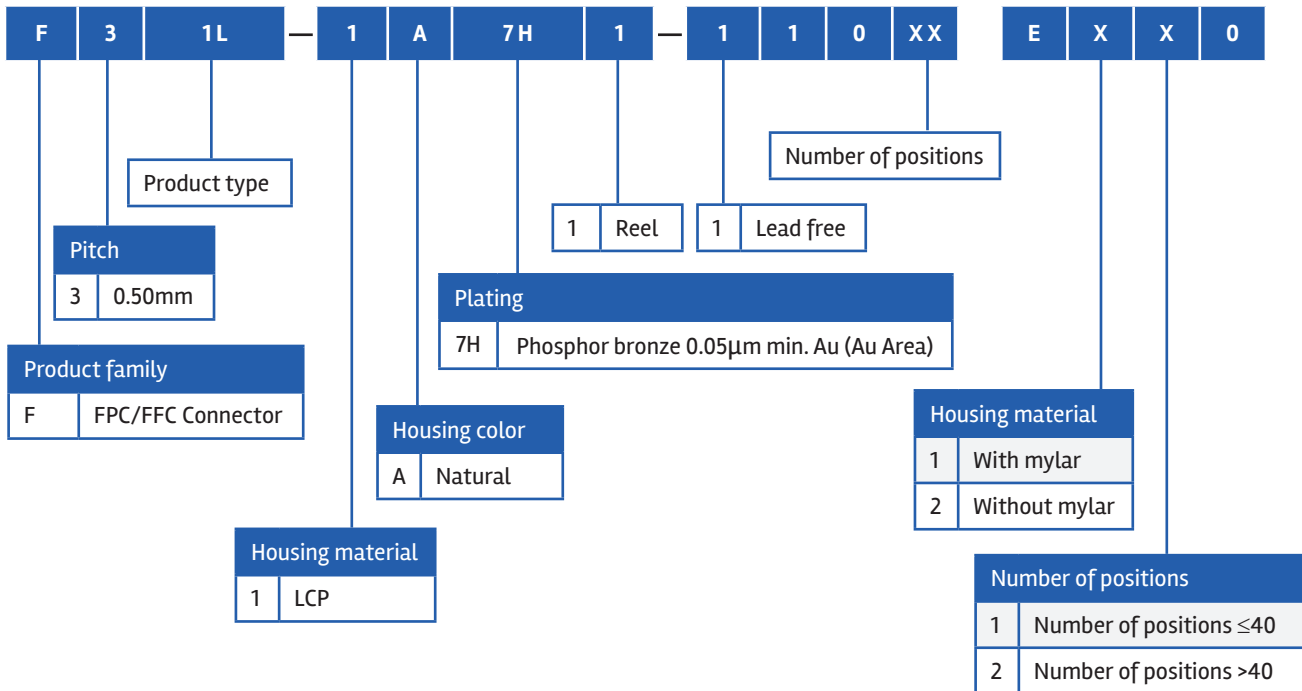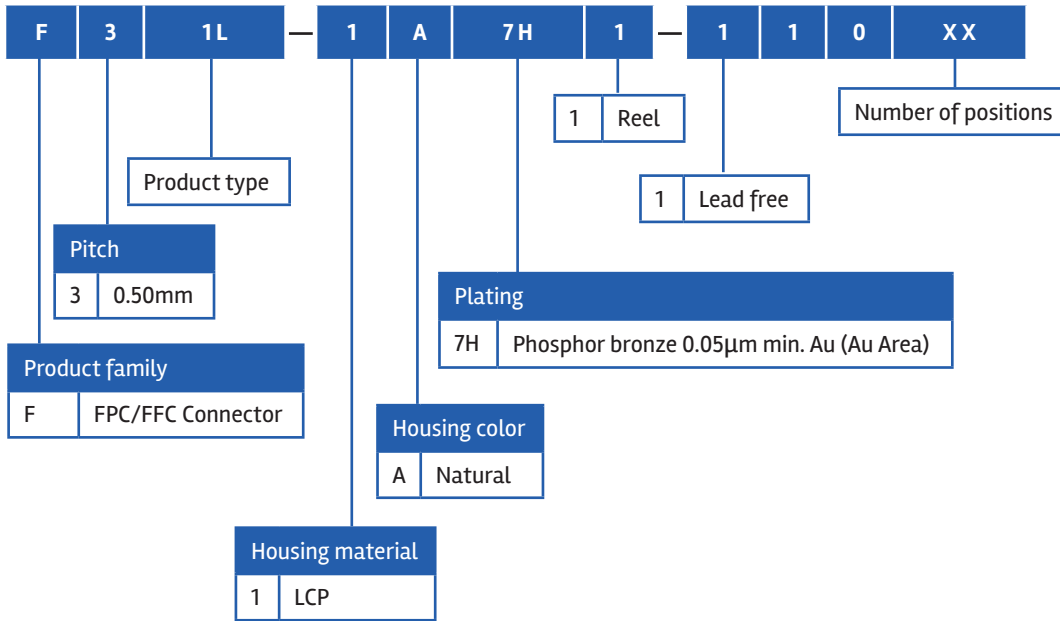

单击下面可查看定价，库存，交付和生命周期等信息

[>>Amphenol\(安费诺\)](#)