

General Description



- Latest AlphaIGBT (α IGBT) technology
- 650V breakdown voltage
- High efficient turn-on di/dt controllability
- Very high switching speed
- Low turn-off switching loss and softness
- Very good EMI behavior
- Short-circuit ruggedness

Applications

- Power factor correction
- UPS & Solar Inverters
- Very High Switching Frequency Applications
- Welding Machines

Product Summary

| | |
|--|------|
| V_{CE} | 650V |
| I_C ($T_C=100^\circ\text{C}$) | 40A |
| $V_{CE(sat)}$ ($T_J=25^\circ\text{C}$) | 1.9V |

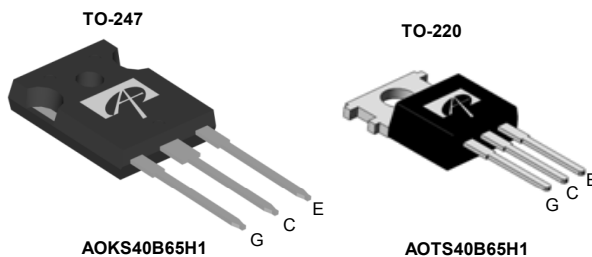

| Orderable Part Number | Package Type | Form | Minimum Order Quantity |
|-----------------------|--------------|------|------------------------|
| AOKS40B65H1 | TO247 | Tube | 240 |
| AOTS40B65H1 | TO220 | Tube | 1000 |

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | AOKS40B65H1/AOTS40B65H1 | Units |
|---|----------------|-------------------------|------------------|
| Collector-Emitter Voltage | V_{CE} | 650 | V |
| Gate-Emitter Voltage | V_{GE} | ± 30 | V |
| Continuous Collector Current | I_C | $T_C=25^\circ\text{C}$ | 80 |
| | | $T_C=100^\circ\text{C}$ | 40 |
| Pulsed Collector Current, Limited by T_{Jmax} | I_{CM} | 120 | A |
| Turn off SOA, $V_{CE} \leq 650\text{V}$, Limited by T_{Jmax} | I_{LM} | 120 | A |
| Short circuit withstanding time ¹⁾ $V_{GE} = 15\text{V}$, $V_{CC} \leq 300\text{V}$, $T_J \leq 175^\circ\text{C}$ | t_{SC} | 5 | μs |
| Power Dissipation | P_D | $T_C=25^\circ\text{C}$ | 300 |
| | | $T_C=100^\circ\text{C}$ | 150 |
| Junction and Storage Temperature Range | T_J, T_{STG} | -55 to 175 | $^\circ\text{C}$ |
| Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds | T_L | 300 | $^\circ\text{C}$ |

Thermal Characteristics

| Parameter | Symbol | AOKS40B65H1/AOTS40B65H1 | Units |
|-------------------------------|-----------------|-------------------------|--------------------|
| Maximum Junction-to-Ambient | $R_{\theta JA}$ | 40 | $^\circ\text{C/W}$ |
| Maximum IGBT Junction-to-Case | $R_{\theta JC}$ | 0.5 | $^\circ\text{C/W}$ |

1) Allowed number of short circuits: <1000; time between short circuits: >1s.

Electrical Characteristics (T_J=25°C unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|--|--------------------------------------|---|-------------------|------|-----------|----------|---------|
| STATIC PARAMETERS | | | | | | | |
| BV_{CES} | Collector-Emitter Breakdown Voltage | $I_C=1mA, V_{GE}=0V, T_J=25^\circ C$ | 650 | - | - | V | |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $V_{GE}=15V, I_C=40A$ | $T_J=25^\circ C$ | - | 1.9 | 2.4 | V |
| | | | $T_J=125^\circ C$ | - | 2.36 | - | |
| | | | $T_J=175^\circ C$ | - | 2.63 | - | |
| $V_{GE(th)}$ | Gate-Emitter Threshold Voltage | $V_{CE}=5V, I_C=1mA$ | - | 4.9 | - | V | |
| I_{CES} | Zero Gate Voltage Collector Current | $V_{CE}=650V, V_{GE}=0V$ | $T_J=25^\circ C$ | - | - | 10 | μA |
| | | | $T_J=125^\circ C$ | - | - | 500 | |
| | | | $T_J=175^\circ C$ | - | - | 10000 | |
| I_{GES} | Gate-Emitter leakage current | $V_{CE}=0V, V_{GE}=\pm 30V$ | - | - | ± 100 | nA | |
| g_{FS} | Forward Transconductance | $V_{CE}=20V, I_C=40A$ | - | 30 | - | S | |
| DYNAMIC PARAMETERS | | | | | | | |
| C_{ies} | Input Capacitance | $V_{GE}=0V, V_{CC}=25V, f=1MHz$ | - | 1789 | - | pF | |
| C_{oes} | Output Capacitance | | - | 129 | - | pF | |
| C_{res} | Reverse Transfer Capacitance | | - | 64 | - | pF | |
| Q_g | Total Gate Charge | $V_{GE}=15V, V_{CC}=520V, I_C=40A$ | - | 63 | - | nC | |
| Q_{ge} | Gate to Emitter Charge | | - | 18 | - | nC | |
| Q_{gc} | Gate to Collector Charge | | - | 25 | - | nC | |
| $I_{C(SC)}$ | Short circuit collector current | $V_{GE}=15V, V_{CC}=300V,$ $t_{sc} \leq 5\mu s, T_J \leq 175^\circ C$ | - | 256 | - | A | |
| R_g | Gate resistance | $V_{GE}=0V, V_{CC}=0V, f=1MHz$ | - | 14 | - | Ω | |
| SWITCHING PARAMETERS, (Load Inductive, T_J=25°C) | | | | | | | |
| $t_{D(on)}$ | Turn-On Delay Time | $T_J=25^\circ C$ $V_{GE}=15V, V_{CC}=400V, I_C=40A,$ $R_G=7.5\Omega$ | - | 41 | - | ns | |
| t_r | Turn-On Rise Time | | - | 36 | - | ns | |
| $t_{D(off)}$ | Turn-Off Delay Time | | - | 130 | - | ns | |
| t_f | Turn-Off Fall Time | | - | 14 | - | ns | |
| E_{on} | Turn-On Energy | | - | 1.27 | - | mJ | |
| E_{off} | Turn-Off Energy | | - | 0.46 | - | mJ | |
| E_{total} | Total Switching Energy | | - | 1.73 | - | mJ | |
| SWITCHING PARAMETERS, (Load Inductive, T_J=175°C) | | | | | | | |
| $t_{D(on)}$ | Turn-On Delay Time | $T_J=175^\circ C$ $V_{GE}=15V, V_{CC}=400V, I_C=40A,$ $R_G=7.5\Omega$ | - | 38 | - | ns | |
| t_r | Turn-On Rise Time | | - | 44 | - | ns | |
| $t_{D(off)}$ | Turn-Off Delay Time | | - | 155 | - | ns | |
| t_f | Turn-Off Fall Time | | - | 18 | - | ns | |
| E_{on} | Turn-On Energy | | - | 1.35 | - | mJ | |
| E_{off} | Turn-Off Energy | | - | 0.8 | - | mJ | |
| E_{total} | Total Switching Energy | | - | 2.15 | - | mJ | |

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

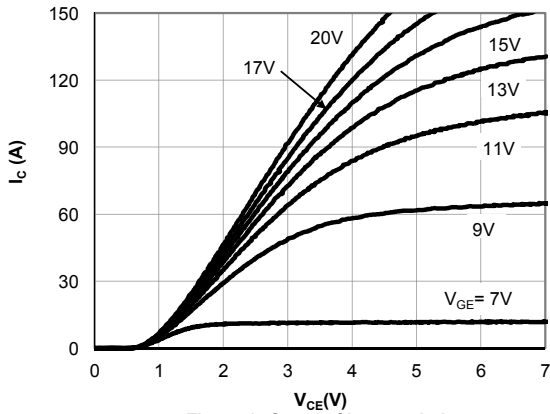


Figure 1: Output Characteristic
($T_j=25^\circ\text{C}$)

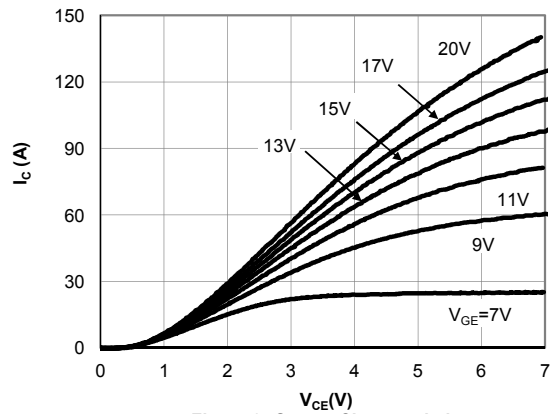


Figure 2: Output Characteristic
($T_j=175^\circ\text{C}$)

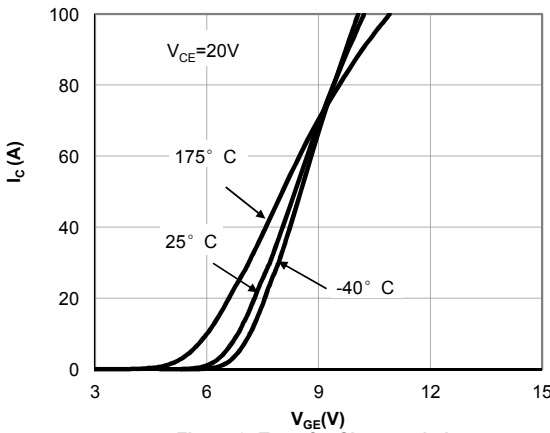


Figure 3: Transfer Characteristic

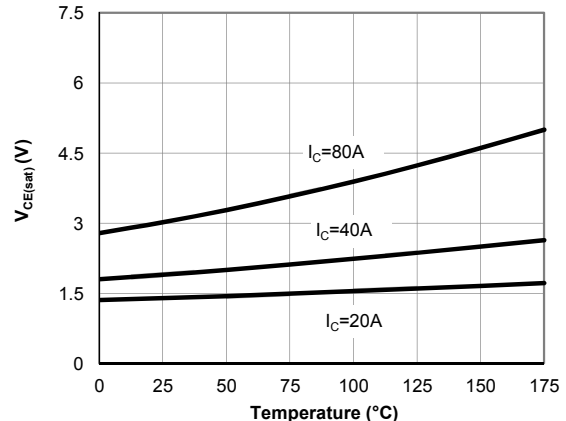


Figure 4: Collector-Emitter Saturation Voltage vs. Junction Temperature

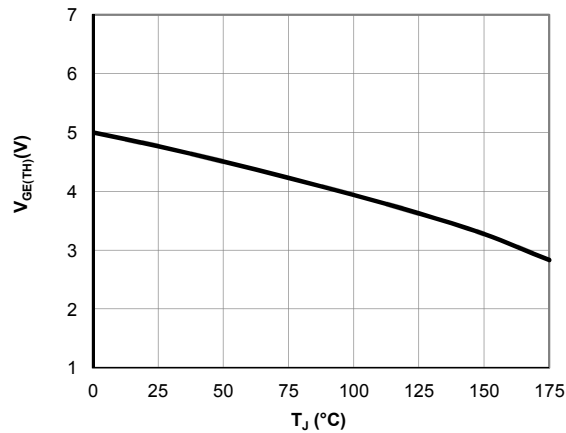


Figure 5: $V_{GE(TH)}$ vs. T_j

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

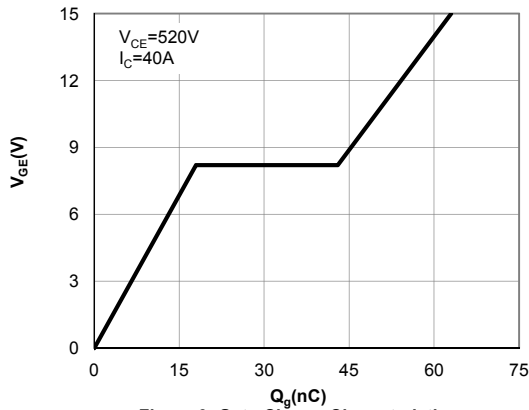


Figure 6: Gate-Charge Characteristics

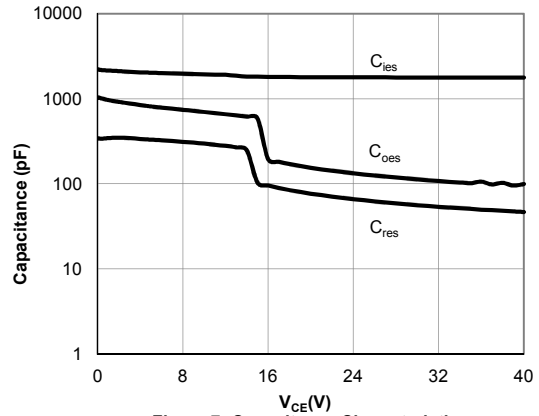


Figure 7: Capacitance Characteristic

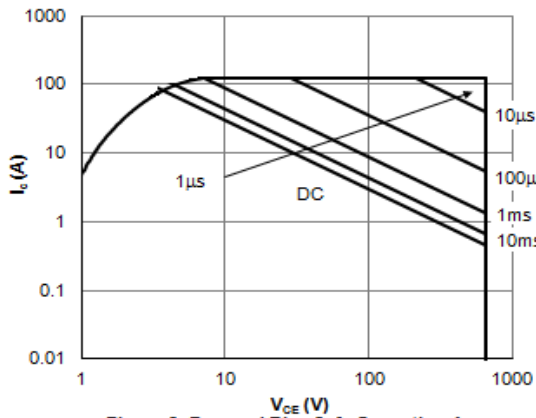


Figure 8: Forward Bias Safe Operating Area
($T_C=25^\circ\text{C}, V_{GE}=15\text{V}$)

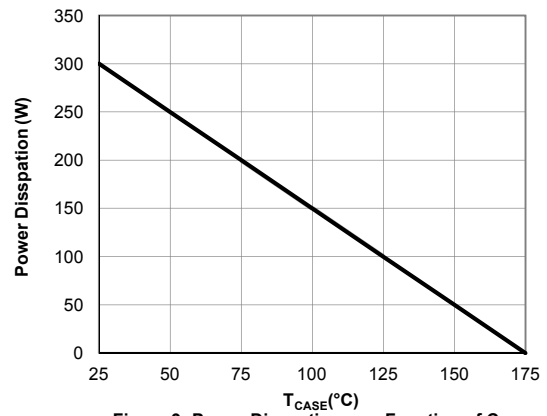


Figure 9: Power Dissipation as a Function of Case

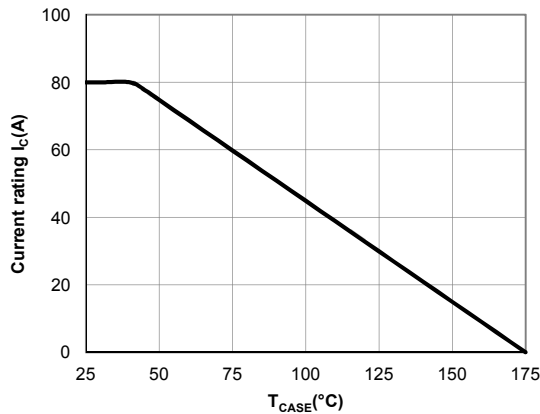


Figure 10: Current De-rating

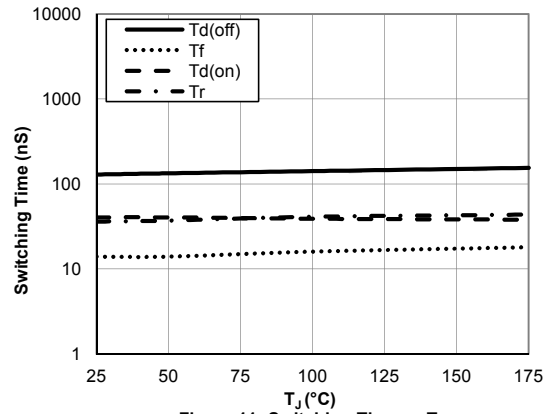


Figure 11: Switching Time vs. T_j
($V_{GE}=15\text{V}, V_{CE}=400\text{V}, I_C=40\text{A}, R_g=7.5\Omega$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

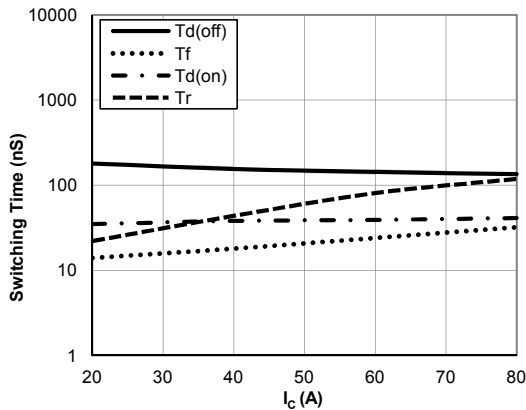


Figure 12: Switching Time vs. I_c
($T_j=175^\circ\text{C}, V_{GE}=15\text{V}, V_{CE}=400\text{V}, R_g=7.5\Omega$)

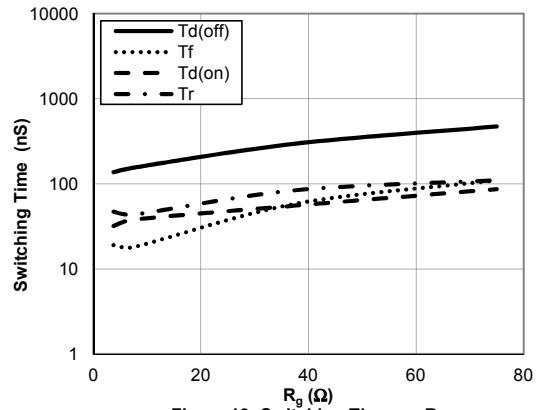


Figure 13: Switching Time vs. R_g
($T_j=175^\circ\text{C}, V_{GE}=15\text{V}, V_{CE}=400\text{V}, I_c=40\text{A}$)

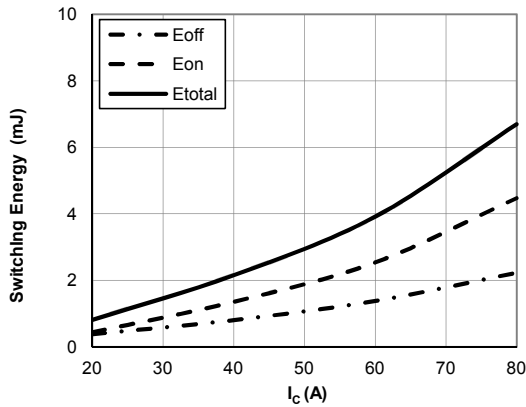


Figure 14: Switching Loss vs. I_c
($T_j=175^\circ\text{C}, V_{GE}=15\text{V}, V_{CE}=400\text{V}, R_g=7.5\Omega$)

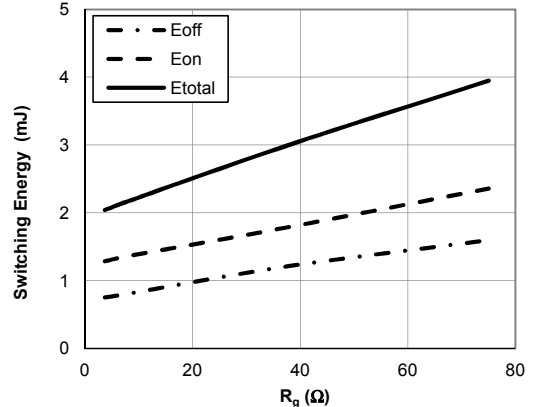


Figure 15: Switching Loss vs. R_g
($T_j=175^\circ\text{C}, V_{GE}=15\text{V}, V_{CE}=400\text{V}, I_c=40\text{A}$)

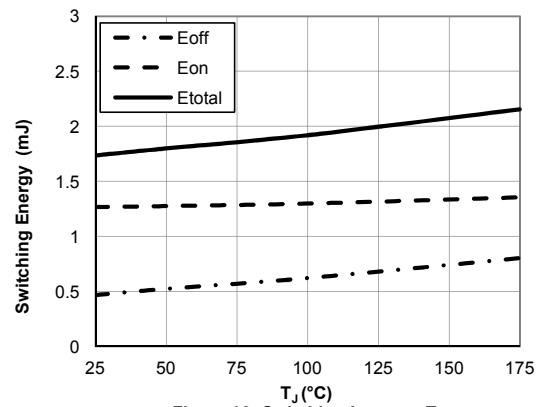


Figure 16: Switching Loss vs. T_j
($V_{GE}=15\text{V}, V_{CE}=400\text{V}, I_c=40\text{A}, R_g=7.5\Omega$)

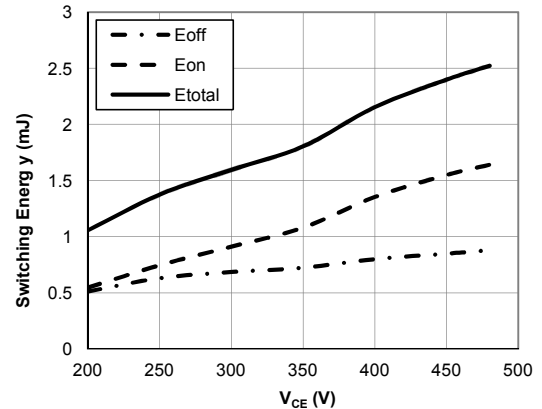


Figure 17: Switching Loss vs. V_{CE}
($T_j=175^\circ\text{C}, V_{GE}=15\text{V}, I_c=40\text{A}, R_g=7.5\Omega$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

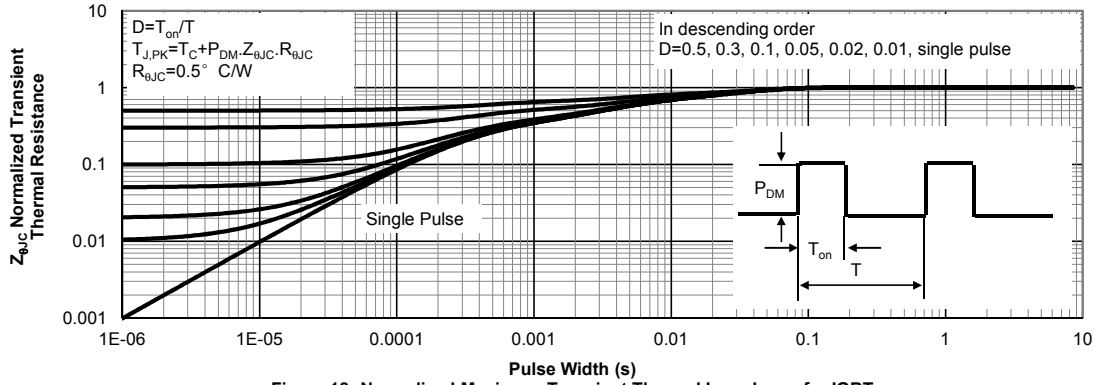


Figure 18: Normalized Maximum Transient Thermal Impedance for IGBT

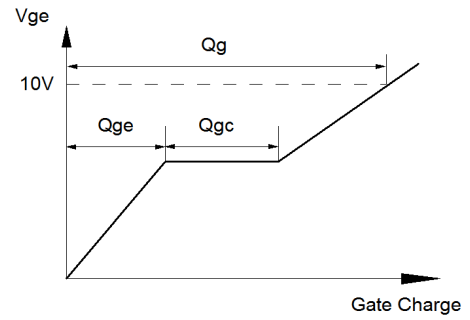
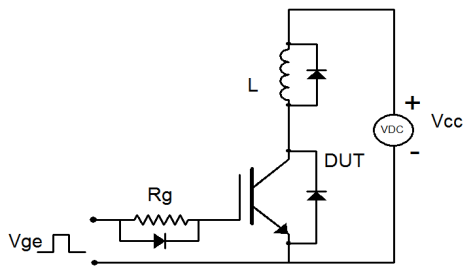


Figure A: Gate Charge Test Circuit & Waveforms

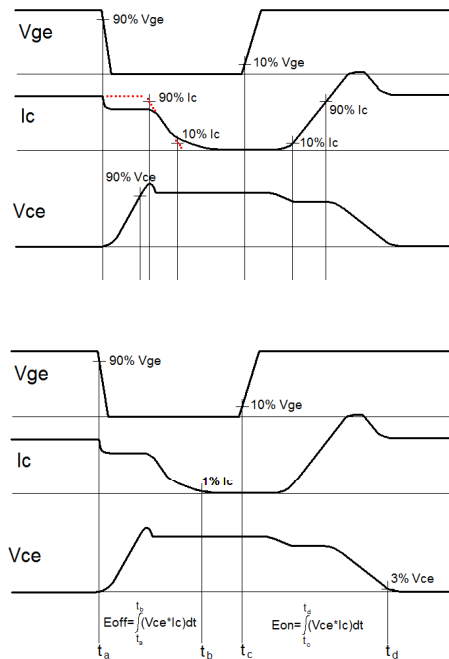
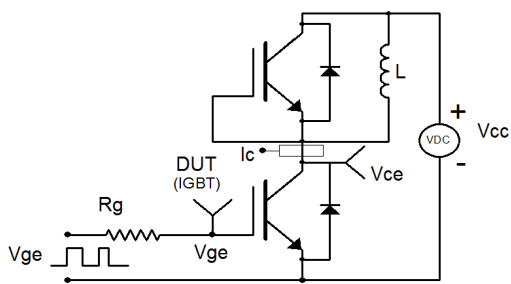


Figure B: Inductive Switching Test Circuit & Waveforms

单击下面可查看定价，库存，交付和生命周期等信息

[>>AOS\(万国半导体\)](#)