

1

2





3

4

5

6

7

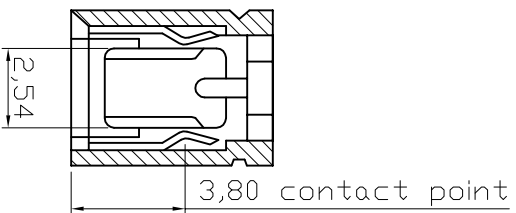

- NOTES:**
1. Insulation: 30% Glass Filled PBT, UL94V-0
  2. Contact : Brass
  3. Current Rating: 3A Max
  4. Dielectric Voltage: 1000V rms / 1 minute
  5. Insulation Resistance: 1000M ohm Min.
  6. Contact Resistance: 30m ohm Max.
  7. Operating and Storage Temperature: -40°C ~ +105°C
  8. Mating Cycles: 10 Min.

AKSPT/x - x

Color:

- GREY - Grey
- RED - Red
- BLUE - Blue
- BLACK - Black

Contact Area Plating: ④

- G: Gold Flash
- Z: Tinned

**ROHS compliant**  
Unit:mm

Scale	Free																
TOLERANCE																	
.X	±0.38	④	Update	07.06.2013	Winnie	Drawn	29.10.1995	Hellwig	Customer-No.	ASSMANN WSW-No.	AKSPT/x-X						
.XX	±0.25	④	Update	15.10.2012	Arny	Approved	07.06.2013	Winnie	Drawing-No.	ASS 0336 CO	rev04						
.XXX	±0.13	③	Update the material of contact						Replace		SHEET						
DIM	TOL	②	Update	27.07.2009	Rate												
X. °	±1°	①	Drawn	29.10.1995	Hellwig												
Angle	TOL	①															
UNIT	mm	Id.	Modification	Date	Name												

1

2

3

4

5

6

7

单击下面可查看定价，库存，交付和生命周期等信息

[>>ASSMANN WSW](#)