

A

B

C

D

E

F

G

H

A

B

C


D

E

F



G

H

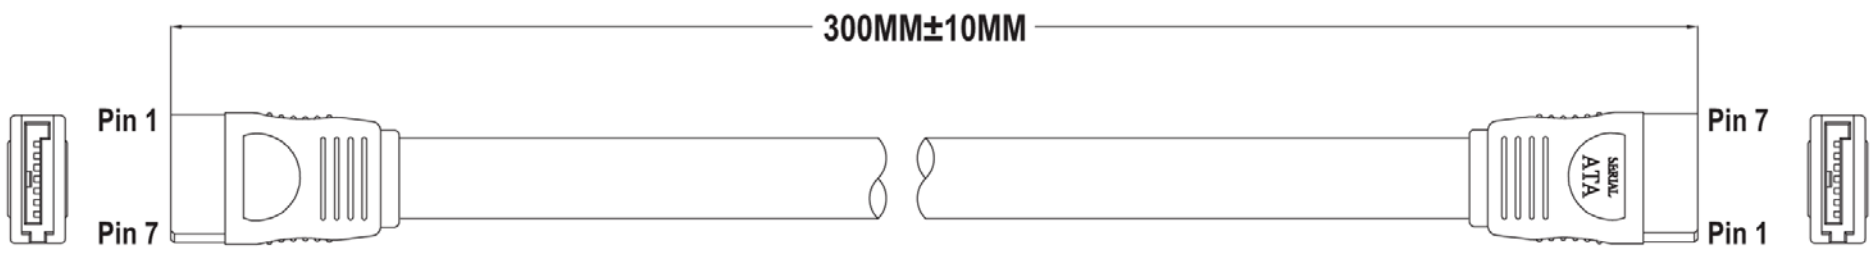

P1

P2

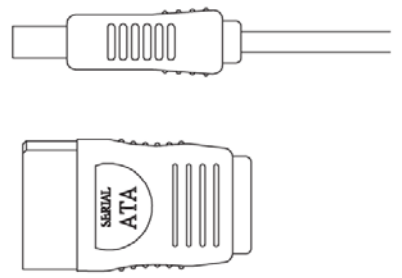

Pin Assignment

| | | |
|----|-----|----|
| P1 | | P2 |
| 1 | GND | 1 |
| 2 | | 2 |
| 3 | | 3 |
| 4 | GND | 4 |
| 5 | | 5 |
| 6 | | 6 |
| 7 | GND | 7 |

Material:

- Cable: UL2725 [26AWG(1/0.404)*2+D(1/0.32)*2+AL]*2F
- OD 2.2*7.8MM
- Jacket Red (RD-16#)
- P1 & P2 Connectors: Serial ATA 7-pin/Female Crimp Type
- Pin 15μ"
- Insulator Black
- Jacket: PVC 45P, Black
- Unplug/Plug cycles is 50 times

Electrical:

- 100% Open, Short, MisWire Test
- Contact Resistance: 1Ω Min.
- Insulation Resistance: 10MΩ Min.
- Hi-Pot 300V DC/0.1 Sec

Unit: MM±0.25MM



| | | | | | | |
|-----------|-------|--------------|------|------|----------|----------|
| Scale | 1:1 | | | | | Name |
| TOLERANCE | | | | | Drawn | 12.29.11 |
| X.X | ±0.40 | | | | Approved | |
| X.XX | ±0.25 | | | | | |
| X.XXX | ±0.15 | | | | | |
| Angle | ±3° | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | Modification | Date | Name | | |

| | |
|-------------|---|
| Item No. | AK-SATA-030 |
| Title | Serial ATA (SATA) Connection Cable - 0.30 Meter |
| Drawing No. | |
| | rev00 |
| Replace | Sheet |

单击下面可查看定价，库存，交付和生命周期等信息

[>>ASSMANN WSW](#)