


# TC Series

## Chip Tantalum Capacitors (Large Capacitance)

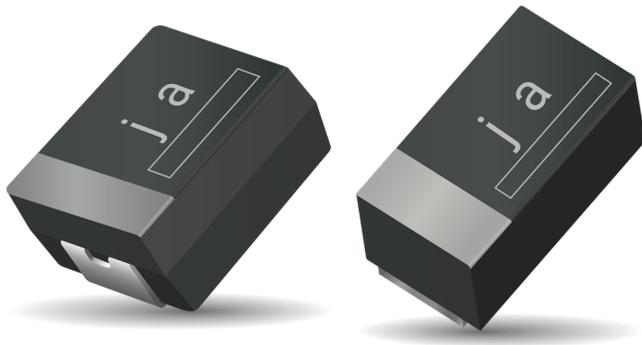

### FEATURES

- Ta-MnO<sub>2</sub> technology
- Low DCL
- Parameters stability over voltage and time
- Undertab and J-lead LF

### APPLICATIONS




- DC/DC
- Industrial
- Telecom
- IoT
- Home applications
- Sensors



LEAD-FREE  
LEAD-FREE COMPATIBLE  
COMPONENT



### MARKING

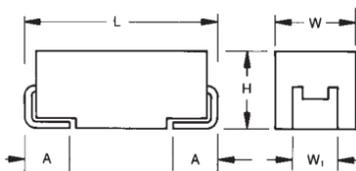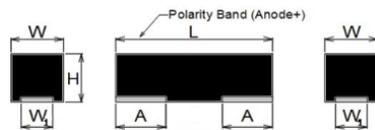

### CASE DIMENSIONS:

millimeters (inches)

Code	EIA Code	EIA Metric	L±0.10 (0.004)	W±0.10 (0.004)	H±0.10 (0.004)	W <sub>1</sub> ±0.10 (0.004)	A±0.10 (0.004)
M	0603	1608-09	1.60 (0.063)	0.85 (0.033)	0.80 (0.031)	0.55 (0.022)	0.50 (0.020)

### CASE DIMENSIONS:

millimeters (inches)

Code	EIA Code	EIA Metric	L±0.20 (0.008)	W±0.20 (0.008)	H±0.20 (0.008)	W <sub>1</sub> ±0.20 (0.008)	A±0.30 (0.012)
A	1206	3216-18	3.20 (0.126)	1.60 (0.063)	1.60 (0.063)	1.20 (0.047)	0.80 (0.031)
P	0805	2012-12	2.00 (0.079)	1.25 (0.049)	1.20 (0.047) max.	0.90 (0.035)	0.45 (0.018)

### HOW TO ORDER

**TC**

Type

**M**

Case Size  
See table  
above

**0J**

Rated DC Voltage  
0G = 4Vdc  
0J = 6.3Vdc  
1A = 10Vdc  
1C = 16Vdc  
1D = 20Vdc  
1E = 25Vdc  
1H = 50Vdc

**475**

Capacitance Code  
pF code: 1st two digits  
represent significant figures,  
3rd digit represents multiplier  
(number of zeros to follow)

**M**

Tolerance  
K = ±10%  
M = ±20%

**8R**

Packaging  
8 = Tape width  
R = Positive electrode  
on the side opposite to  
sprocket hole

-

□□□

Discrimination code

# TC Series

## Chip Tantalum Capacitors (Large Capacitance)

### TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C
Capacitance Range:	0.15µF to 100µF
Capacitance Tolerance:	±20%
Leakage Current DCL:	Please see the ratings and part number reference table below
Temperature Range:	-55°C to +125°C

Note: Conductive Polymer Capacitors are designed to operate within the limits of the environmental conditions specified for each series. If operated continuously at their maximum temperature and / or humidity limit, or beyond these limits, capacitors may exhibit a parametric shift in capacitance and increases in ESR. These changes may occur earlier if the specified environmental conditions are exceeded. Similarly, their normal operational time period will be significantly extended if their general duty cycle includes operation below maximum temperature within humidity controlled environments. Careful attention should be paid to maximum temperature with associated high humidity environments as well as voltage derating, ripple current and current surges.

Please reference the KYOCERA AVX Conductive Polymer Capacitor Guidelines for more information or contact factory for application assistance

### CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V <sub>R</sub> ) @ 85°C							Cap Code
µF	Code	4V (g)	6.3V (j)	10V (A)	16V (C)	20V(D)	25V(E)	50V(H)	
0.15	154							A	E
1.0	105			P	A,M,P	A	A,M,P		A
1.5	155				A				E
2.2	225		P	A,M,P	A,M				J
3.3	335			A,P	A		A		N
4.7	475		A,M,P	A,M,P	A	A	A		S
6.8	685		P	A	A				W
10	106	A,M,P	A,M,P	A*,M,P	A*				a
15	156		P	A					e
22	226	A,M,P	A,M,P	A	A				j
33	336	A	A,M	A					n
47	476	A	A						s
68	686	A							w
100	107	A							ā

Released ratings (\*K tolerance is also available)

Note: Voltage ratings are minimum values. KYOCERA AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

### RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Maximum Operating Temp. (°C)	DCL Max. (µA)	DF Max. (%)	Impedance @100kHz (Ω)	MSL
<b>4 Volt</b>								
TCA0G106M8R	A	10	4	125	0.5	8	4.2	1
TCM0G106M8R	M	10	4	125	0.5	20	9	1
TCPOG106M8R	P	10	4	125	0.5	20	9.3	1
TCA0G226M8R	A	22	4	125	0.9	8	3	1
TCM0G226M8R	M	22	4	125	0.9	20	9	1
TCPOG226M8R	P	22	4	125	0.9	20	7.7	1
TCA0G336M8R	A	33	4	125	1.3	10	3.5	1
TCA0G476M8R	A	47	4	125	1.9	12	3.2	1
TCA0G686M8R	A	68	4	125	2.7	18	3	1
TCA0G107M8R	A	100	4	125	4.0	30	3	1
TCA0G107M8R-02	A	100	4	125	3.8	30	4	1
<b>6.3 Volt</b>								
TCP0J225M8R	P	2.2	6.3	125	0.5	20	17.5	1
TCA0J475M8R	A	4.7	6.3	125	0.5	8	4.9	1
TCM0J475M8R	M	4.7	6.3	125	0.5	20	9	1
TCPOJ475M8R	P	4.7	6.3	125	0.5	20	11.8	1
TCP0J685M8R	P	6.8	6.3	125	0.5	20	9.3	1
TCA0J106M8R	A	10	6.3	125	0.6	8	4	1
TCM0J106M8R	M	10	6.3	125	0.6	20	9	1
TCM0J106M8R-02	M	10	6.3	125	0.6	20	9	1
TCM0J106M8R-CA2	M	10	6.3	125	0.3	20	8	1
TCPOJ106M8R	P	10	6.3	125	0.6	20	8.3	1
TCPOJ106M8R-02	P	10	6.3	125	0.1	20	6	1
TCPOJ106M8R-Y1	P	10	6.3	125	0.6	20	8.3	1
TCPOJ156M8R	P	15	6.3	125	0.9	20	7.7	1

# TC Series

## Chip Tantalum Capacitors (Large Capacitance)



### RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Maximum Operating Temp. (°C)	DCL Max. (µA)	DF Max. (%)	Impedance @100kHz (Ω)	MSL
TCA0J226M8R	A	22	6.3	125	1.4	10	3.5	1
TCM0J226M8R-CA2	M	22	6.3	125	6.9	20	8	1
TCM0J226M8R-EV2	M	22	6.3	125	13.0	30	9	1
TCM0J226M8R-V1	M	22	6.3	125	13.0	30	9	1
TCPOJ226M8R	P	22	6.3	125	1.4	25	5	1
TCPOJ226M8R-02	P	22	6.3	125	1.4	25	5	1
TCA0J336M8R	A	33	6.3	125	2.1	12	3.2	1
TCA0J336M8R-E1	A	33	6.3	125	2.1	12	3.2	1
TCM0J336M8R-V1	M	33	6.3	125	208.0	30	9	1
TCA0J476M8R	A	47	6.3	125	3.0	18	3.2	1
TCA0J476M8R-02	A	47	6.3	125	3.0	18	3.2	1
TCA0J476M8R-E1	A	47	6.3	125	3.0	18	3.2	1
<b>10 Volt</b>								
TCP1A105M8R	P	1.0	10	125	0.5	10	17.5	1
TCA1A225M8R	A	2.2	10	125	0.5	6	5.6	1
TCM1A225M8R	M	2.2	10	125	0.5	20	13.5	1
TCP1A225M8R	P	2.2	10	125	0.5	20	14.4	1
TCA1A335M8R	A	3.3	10	125	0.5	8	4.9	1
TCP1A335M8R	P	3.3	10	125	0.5	20	11.8	1
TCA1A475M8R	A	4.7	10	125	0.5	8	4.2	1
TCM1A475M8R	M	4.7	10	125	0.5	20	9	1
TCM1A475M8R-E1	M	4.7	10	125	0.5	20	9	1
TCP1A475M8R	P	4.7	10	125	0.5	20	9.3	1
TCA1A685M8R	A	6.8	10	125	0.7	8	4	1
TCA1A106*8R	A	10	10	125	1.0	8	3	1
TCM1A106M8R	M	10	10	125	10.0	20	9	1
TCM1A106M8R-02	M	10	10	125	10.0	20	9	1
TCM1A106M8R-CA2	M	10	10	125	2.0	20	8	1
TCP1A106M8R	P	10	10	125	1.0	20	7.7	1
TCP1A106M8R-02	P	10	10	125	1.0	20	7.7	1
TCA1A156M8R	A	15	10	125	1.5	10	3.5	1
TCA1A226M8R	A	22	10	125	2.2	12	3.2	1
TCA1A336M8R	A	33	10	125	3.3	8	1.7	1
<b>16 Volt</b>								
TCA1C105M8R	A	1.0	16	125	0.5	6	7	1
TCM1C105M8R	M	1.0	16	125	0.5	10	15	1
TCM1C105M8R-02	M	1.0	16	125	0.5	10	15	1
TCP1C105M8R	P	1.0	16	125	0.5	10	16.1	1
TCP1C105M8R	P	1.0	16	125	0.5	10	16.1	1
TCA1C155M8R	A	1.5	16	125	0.5	6	5.6	1
TCA1C225M8R	A	2.2	16	125	0.5	6	4.9	1
TCM1C225M8R	M	2.2	16	125	0.5	20	13.5	1
TCM1C225M8R-CA2	M	2.2	16	125	0.5	20	13.5	1
TCA1C335M8R	A	3.3	16	125	0.5	6	4.8	1
TCA1C475M8R	A	4.7	16	125	0.8	6	3.9	1
TCA1C685M8R	A	6.8	16	125	1.1	6	3.8	1
TCA1C106*8R	A	10	16	125	1.6	8	3.5	1
TCA1C106K8R-02	A	10	16	125	1.6	8	3.5	1
TCA1C106M8R-02	A	10	16	125	1.3	8	2.6	1
TCA1C226M8R	A	22	16	125	3.5	30	2.3	1
<b>20 Volt</b>								
TCA1D105M8R	A	1.0	20	125	0.5	6	7	1
TCA1D475M8R	A	4.7	20	125	0.9	6	3.9	1
<b>25 Volt</b>								
TCA1E105M8R	A	1.0	25	125	0.5	6	7	1
TCM1E105M8R	M	1.0	25	125	0.5	10	10	1
TCP1E105M8R	P	1.0	25	125	0.6	20	9.3	1
TCA1E335M8R	A	3.3	25	125	0.8	6	4.8	1
TCA1E475M8R	A	4.7	25	125	1.2	8	3.4	1
<b>50 Volt</b>								
TCA1H154M8R	A	0.15	50	125	0.5	4	15	1

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.  
All technical data relates to an ambient temperature of +25C.

Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 1.5 volts.  
DCL is measured at rated voltage after 5 minutes.  
Impedance allowed to move up to 1.25 times catalog limit post mounting.

NOTE: KYOCERA AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

# TC Series

## Chip Tantalum Capacitors (Large Capacitance)

### QUALIFICATION TABLE


TEST	TC series (Temperature range -55°C to +125°C)						
	Condition			Characteristics			
Endurance	Apply rated voltage (Ur) at 85°C for 1000hrs (for M and P case) 2000hrs (for A case) through a serial resistance of $\leq 3.0\Omega$ . Stabilize at room temperature for 24 hours before measuring.			Visual examination	no visible damage		
				DCL	2x initial limit		
				$\Delta C/C$	within $\pm 30\%$ of initial value (M case), $\pm 20\%$ (A,P case)		
				DF	2x initial limit		
Humidity	Store at $60\pm 2^\circ\text{C}$ , 90-95% relative humidity for 500+ 12/0 hours. Stabilize at room temperature and humidity for 24 hours before measuring.			Visual examination	no visible damage		
				DCL	2x initial limit		
				$\Delta C/C$	within $\pm 30\%$ of initial value (M case), $\pm 20\%$ (A,P case)		
				DF	2x initial limit		
Temperature Stability	Step	Temperature $^\circ\text{C}$	Duration(min)				
	1	-55	15				
	2	+85	15				
	3	+125	15				
					DCL	n/a	10xIL*
				$\Delta C/C$	0/-30%	+15/-5%	+20/-5%
				DF	IL*	IL*	IL*
Surge Voltage	Apply 1.3x rated voltage (Ur) at $85\pm 2^\circ\text{C}$ for 1000 cycles, 300sec charge and 30sec discharge resistance 1000 $\Omega$ .			Visual examination	no visible damage		
				DCL	2x initial limit		
				$\Delta C/C$	$\pm 20\%$ of initial limit		
				DF	2x initial limit		
Vibration	4.17 JIS C 5101-1 Frequency: 10 to 55 to 10Hz/min. Amplitude: 1.5mm Time: 2hours each in X and Y directions			Visual examination	no visible damage		
				DCL	initial limit		
				$\Delta C/C$	within $\pm 5\%$ of initial value		
				DF	initial limit		

\*Initial Limit

For use outside of recommended conditions and special request, please contact KYOCERA AVX.

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.


### PACKAGING SPECIFICATIONS

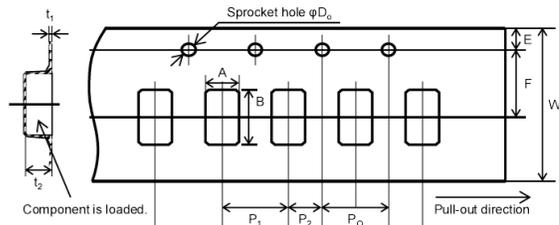

Unit (mm)

Case	A $\pm 0.10$	B $\pm 0.10$	W $\pm 0.20$	E $\pm 0.10$	F $\pm 0.05$	P1 $\pm 0.10$	P2 $\pm 0.05$	PO $\pm 0.10$	DO+0.10/0	t1 $\pm 0.05$	t2 $\pm 0.10$	Standard packaging quantity
A	1.90	3.50	8.00	1.75	3.50	4.00	2.00	4.00	$\phi 1.50$	0.25	1.90	2,000 pcs
M	1.00	1.85	8.00	1.75	3.50	4.00	2.00	4.00	$\phi 1.50$	0.20	1.00	4,000 pcs
P	1.55	2.30	8.00	1.75	3.50	4.00	2.00	4.00	$\phi 1.55\pm 0.05$	0.25	1.32	3,000 pcs

### REEL DIMENSIONS

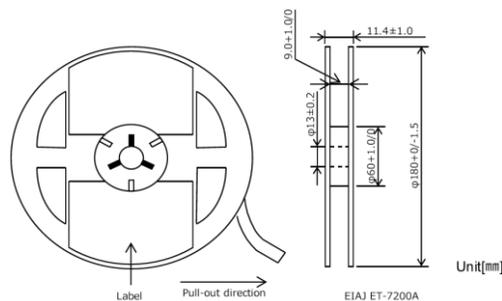

单击下面可查看定价，库存，交付和生命周期等信息

[>>AVX](#)