


# COG (NP0) Dielectric

## General Specifications

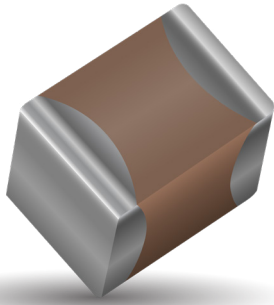

COG (NP0) is the most popular formulation of the "temperature-compensating," EIA Class I ceramic materials. Modern COG (NP0) formulations contain neodymium, samarium and other rare earth oxides.







COG (NP0) ceramics offer one of the most stable capacitor dielectrics available. Capacitance change with temperature is  $0 \pm 30 \text{ ppm}/^\circ\text{C}$  which is less than  $\pm 0.3\%$  C from  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ . Capacitance drift or hysteresis for COG (NP0) ceramics is negligible at less than  $\pm 0.05\%$  versus up to  $\pm 2\%$  for films. Typical capacitance change with life is less than  $\pm 0.1\%$  for COG (NP0), one-fifth that shown by most other dielectrics. COG (NP0) formulations show no aging characteristics.

### PART NUMBER (SEE PAGE 4 FOR COMPLETE PART NUMBER EXPLANATION)




|                          |  |                                    |  |  |   |  |   |   |
|--------------------------|--|------------------------------------|--|--|---|--|---|---|
| <b>0805</b>              | <b>5</b>   | <b>A</b>                           | <b>101</b>   | <b>J</b>   | <b>A</b>                                  | <b>T</b>   | <b>2</b>  | <b>A</b>                                |
| <b>Size</b><br>(L" x W") | <b>Voltage</b><br>6.3V = 6<br>10V = Z<br>16V = Y<br>25V = 3<br>50V = 5<br>100V = 1<br>200V = 2<br>250V = V<br>500V = 7 | <b>Dielectric</b><br>COG (NP0) = A | <b>Capacitance Code (In pF)</b><br>2 Sig. Digits + Number of Zeros | <b>Capacitance Tolerance</b><br>B = $\pm 10 \text{ pF}$ ( $< 10 \text{ pF}$ )<br>C = $\pm 25 \text{ pF}$ ( $< 10 \text{ pF}$ )<br>D = $\pm 50 \text{ pF}$ ( $< 10 \text{ pF}$ )<br>F = $\pm 1\%$ ( $\geq 10 \text{ pF}$ )<br>G = $\pm 2\%$ ( $\geq 10 \text{ pF}$ )<br>J = $\pm 5\%$<br>K = $\pm 10\%$ | <b>Failure Rate</b><br>A = Not Applicable | <b>Terminations</b><br>T = Plated Ni and Sn  | <b>Packaging</b><br>2 = 7" Reel<br>4 = 13" Reel<br>U = 4mm TR (01005) | <b>Special Code</b><br>A = Std. Product |
|                          |  |                                    |  |  |   | <b>Contact Factory For</b><br>1 = Pd/Ag Term<br>7 = Gold Plated<br><b>NOT RoHS COMPLIANT</b> |   | <b>Contact Factory For Multiples</b>    |

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers. Contact factory for non-specified capacitance values.

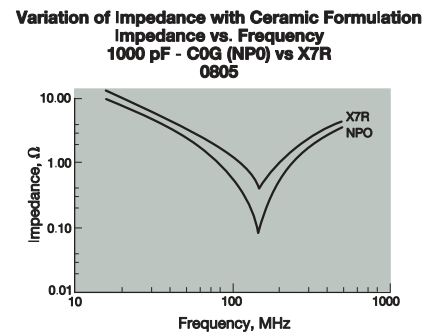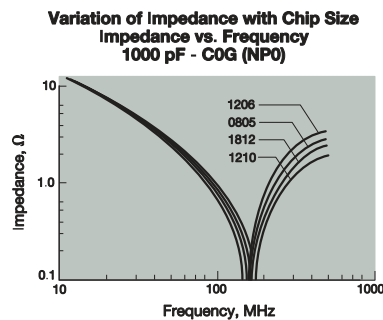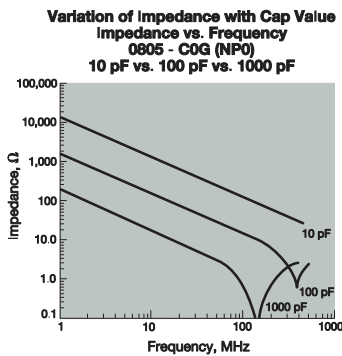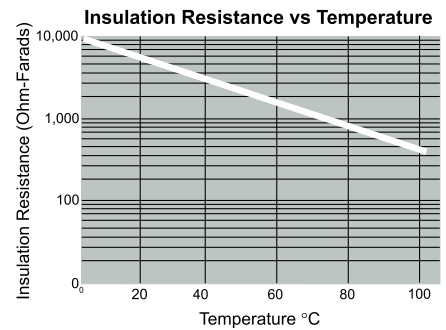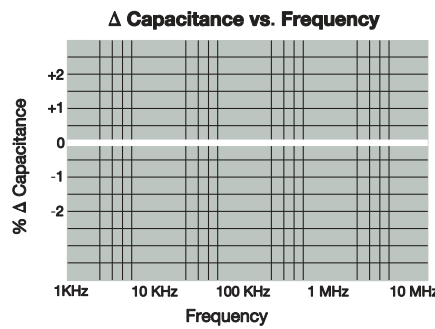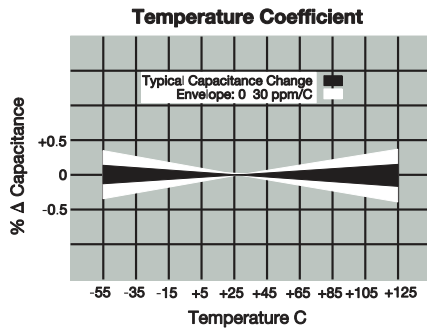

# COG (NP0) Dielectric


## Specifications and Test Methods
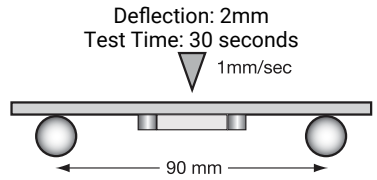
| Parameter/Test                 |                       | NP0 Specification Limits  | Measuring Conditions   |                    |
|--------------------------------|-----------------------|---|--|--------------------|
| Operating Temperature Range    |                       | -55°C to +125°C   | Temperature Cycle Chamber  |                    |
| Capacitance                    |                       | Within specified tolerance  | Freq.: 1.0 MHz $\pm$ 10% for cap $\leq$ 1000 pF<br>1.0 kHz $\pm$ 10% for cap $>$ 1000 pF<br>Voltage: 1.0Vrms $\pm$ .2V   |                    |
| Q                              |                       | $<$ 30 pF: Q $\geq$ 400+20 x Cap Value<br>$\geq$ 30 pF: Q $\geq$ 1000                                     |  |                    |
| Insulation Resistance          |                       | 100,000M $\Omega$ or 1000M $\Omega$ - $\mu$ F,<br>whichever is less                                       | Charge device with rated voltage for 60 $\pm$ 5 secs<br>@ room temp/humidity   |                    |
| Dielectric Strength            |                       | No breakdown or visual defects  | Charge device with 250% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)<br>Note: Charge device with 150% of rated voltage for 500V devices.  |                    |
| Resistance to Flexure Stresses | Appearance            | No defects  |   |                    |
|                                | Capacitance Variation | $\pm$ 5% or $\pm$ .5 pF, whichever is greater   |  |                    |
|                                | Q                     | Meets Initial Values (As Above)   |  |                    |
|                                | Insulation Resistance | $\geq$ Initial Value x 0.3  |  |                    |
| Solderability                  |                       | $\geq$ 95% of each terminal should be covered with fresh solder   | Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds   |                    |
| Resistance to Solder Heat      | Appearance            | No defects, $<$ 25% leaching of either end terminal   | Dip device in eutectic solder at 260°C for 60sec- onds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.   |                    |
|                                | Capacitance Variation | $\leq$ $\pm$ 2.5% or $\pm$ .25 pF, whichever is greater   |  |                    |
|                                | Q                     | Meets Initial Values (As Above)   |  |                    |
|                                | Insulation Resistance | Meets Initial Values (As Above)   |  |                    |
|                                | Dielectric Strength   | Meets Initial Values (As Above)   |  |                    |
| Thermal Shock                  | Appearance            | No visual defects   | Step 1: -55°C $\pm$ 2°   | 30 $\pm$ 3 minutes |
|                                | Capacitance Variation | $\leq$ $\pm$ 2.5% or $\pm$ .25 pF, whichever is greater   | Step 2: Room Temp  | $\leq$ 3 minutes   |
|                                | Q                     | Meets Initial Values (As Above)   | Step 3: +125°C $\pm$ 2°  | 30 $\pm$ 3 minutes |
|                                | Insulation Resistance | Meets Initial Values (As Above)   | Step 4: Room Temp  | $\leq$ 3 minutes   |
|                                | Dielectric Strength   | Meets Initial Values (As Above)   | Repeat for 5 cycles and measure after 24 hours at room temperature   |                    |
| Load Life                      | Appearance            | No visual defects   | Charge device with twice rated voltage in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0).<br><br>Remove from test chamber and stabilize at room temperature for 24 hours before measuring.                               |                    |
|                                | Capacitance Variation | $\leq$ $\pm$ 3.0% or $\pm$ .3 pF, whichever is greater  |  |                    |
|                                | Q<br>(C=Nominal Cap)  | $\geq$ 30 pF: Q $\geq$ 350<br>$\geq$ 10 pF, $<$ 30 pF: Q $\geq$ 275 +5C/2<br>$<$ 10 pF: Q $\geq$ 200 +10C |  |                    |
|                                | Insulation Resistance | $\geq$ Initial Value x 0.3 (See Above)  |  |                    |
|                                | Dielectric Strength   | Meets Initial Values (As Above)   |  |                    |
| Load Humidity                  | Appearance            | No visual defects   | Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied.<br><br>Remove from chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring. |                    |
|                                | Capacitance Variation | $\leq$ $\pm$ 5.0% or $\pm$ .5 pF, whichever is greater  |  |                    |
|                                | Q                     | $\geq$ 30 pF: Q $\geq$ 350<br>$\geq$ 10 pF, $<$ 30 pF: Q $\geq$ 275 +5C/2<br>$<$ 10 pF: Q $\geq$ 200 +10C |  |                    |
|                                | Insulation Resistance | $\geq$ Initial Value x 0.3 (See Above)  |  |                    |
|                                | Dielectric Strength   | Meets Initial Values (As Above)   |  |                    |

# COG (NP0) Dielectric Capacitance Range

## PREFERRED SIZES ARE SHADED

| SIZE         | 0101*                           |  |  | 0201                           |  |  | 0402                           |  |  | 0603                           |  |  |     | 0805                           |  |  |     |  | 1206                           |  |  |     |  |  |  |  |
|--------------|---------------------------------|--|--|--------------------------------|--|--|--------------------------------|--|--|--------------------------------|--|--|-----|--------------------------------|--|--|-----|--|--------------------------------|--|--|-----|--|--|--|--|
| Soldering    | Reflow Only                     |  |  | Reflow Only                    |  |  | Reflow/Wave                    |  |  | Reflow/Wave                    |  |  |     | Reflow/Wave                    |  |  |     |  | Reflow/Wave                    |  |  |     |  |  |  |  |
| Packaging    | All Paper                       |  |  | All Paper                      |  |  | All Paper                      |  |  | All Paper                      |  |  |     | Paper/Embossed                 |  |  |     |  | Paper/Embossed                 |  |  |     |  |  |  |  |
| (L) Length   | 0.40 ± 0.02<br>(0.016 ± 0.0008) |  |  | 0.60 ± 0.09<br>(0.024 ± 0.004) |  |  | 1.00 ± 0.10<br>(0.040 ± 0.004) |  |  | 1.60 ± 0.15<br>(0.063 ± 0.006) |  |  |     | 2.01 ± 0.20<br>(0.079 ± 0.008) |  |  |     |  | 3.20 ± 0.20<br>(0.126 ± 0.008) |  |  |     |  |  |  |  |
| (W) Width    | 0.20 ± 0.02<br>(0.008 ± 0.0008) |  |  | 0.30 ± 0.09<br>(0.011 ± 0.004) |  |  | 0.50 ± 0.10<br>(0.020 ± 0.004) |  |  | 0.81 ± 0.15<br>(0.032 ± 0.006) |  |  |     | 1.25 ± 0.20<br>(0.049 ± 0.008) |  |  |     |  | 1.60 ± 0.20<br>(0.063 ± 0.008) |  |  |     |  |  |  |  |
| (t) Terminal | 0.10 ± 0.04<br>(0.004 ± 0.0016) |  |  | 0.15 ± 0.05<br>(0.006 ± 0.002) |  |  | 0.25 ± 0.15<br>(0.010 ± 0.006) |  |  | 0.35 ± 0.15<br>(0.014 ± 0.006) |  |  |     | 0.50 ± 0.25<br>(0.020 ± 0.010) |  |  |     |  | 0.50 ± 0.25<br>(0.020 ± 0.010) |  |  |     |  |  |  |  |
| WVDC         | 16                              |  |  | 25                             |  |  | 50                             |  |  | 16                             |  |  |     | 25                             |  |  |     |  | 50                             |  |  |     |  |  |  |  |
| Cap (pF)     | 0.5                             |  |  | 1.0                            |  |  | 1.2                            |  |  | 1.5                            |  |  | 1.8 |                                |  |  | 2.2 |  |                                |  |  | 2.7 |  |  |  |  |
|              | 3.3                             |  |  | 3.9                            |  |  | 4.7                            |  |  | 5.6                            |  |  |     | 6.8                            |  |  |     |  | 8.2                            |  |  |     |  |  |  |  |
|              | 10                              |  |  | 12                             |  |  | 15                             |  |  | 18                             |  |  |     | 22                             |  |  |     |  | 27                             |  |  |     |  |  |  |  |
|              | 33                              |  |  | 39                             |  |  | 47                             |  |  | 56                             |  |  |     | 68                             |  |  |     |  | 82                             |  |  |     |  |  |  |  |
|              | 100                             |  |  | 120                            |  |  | 150                            |  |  | 180                            |  |  |     | 220                            |  |  |     |  | 270                            |  |  |     |  |  |  |  |
|              | 330                             |  |  | 390                            |  |  | 470                            |  |  | 560                            |  |  |     | 680                            |  |  |     |  | 750                            |  |  |     |  |  |  |  |
|              | 820                             |  |  | 1000                           |  |  | 1200                           |  |  | 1500                           |  |  |     | 1800                           |  |  |     |  | 2200                           |  |  |     |  |  |  |  |
|              | 2700                            |  |  | 3300                           |  |  | 3900                           |  |  | 4700                           |  |  |     | 5600                           |  |  |     |  | 6800                           |  |  |     |  |  |  |  |
|              | 8200                            |  |  | 0.010                          |  |  | 0.012                          |  |  | 0.015                          |  |  |     | 0.018                          |  |  |     |  | 0.022                          |  |  |     |  |  |  |  |
|              | 0.027                           |  |  | 0.033                          |  |  | 0.039                          |  |  | 0.047                          |  |  |     | 0.068                          |  |  |     |  | 0.082                          |  |  |     |  |  |  |  |
|              | 0.1                             |  |  | WVDC                           |  |  | 16                             |  |  | 25                             |  |  |     | 50                             |  |  |     |  | 100                            |  |  |     |  |  |  |  |
| SIZE         | 0101*                           |  |  | 0201                           |  |  | 0402                           |  |  | 0603                           |  |  |     | 0805                           |  |  |     |  | 1206                           |  |  |     |  |  |  |  |

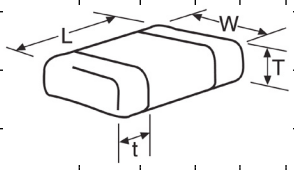


| Letter         | A               | B               | C               | E               | G               | J               | K               | M               | N               | P               | Q               | X               | Y               | Z               |  |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| Max. Thickness | 0.33<br>(0.013) | 0.22<br>(0.009) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.90<br>(0.035) | 0.94<br>(0.037) | 1.02<br>(0.040) | 1.27<br>(0.050) | 1.40<br>(0.055) | 1.52<br>(0.060) | 1.78<br>(0.070) | 2.29<br>(0.090) | 2.54<br>(0.100) | 2.79<br>(0.110) |  |
|                | PAPER           |                 |                 |                 |                 |                 | EMBOSSED        |                 |                 |                 |                 |                 |                 |                 |  |

# C0G (NP0) Dielectric Capacitance Range



## PREFERRED SIZES ARE SHADED

| SIZE         | 1210                           |    |     |     |     | 1812                           |    |     |     |     | 1825                           |     |     | 2220                           |     |     | 2225                           |     |     |
|--------------|--------------------------------|----|-----|-----|-----|--------------------------------|----|-----|-----|-----|--------------------------------|-----|-----|--------------------------------|-----|-----|--------------------------------|-----|-----|
| Soldering    | Reflow Only                    |    |     |     |     | Reflow Only                    |    |     |     |     | Reflow Only                    |     |     | Reflow Only                    |     |     | Reflow Only                    |     |     |
| Packaging    | Paper/Embossed                 |    |     |     |     | All Embossed                   |    |     |     |     | All Embossed                   |     |     | All Embossed                   |     |     | All Embossed                   |     |     |
| (L) Length   | 3.20 ± 0.20<br>(0.126 ± 0.008) |    |     |     |     | 4.50 ± 0.30<br>(0.177 ± 0.012) |    |     |     |     | 4.50 ± 0.30<br>(0.177 ± 0.012) |     |     | 5.70 ± 0.40<br>(0.225 ± 0.016) |     |     | 5.72 ± 0.25<br>(0.225 ± 0.010) |     |     |
| (W) Width    | 2.50 ± 0.20<br>(0.098 ± 0.008) |    |     |     |     | 3.20 ± 0.20<br>(0.126 ± 0.008) |    |     |     |     | 6.40 ± 0.40<br>(0.252 ± 0.016) |     |     | 5.00 ± 0.40<br>(0.197 ± 0.016) |     |     | 6.35 ± 0.25<br>(0.250 ± 0.010) |     |     |
| (t) Terminal | 0.50 ± 0.25<br>(0.020 ± 0.010) |    |     |     |     | 0.61 ± 0.36<br>(0.024 ± 0.014) |    |     |     |     | 0.61 ± 0.36<br>(0.024 ± 0.014) |     |     | 0.64 ± 0.39<br>(0.025 ± 0.015) |     |     | 0.64 ± 0.39<br>(0.025 ± 0.015) |     |     |
| WVDC         | 25                             | 50 | 100 | 200 | 500 | 25                             | 50 | 100 | 200 | 500 | 50                             | 100 | 200 | 50                             | 100 | 200 | 50                             | 100 | 200 |
| Cap (pF)     | 3.9                            |    |     |     |     |                                |    |     |     |     |                                |     |     |                                |     |     |                                |     |     |
|              | 4.7                            |    |     |     |     |                                |    |     |     |     |                                |     |     |                                |     |     |                                |     |     |
|              | 5.6                            |    |     |     |     |                                |    |     |     |     |                                |     |     |                                |     |     |                                |     |     |
|              | 6.8                            |    |     |     |     |                                |    |     |     |     |                                |     |     |                                |     |     |                                |     |     |
|              | 8.2                            |    |     |     |     |                                |    |     |     |     |                                |     |     |                                |     |     |                                |     |     |
|              | 10                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 12                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 15                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 18                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 22                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 27                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 33                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 39                             | M  | M   | M   | M   | M                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 47                             | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 56                             | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 68                             | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 82                             | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 100                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 120                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 150                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 180                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 220                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 270                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 330                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 390                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 470                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 560                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 680                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 820                            | P  | P   | P   | P   | P                              | P  | P   | P   | P   |                                |     |     |                                |     |     |                                |     |     |
|              | 1000                           | P  | P   | P   | P   | P                              | P  | P   | P   | P   | M                              | M   | M   |                                |     |     | M                              | M   | P   |
|              | 1200                           | P  | P   | P   | P   | P                              | P  | P   | P   | P   | M                              | M   | M   |                                |     |     | M                              | M   | P   |
|              | 1500                           | P  | P   | P   | P   | P                              | P  | P   | P   | P   | M                              | M   | M   |                                |     |     | M                              | M   | P   |
|              | 1800                           | P  | P   | P   | P   | P                              | P  | P   | P   | P   | M                              | M   | M   |                                |     |     | M                              | M   | P   |
|              | 2200                           | P  | P   | P   | P   | P                              | P  | P   | P   | P   | X                              | X   | M   |                                |     |     | M                              | M   | P   |
|              | 2700                           | P  | P   | P   | P   | P                              | P  | P   | P   | Q   | X                              | X   | M   |                                |     |     | M                              | M   | P   |
|              | 3300                           | P  | P   | P   | P   | P                              | P  | P   | P   | Q   | X                              | X   | X   |                                |     | X   | M                              | M   | P   |
|              | 3900                           | P  | P   | P   | P   | P                              | P  | P   | P   | Q   | X                              | X   | X   |                                |     | X   | M                              | M   | P   |
|              | 4700                           | P  | P   | P   | P   | P                              | P  | P   | P   | Y   | X                              | X   | X   |                                | X   | X   | M                              | M   | P   |
|              | 5600                           | P  | P   | P   | P   | P                              | P  | P   | P   | Y   | X                              | X   | X   |                                | X   | X   | M                              | M   | P   |
|              | 6800                           | P  | P   | P   | X   | X                              | P  | P   | Q   | Q   | Y                              | X   | X   |                                | X   | X   | M                              | M   | P   |
|              | 8200                           | P  | P   | P   | X   | X                              | P  | P   | Q   | Q   | Y                              | X   | X   |                                | X   | X   | M                              | M   | P   |
| Cap (pF)     | 0.010                          | P  | P   | X   | X   | X                              | P  | P   | Q   | Q   | Y                              | X   | X   |                                | X   | X   | M                              | M   | P   |
|              | 0.012                          | X  | X   | X   | X   | X                              | P  | P   | Q   | X   | Y                              | X   | X   |                                | X   | X   | M                              | M   | P   |
|              | 0.015                          | X  | X   | X   | Z   | Z                              | P  | P   | Q   | X   | Y                              | X   | X   |                                | X   | X   | M                              | M   | Y   |
|              | 0.018                          | X  | X   | Z   | Z   | Z                              | P  | P   | X   | X   | Y                              | X   | X   |                                | X   | X   | M                              | M   | Y   |
|              | 0.022                          | X  | X   | Z   | Z   | Z                              | P  | P   | X   | X   |                                | X   | X   |                                | X   | X   | M                              | Y   | Y   |
|              | 0.027                          | X  | Z   | Z   | Z   | Z                              | Q  | X   | X   | Z   |                                | X   | X   |                                | X   | Y   | P                              | Y   | Y   |
|              | 0.033                          | X  | Z   | Z   | Z   |                                | Q  | X   | X   | Z   |                                | X   | X   |                                | X   | X   | X                              | Y   | Y   |
|              | 0.039                          | Z  | Z   | Z   |     |                                | X  | X   | Z   | Z   |                                | X   |     |                                | Y   |     | X                              | Y   | Y   |
|              | 0.047                          | Z  | Z   | Z   |     |                                | X  | X   | Z   | Z   |                                | X   |     |                                | Y   |     | X                              | Z   |     |
|              | 0.068                          |    |     |     |     |                                | Z  | Z   | Z   |     |                                |     |     |                                | Z   |     | X                              | Z   |     |
|              | 0.082                          |    |     |     |     |                                | Z  | Z   | Z   |     |                                |     |     |                                | Z   |     | X                              | Z   |     |
|              | 0.1                            |    |     |     |     |                                | Z  | Z   | Z   |     |                                |     |     |                                | Z   |     | Z                              | Z   |     |
| WVDC         | 25                             | 50 | 100 | 200 | 500 | 25                             | 50 | 100 | 200 | 500 | 50                             | 100 | 200 | 50                             | 100 | 200 | 50                             | 100 | 200 |
| SIZE         | 1210                           |    |     |     |     | 1812                           |    |     |     |     | 1825                           |     |     | 2220                           |     |     | 2225                           |     |     |

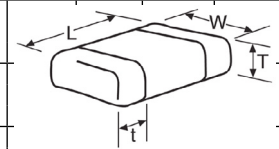

| Letter         | A               | B               | C               | E               | G               | J               | K               | M               | N               | P               | Q               | X               | Y               | Z               |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33<br>(0.013) | 0.22<br>(0.009) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.90<br>(0.035) | 0.94<br>(0.037) | 1.02<br>(0.040) | 1.27<br>(0.050) | 1.40<br>(0.055) | 1.52<br>(0.060) | 1.78<br>(0.070) | 2.29<br>(0.090) | 2.54<br>(0.100) | 2.79<br>(0.110) |
|                | PAPER           |                 |                 |                 |                 |                 | EMBOSSSED       |                 |                 |                 |                 |                 |                 |                 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>AVX](#)