



Part No. 1000146 WLAN / BT / Zigbee Embedded Stamped Metal Antenna

2.4 / 4.9 / 5.2 / 5.8 GHz (802.11 a/b/g/n/c + Japan)

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage



Wi-Fi Dual Band Stamped Metal Embedded Antenna

2.4 GHz: 5 GHz

KEY BENEFITS

Stay-in-Tune

Ethertronics antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met. Reliability

OBD-II

Products are the latest RoHS version compliant

APPLICATIONS

Embedded design
 Cellular, Headsets, Tablets
 Gateway, Access
 Telematics Tracking
 Healthcare Healthcare devices
 Smart Grid

PointHandheld

Ethertronics' Stamped Metal series of Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for full WIFI dual-band enabled handheld devices, media players and other mobile devices.

Greater Flexibility

Ethertronics' first-in-class IMD technology enables you to develop concept designs that are more advanced and that deliver superior performance in reception critical applications.

Electrical Specifications

Typical Characteristics, on 120 x 180 mm PCB

Frequency	2400 – 2485 MHz	4900 – 5825 MHz	
Peak Gain	1.5 dBi	2.6 dBi	
Average Efficiency	80%	72%	
VSWR Match	1.5:1 max	1.6:1 max	
Feed Point Impedance	50 ohms unbalanced		
Polarization	Linear		
Power Handling	0.5 Watt CW		

Mechanical Specifications & Ordering Part Number


Ordering Part Number	1000146
Size (mm)	17.85 x 6.9 x 4.3
Mounting	SMT
Weight (grams)	0.35
Packaging	Tape & Reel, 1000146 – 1,200 pieces per reel
Demo Board	1000418




Antenna Dimensions


Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)	
1000146	17.85 ± 0.3	6.9 ± 0.3	4.3 ± 0.4	



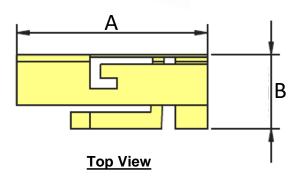








Pin	Description
1	Feed
2	Ground
3	Dummy Pad

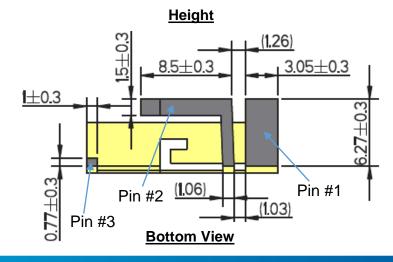






VSWR and Efficiency Plots (Off-Ground)


Typical Performance on 120 x 180 mm PCB


1000146 Antenna Mounted using 1000418

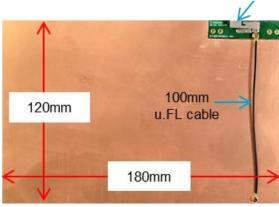

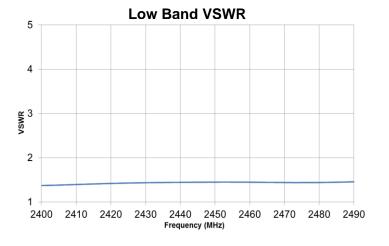

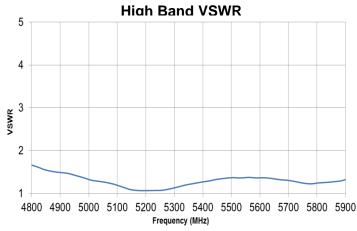

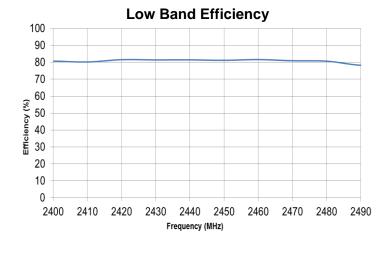


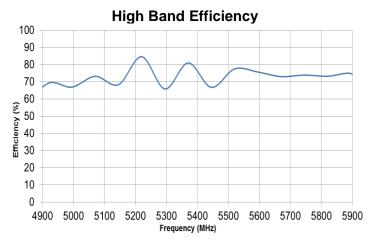






Antenna Radiation Patterns


Typical Performance on 120 x 180 mm PCB Measured @ 2400, 5100 MHz

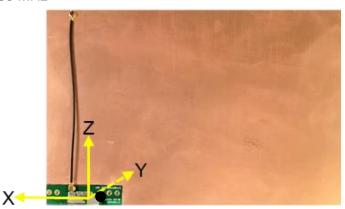


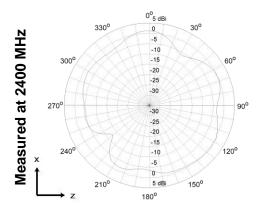






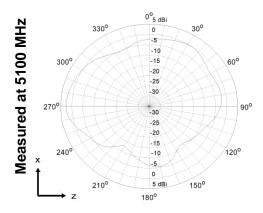









Antenna Layout (Minor Tuning Layout)

Typical layout dimensions (mm)

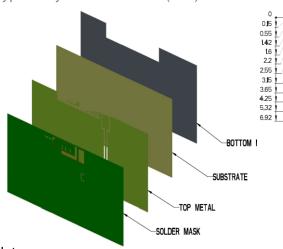





Layout has minor tuning capabilities to allow for small antenna footprint.

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad



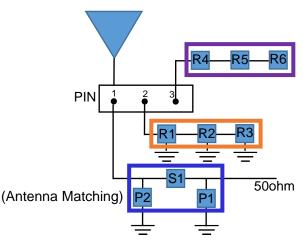

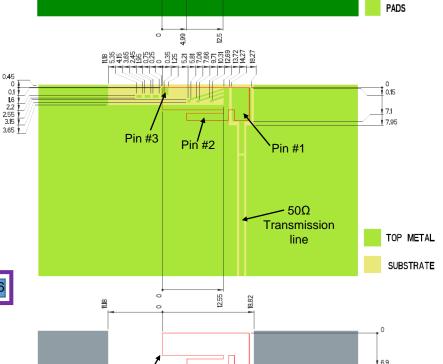

5.21 7.06 7.66 9.71 10.31 12.69 13.72 14.75

Antenna

Outline

SOLDER MASK

BOTTOM METAL

Antenna Matching & Tuning Component Values


	P1	S1	P2	R1 – R3	R4 – R6
Default Values	DNI	0Ω	DNI	DNI	DNI
Component Tolerance	N/A	N/A	N/A	N/A	N/A

Antenna Outline



Antenna Layout (Major Tuning Layout)




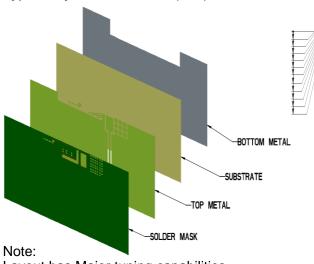


Layout has Major tuning capabilities to allow for robust tuning after board spin, instructions on **Antenna Matching Structure** page.

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

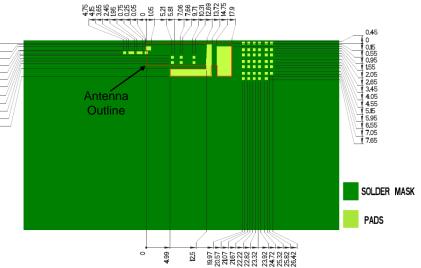


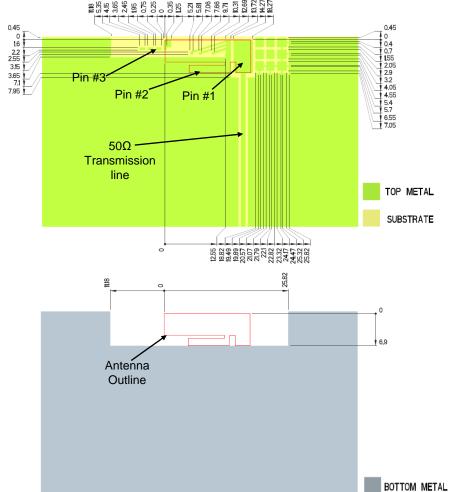



Antenna Matching Structure (Major Tuning Structure)

Typical matching values on 140 x 50 mm PCB

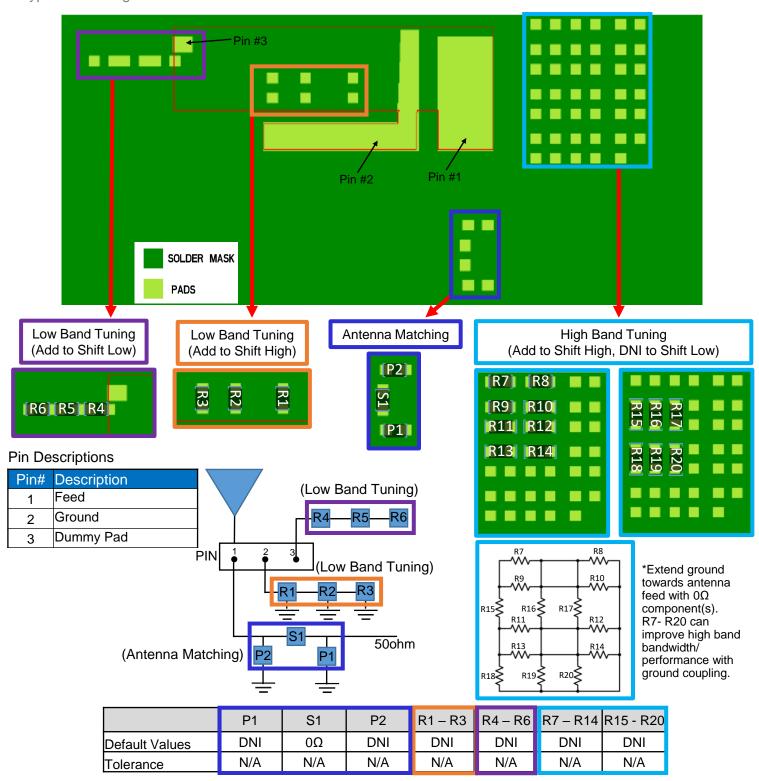

单击下面可查看定价,库存,交付和生命周期等信息

>>AVX