

# RF/Microwave Capacitors

## RF/Microwave COG (NP0) Capacitors


### Ultra Low ESR "U" Series, COG (NP0) Capacitors (RoHS)



#### GENERAL INFORMATION


"U" Series capacitors are COG (NP0) chip capacitors specially designed for "Ultra" low ESR for applications in the communications market. Max ESR and effective capacitance are met on each value producing lot to lot uniformity. Sizes available are EIA chip sizes 0603, 0805, and 1210.

#### DIMENSIONS: inches (millimeters)

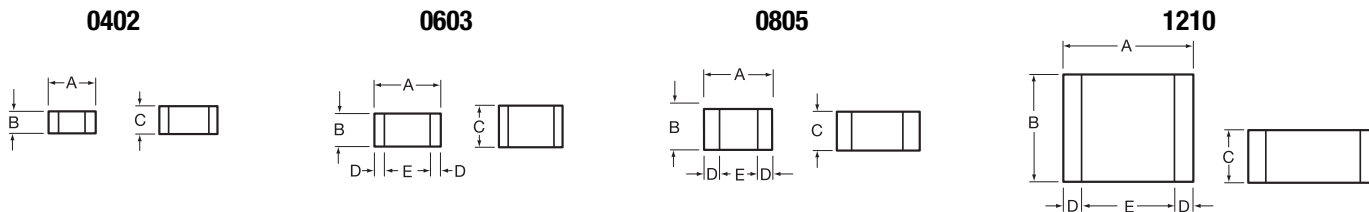

| Size | A                       | B                       | C                  | D                             | E                |
|------|-------------------------|-------------------------|--------------------|-------------------------------|------------------|
| 0402 | 0.039±0.004 (1.00±0.1)  | 0.020±0.004 (0.50±0.1)  | 0.024 (0.6) max    | 0.010 ± 0.006 (0.25 ± 0.15)   | 0.014 (0.36) min |
| 0603 | 0.060±0.010 (1.52±0.25) | 0.030±0.010 (0.76±0.25) | 0.036 (0.91) max   | 0.010 ± 0.005 (0.25 ± 0.13)   | 0.030 (0.76) min |
| 0805 | 0.079±0.008 (2.01±0.2)  | 0.049±0.008 (1.25±0.2)  | 0.045 (1.15mm) max | 0.020 ± 0.010 (0.51 ± 0.254)  | 0.020 (0.51) min |
| 1210 | 0.126±0.008 (3.2±0.2)   | 0.098±0.008 (2.49±0.2)  | 0.055 (1.40mm) max | 0.025 ± 0.015 (0.635 ± 0.381) | 0.040 (1.02) min |

#### HOW TO ORDER

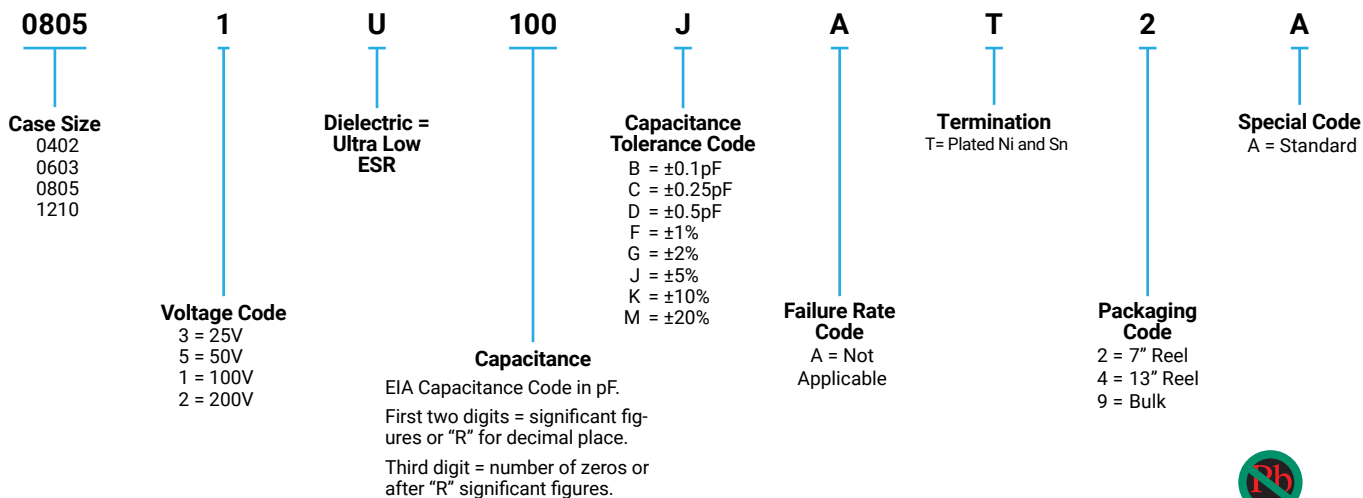

#### ELECTRICAL CHARACTERISTICS

##### Capacitance Values and Tolerances:

- Size 0402 - 0.2 pF to 22 pF @ 1 MHz
- Size 0603 - 1.0 pF to 100 pF @ 1 MHz
- Size 0805 - 1.6 pF to 160 pF @ 1 MHz
- Size 1210 - 2.4 pF to 1000 pF @ 1 MHz

##### Temperature Coefficient of Capacitance (TC):

0±30 ppm/°C (-55° to +125°C)

##### Insulation Resistance (IR):

- 10<sup>12</sup> Ω min. @ 25°C and rated WVDC
- 10<sup>11</sup> Ω min. @ 125°C and rated WVDC

##### Working Voltage (WVDC):

- |      |                     |
|------|---------------------|
| Size | Working Voltage     |
| 0402 | - 50, 25 WVDC       |
| 0603 | - 200, 100, 50 WVDC |
| 0805 | - 200, 100 WVDC     |
| 1210 | - 200, 100 WVDC     |

##### Dielectric Working Voltage (DWV):

250% of rated WVDC

##### Equivalent Series Resistance Typical (ESR):

- 0402 - See Performance Curve, page 300
- 0603 - See Performance Curve, page 300
- 0805 - See Performance Curve, page 300
- 1210 - See Performance Curve, page 300

##### Marking

Laser marking EIA J marking standard (except 0603) (capacitance code and tolerance upon request).

##### MILITARY SPECIFICATIONS

Meets or exceeds the requirements of MIL-C-55681



# RF/Microwave Capacitors

## RF/Microwave C0G (NP0) Capacitors

### Ultra Low ESR "U" Series, C0G (NP0) Capacitors (RoHS)




#### CAPACITANCE RANGE


| Cap (pF) | Available Tolerance | Size |      |      |      | Cap (pF) | Available Tolerance | Size |      |      |      | Cap (pF) | Available Tolerance | Size |      |      |      |
|----------|---------------------|------|------|------|------|----------|---------------------|------|------|------|------|----------|---------------------|------|------|------|------|
|          |                     | 0402 | 0603 | 0805 | 1210 |          |                     | 0402 | 0603 | 0805 | 1210 |          |                     | 0402 | 0603 | 0805 | 1210 |
| 0.2      | B,C                 | 50V  | N/A  | N/A  | N/A  | 1.0      | B,C,D               | 50V  | 200V | 200V | 200V | 100      | FG,J,K,M            | N/A  | 100V | 200V | 200V |
| 0.3      |                     |      |      |      |      | 1.1      |                     |      |      |      |      | 110      |                     |      |      |      |      |
| 0.4      |                     |      |      |      |      | 1.2      |                     |      |      |      |      | 120      |                     |      | 50V  |      |      |
| 0.5      | B,C                 |      |      |      |      | 1.3      |                     |      |      |      |      | 130      |                     |      | N/A  | 200V | 100V |
| 0.6      | B,C,D               |      |      |      |      | 1.4      |                     |      |      |      |      | 140      |                     |      |      | 100V |      |
| 0.7      |                     |      |      |      |      | 1.5      |                     |      |      |      |      | 150      |                     |      |      |      |      |
| 0.8      | B,C,D               |      |      |      |      | 1.6      |                     |      |      |      |      | 160      |                     |      |      |      | 100V |
| 0.9      |                     |      |      |      |      | 1.7      |                     |      |      |      |      | 180      |                     |      |      |      | N/A  |
|          |                     |      |      |      |      | 1.8      |                     |      |      |      |      | 200      |                     |      |      |      |      |
|          |                     |      |      |      |      | 1.9      |                     |      |      |      |      | 220      |                     |      |      |      |      |
|          |                     |      |      |      |      | 2.0      |                     |      |      |      |      | 270      |                     |      |      |      |      |
|          |                     |      |      |      |      | 2.1      |                     |      |      |      |      | 300      |                     |      |      |      |      |
|          |                     |      |      |      |      | 2.2      |                     |      |      |      |      | 330      |                     |      |      |      |      |
|          |                     |      |      |      |      | 2.4      |                     |      |      |      |      | 360      |                     |      |      |      |      |
|          |                     |      |      |      |      | 2.7      |                     |      |      |      |      | 390      |                     |      |      |      |      |
|          |                     |      |      |      |      | 3.0      |                     |      |      |      |      | 430      |                     |      |      |      | 200V |
|          |                     |      |      |      |      | 3.3      |                     |      |      |      |      | 470      |                     |      |      |      | 100V |
|          |                     |      |      |      |      | 3.6      |                     |      |      |      |      | 510      |                     |      |      |      |      |
|          |                     |      |      |      |      | 3.9      |                     |      |      |      |      | 560      |                     |      |      |      |      |
|          |                     |      |      |      |      | 4.3      |                     |      |      |      |      | 620      |                     |      |      |      |      |
|          |                     |      |      |      |      | 4.7      |                     |      |      |      |      | 680      |                     |      |      |      |      |
|          |                     |      |      |      |      | 5.1      |                     |      |      |      |      | 750      |                     |      |      |      |      |
|          |                     |      |      |      |      | 5.6      |                     |      |      |      |      | 820      |                     |      |      |      |      |
|          |                     |      |      |      |      | 6.2      | B,C,D               |      |      |      |      | 910      |                     |      |      |      |      |
|          |                     |      |      |      |      | 6.8      | B,C,J,K,M           |      |      |      |      | 1000     | FG,J,K,M            |      |      |      |      |

#### ULTRA LOW ESR, "U" SERIES


TYPICAL ESR vs. FREQUENCY  
0402 "U" SERIES

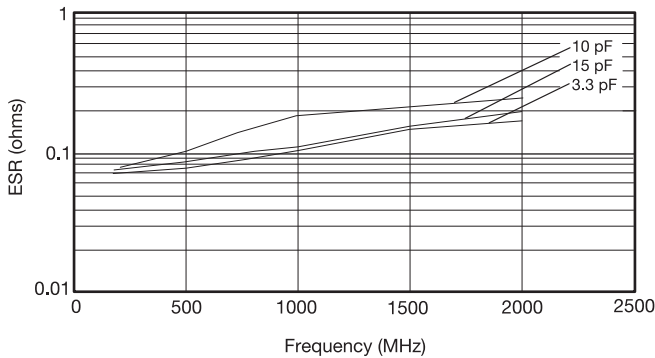


TYPICAL ESR vs. FREQUENCY  
0603 "U" SERIES

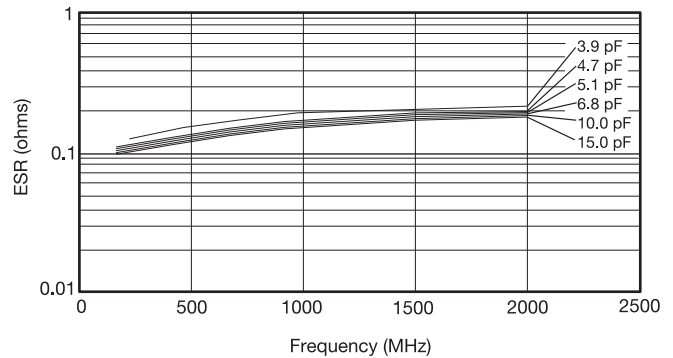

TYPICAL ESR vs. FREQUENCY  
0805 "U" SERIES

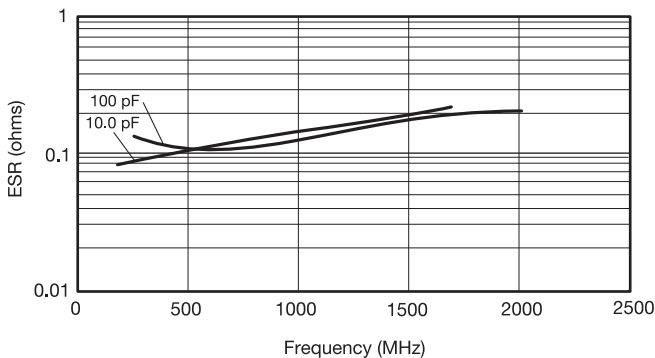


TYPICAL ESR vs. FREQUENCY  
1210 "U" SERIES

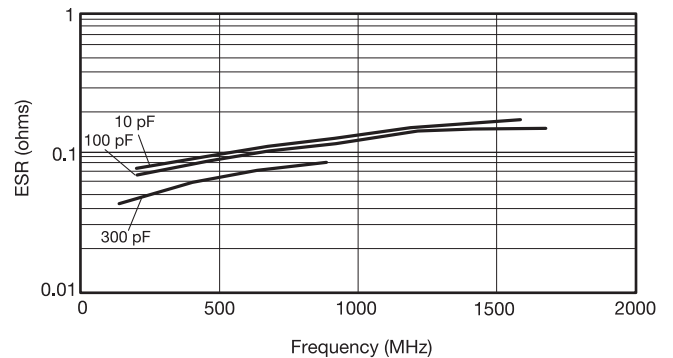

ESR Measured on the Boonton 34A

TYPICAL  
SERIES RESONANT FREQUENCY  
"U" SERIES CHIP

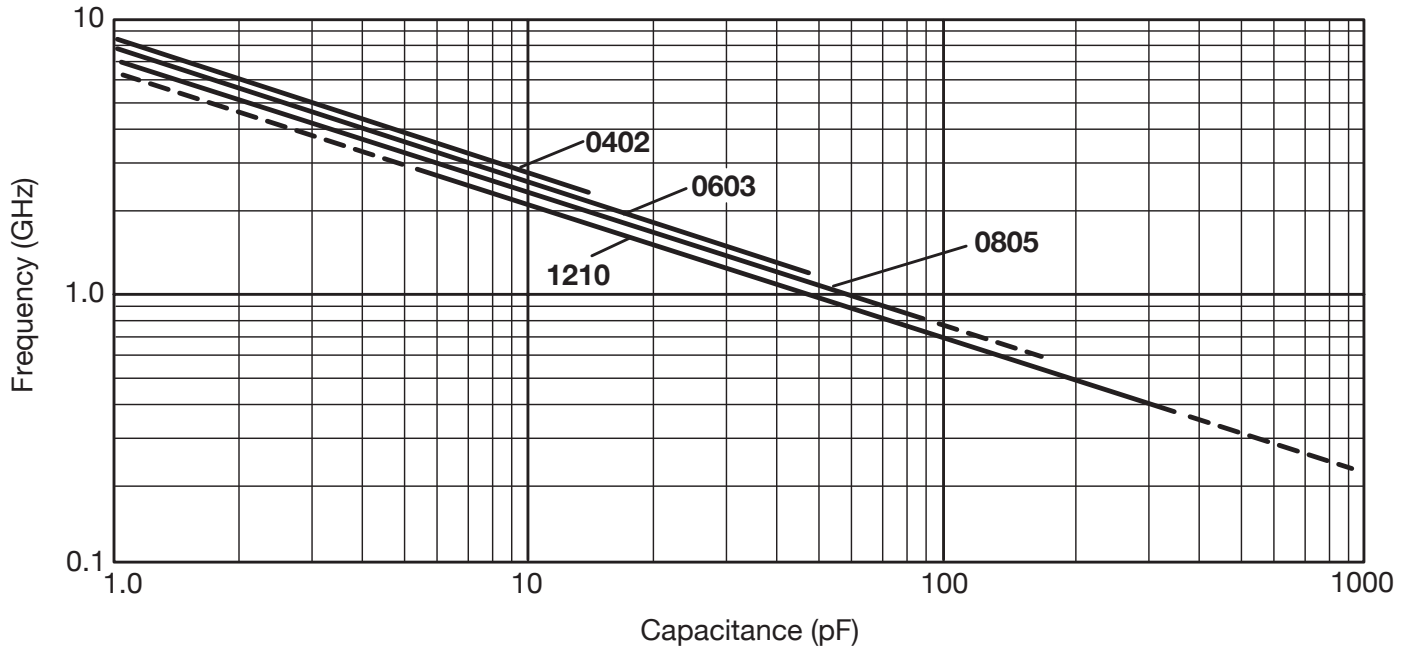

# RF/Microwave Capacitors

## RF/Microwave COG (NP0) Capacitors


### Ultra Low ESR "U" Series, COG (NP0) Capacitors (Sn/Pb)



#### GENERAL INFORMATION

"U" Series capacitors are COG (NP0) chip capacitors specially designed for "Ultra" low ESR for applications in the communications market. Max ESR and effective capacitance are met on each value producing lot to lot uniformity. Sizes available are EIA chip sizes 0603, 0805, and 1210.

#### DIMENSIONS: inches (millimeters)

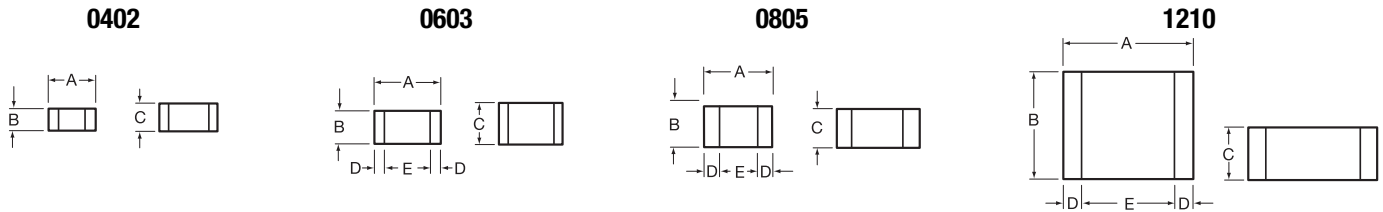

| Size | A                       | B                       | C                  | D                           | E                |
|------|-------------------------|-------------------------|--------------------|-----------------------------|------------------|
| 0402 | 0.039±0.004 (1.00±0.1)  | 0.020±0.004 (0.50±0.1)  | 0.024 (0.6) max    | 0.010 ± 0.006 (0.25 ± 0.15) | 0.014 (0.36) min |
| 0603 | 0.060±0.010 (1.52±0.25) | 0.030±0.010 (0.76±0.25) | 0.036 (0.91) max   | 0.010±0.005 (0.25±0.13)     | 0.030 (0.76) min |
| 0805 | 0.079±0.008 (2.01±0.2)  | 0.049±0.008 (1.25±0.2)  | 0.045 (1.15mm) max | 0.020±0.010 (0.51±0.254)    | 0.020 (0.51) min |
| 1210 | 0.126±0.008 (3.2±0.2)   | 0.098±0.008 (2.49±0.2)  | 0.055 (1.40mm) max | 0.025±0.015 (0.635±0.381)   | 0.040 (1.02) min |

#### HOW TO ORDER

**LD05**  
Case Size  
LD02 = 0402  
LD03 = 0603  
LD05 = 0805  
LD10 = 1210

**1**  
Voltage Code  
3 = 25V  
5 = 50V  
1 = 100V  
2 = 200V

**U**  
Dielectric = Ultra Low ESR

**100**  
Capacitance  
EIA Capacitance Code in pF.  
First two digits = significant figures or "R" for decimal place.  
Third digit = number of zeros or after "R" significant figures.

**J**  
Capacitance Tolerance Code  
B = ±0.1pF  
C = ±0.25pF  
D = ±0.5pF  
F = ±1%  
G = ±2%  
J = ±5%  
K = ±10%  
M = ±20%

**A**  
Failure Rate Code  
A = Not Applicable

**B**  
Termination  
B = 5% min lead

**2**  
Packaging Code  
2 = 7" Reel  
4 = 13" Reel  
9 = Bulk

**A**  
Special Code  
A = Standard

Not RoHS Compliant

#### ELECTRICAL CHARACTERISTICS

##### Capacitance Values and Tolerances:

Size 0402 - 0.2 pF to 22 pF @ 1 MHz  
 Size 0603 - 1.0 pF to 100 pF @ 1 MHz  
 Size 0805 - 1.6 pF to 160 pF @ 1 MHz  
 Size 1210 - 2.4 pF to 1000 pF @ 1 MHz

##### Temperature Coefficient of Capacitance (TC):

0±30 ppm/°C (-55° to +125°C)

##### Insulation Resistance (IR):

10<sup>12</sup> Ω min. @ 25°C and rated WVDC  
 10<sup>11</sup> Ω min. @ 125°C and rated WVDC

##### Working Voltage (WVDC):

Size Working Voltage  
 0402 - 50, 25 WVDC  
 0603 - 200, 100, 50 WVDC  
 0805 - 200, 100 WVDC  
 1210 - 200, 100 WVDC

##### Dielectric Working Voltage (DWV):

250% of rated WVDC

##### Equivalent Series Resistance Typical (ESR):

040 - See Performance Curve, page 306  
 0603 - See Performance Curve, page 306  
 0805 - See Performance Curve, page 306  
 1210 - See Performance Curve, page 306

##### Marking:

Laser marking EIA J marking standard (except 0603) (capacitance code and tolerance upon request).

##### Military Specifications

Meets or exceeds the requirements of MIL-C-55681

# RF/Microwave Capacitors

## RF/Microwave C0G (NP0) Capacitors

### Ultra Low ESR "U" Series, C0G (NP0) Capacitors (Sn/Pb)



#### CAPACITANCE RANGE

| Cap (pF) | Available Tolerance | Size |      |      |      |
|----------|---------------------|------|------|------|------|
|          |                     | LD02 | LD03 | LD05 | LD10 |
| 0.2      | B,C                 | 50V  | N/A  | N/A  | N/A  |
| 0.3      | ↓                   | ↓    | ↓    | ↓    | ↓    |
| 0.4      |                     |      |      |      |      |
| 0.5      | B,C                 | ↓    | ↓    | ↓    | ↓    |
| 0.6      | B,C,D               | ↓    | ↓    | ↓    | ↓    |
| 0.7      | ↓                   | ↓    | ↓    | ↓    | ↓    |
| 0.8      |                     |      |      |      |      |
| 0.9      | B,C,D               | ↓    | ↓    | ↓    | ↓    |


| Cap (pF) | Available Tolerance | Size |      |      |      |
|----------|---------------------|------|------|------|------|
|          |                     | LD02 | LD03 | LD05 | LD10 |
| 1.0      | B,C,D               | 50V  | 200V | 200V | 200V |
| 1.1      | ↓                   | ↓    | ↓    | ↓    | ↓    |
| 1.2      |                     |      |      |      |      |
| 1.3      |                     |      |      |      |      |
| 1.4      |                     |      |      |      |      |
| 1.5      |                     |      |      |      |      |
| 1.6      |                     |      |      |      |      |
| 1.7      |                     |      |      |      |      |
| 1.8      |                     |      |      |      |      |
| 1.9      |                     |      |      |      |      |
| 2.0      |                     |      |      |      |      |
| 2.1      |                     |      |      |      |      |
| 2.2      |                     |      |      |      |      |
| 2.4      |                     |      |      |      |      |
| 2.7      |                     |      |      |      |      |
| 3.0      |                     |      |      |      |      |
| 3.3      |                     |      |      |      |      |
| 3.6      |                     |      |      |      |      |
| 3.9      |                     |      |      |      |      |
| 4.3      |                     |      |      |      |      |
| 4.7      |                     |      |      |      |      |
| 5.1      |                     |      |      |      |      |
| 5.6      |                     |      |      |      |      |
| 6.2      |                     |      |      |      |      |
| 6.8      | B,C,D               | ↓    | ↓    | ↓    | ↓    |
|          | B,C,J,K,M           | ↓    | ↓    | ↓    | ↓    |

| Cap (pF) | Available Tolerance | Size |      |      |      |
|----------|---------------------|------|------|------|------|
|          |                     | LD02 | LD03 | LD05 | LD10 |
| 7.5      | B,C,J,K,M           | 50V  | 200V | 200V | 200V |
| 8.2      | ↓                   | ↓    | ↓    | ↓    | ↓    |
| 9.1      |                     |      |      |      |      |
| 10       |                     |      |      |      |      |
| 11       |                     |      |      |      |      |
| 12       |                     |      |      |      |      |
| 13       |                     |      |      |      |      |
| 15       |                     |      |      |      |      |
| 18       |                     |      |      |      |      |
| 20       |                     |      |      |      |      |
| 22       |                     |      |      |      |      |
| 24       |                     |      |      |      |      |
| 27       |                     |      |      |      |      |
| 30       | 50V                 | 200V | 200V | 200V |      |
| 33       | N/A                 | ↓    | ↓    | ↓    |      |
| 36       | ↓                   | ↓    | ↓    | ↓    |      |
| 39       | ↓                   | ↓    | ↓    | ↓    |      |
| 43       | ↓                   | ↓    | ↓    | ↓    |      |
| 47       | ↓                   | ↓    | ↓    | ↓    |      |
| 51       | ↓                   | ↓    | ↓    | ↓    |      |
| 56       | ↓                   | ↓    | ↓    | ↓    |      |
| 68       | ↓                   | ↓    | ↓    | ↓    |      |
| 75       | ↓                   | ↓    | ↓    | ↓    |      |
| 82       | ↓                   | ↓    | ↓    | ↓    |      |
| 91       | ↓                   | ↓    | ↓    | ↓    |      |


| Cap (pF) | Available Tolerance | Size |      |      |      |
|----------|---------------------|------|------|------|------|
|          |                     | LD02 | LD03 | LD05 | LD10 |
| 100      | F,G,J,K,M           | N/A  | 100V | 200V | 200V |
| 110      | ↓                   | ↓    | ↓    | ↓    | ↓    |
| 120      |                     |      |      |      |      |
| 130      |                     |      |      |      |      |
| 140      |                     |      |      |      |      |
| 150      |                     |      |      |      |      |
| 160      |                     |      |      |      |      |
| 180      |                     |      |      |      |      |
| 200      |                     |      |      |      |      |
| 220      |                     |      |      |      |      |
| 270      |                     |      |      |      |      |
| 300      |                     |      |      |      |      |
| 330      |                     |      |      |      |      |
| 360      |                     |      |      |      |      |
| 390      |                     |      |      |      |      |
| 430      |                     |      |      |      |      |
| 470      |                     |      |      |      |      |
| 510      |                     |      |      |      |      |
| 560      |                     |      |      |      |      |
| 620      |                     |      |      |      |      |
| 680      |                     |      |      |      |      |
| 750      |                     |      |      |      |      |
| 820      |                     |      |      |      |      |
| 910      |                     |      |      |      |      |
| 1000     | F,G,J,K,M           | ↓    | ↓    | ↓    | ↓    |

#### ULTRA LOW ESR, "U" SERIES


TYPICAL ESR vs. FREQUENCY  
0402 "U" SERIES

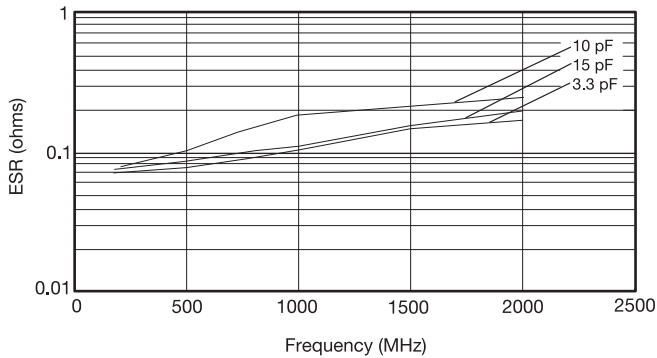


TYPICAL ESR vs. FREQUENCY  
0603 "U" SERIES

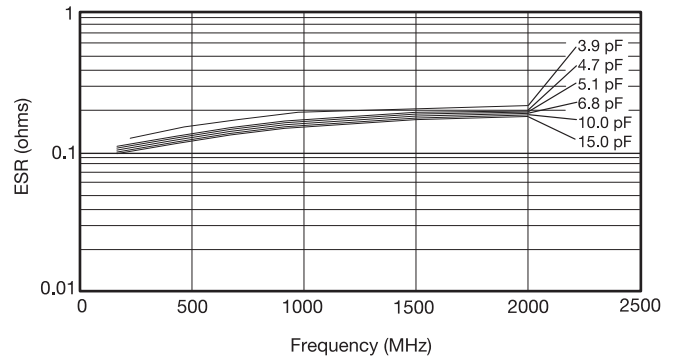

TYPICAL ESR vs. FREQUENCY  
0805 "U" SERIES

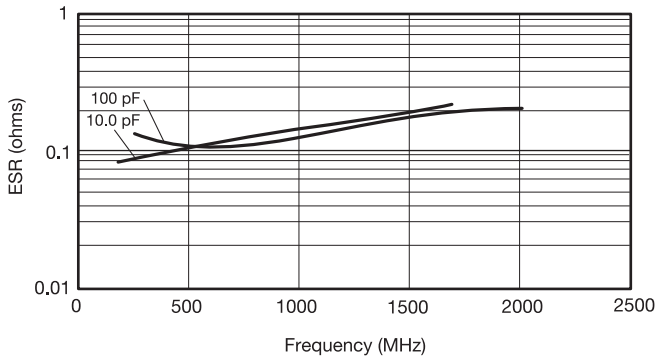


TYPICAL ESR vs. FREQUENCY  
1210 "U" SERIES

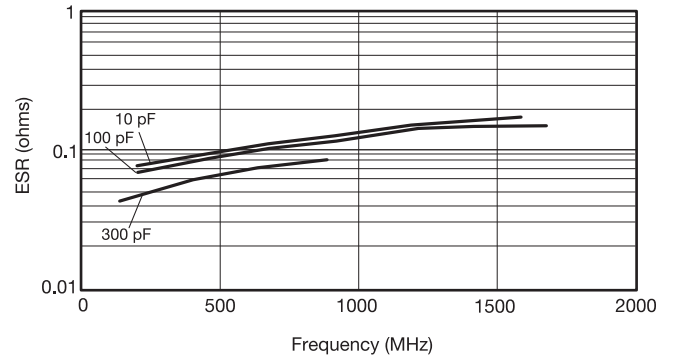

ESR Measured on the Boonton 34A

TYPICAL  
SERIES RESONANT FREQUENCY  
"U" SERIES CHIP

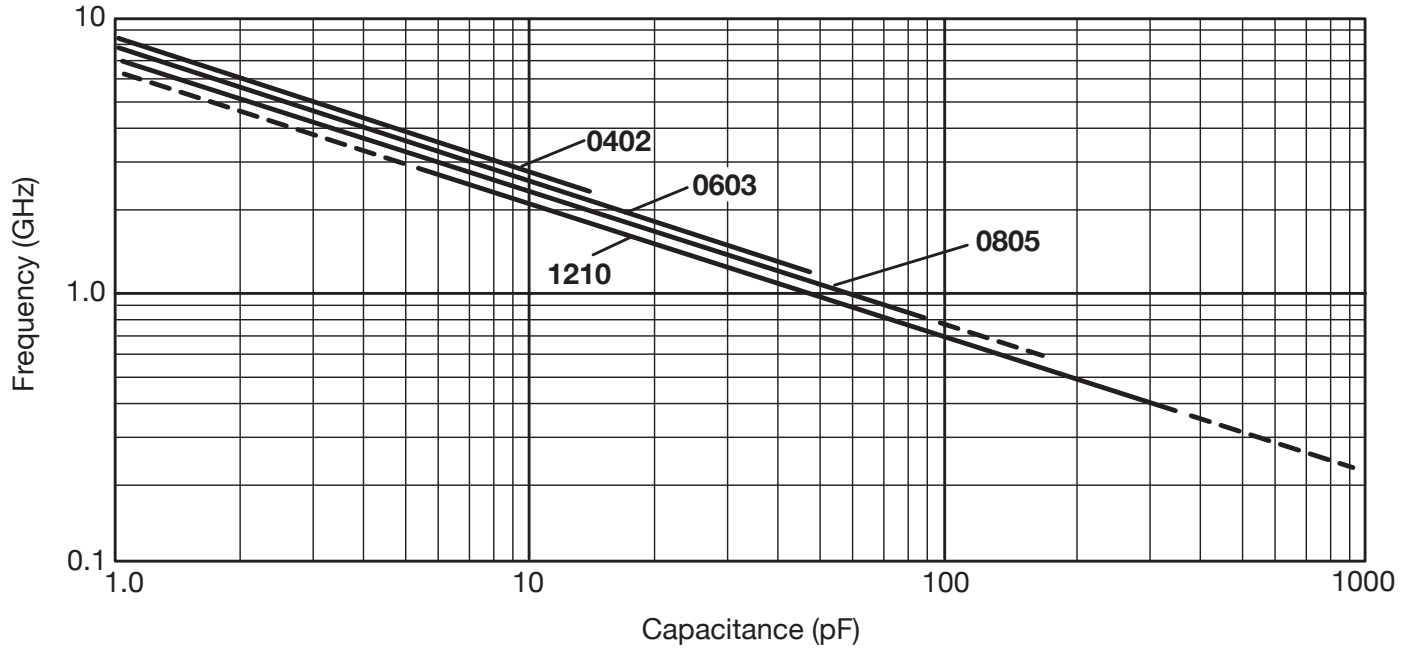

单击下面可查看定价，库存，交付和生命周期等信息

[>>AVX](#)