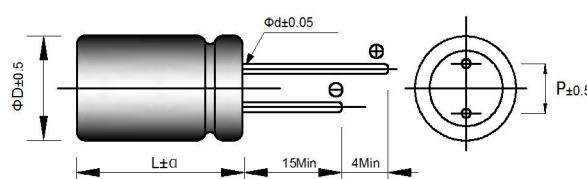
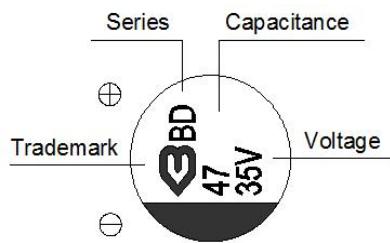


BD Series NEW

- Low impedance, high ripple current, high voltage
- Load life of 2000 hours at 105°C
- RoHS Compliant

**◆ 规格表 Specifications**

项目 Items	特性参数 Characteristics												
使用温度范围 Category Temperture Range	-55 ~ +105°C												
额定工作电压范围 Rated Voltage Range	35 ~ 250 V												
静电容量允许偏差 Capacitance tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)												
漏电流 Leakage Current	<p>施加额定工作电压2分钟后读数，小于或等于规格值 (20°C) $I \leq 0.15CV$ 或 $120\mu A$ (取大值) (The bigger)</p> <p>After 2 minutes applied for rated voltage at 20°C, less than or equal to the specified value.</p>												
损耗角正切值tanδ Dissipation Factor	<p>小于或等于规格 Less than or equal to the specified</p> <p>(at 20°C, 120Hz)</p>												
温度特性 Low Temperture Characteristics (Max.Impedance Ratio)	Z(-25°C)/Z(+20°C)	≤ 1.25	(100KHz)										
	Z(-55°C)/Z(+20°C)	≤ 1.25											
<p>耐久性 Endurance</p> <p>105°C 施加额定工作电压2000小时，恢复到20°C后，产品性能应满足以下要求 The specifications listed below shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Appearance</td> <td>No significant damage</td> </tr> <tr> <td>Capacitance change</td> <td>$\leq \pm 20\%$ of the initial value</td> </tr> <tr> <td>D.F.(tanδ)</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>ESR</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>\leq The specified value</td> </tr> </table>				Appearance	No significant damage	Capacitance change	$\leq \pm 20\%$ of the initial value	D.F.(tanδ)	$\leq 150\%$ of the specified value	ESR	$\leq 150\%$ of the specified value	Leakage current	\leq The specified value
Appearance	No significant damage												
Capacitance change	$\leq \pm 20\%$ of the initial value												
D.F.(tanδ)	$\leq 150\%$ of the specified value												
ESR	$\leq 150\%$ of the specified value												
Leakage current	\leq The specified value												
<p>Damp Heat (Steady State) 耐湿负荷特性</p> <p>在60°C 温度，湿度90%~95%RH的环境中，施加额定电压1000小时后，恢复到20°C后，产品性能应满足以下要求 The specifications listed below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90%~ 95% RH.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Appearance</td> <td>No significant damage</td> </tr> <tr> <td>Capacitance change</td> <td>$\leq \pm 20\%$ of the initial value</td> </tr> <tr> <td>D.F.(tanδ)</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>ESR</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>\leq The specified value</td> </tr> </table>				Appearance	No significant damage	Capacitance change	$\leq \pm 20\%$ of the initial value	D.F.(tanδ)	$\leq 150\%$ of the specified value	ESR	$\leq 150\%$ of the specified value	Leakage current	\leq The specified value
Appearance	No significant damage												
Capacitance change	$\leq \pm 20\%$ of the initial value												
D.F.(tanδ)	$\leq 150\%$ of the specified value												
ESR	$\leq 150\%$ of the specified value												
Leakage current	\leq The specified value												
<p>浪涌电压特性 Voltage)</p> <p>(Surge</p> <p>浪涌电压=额定电压* 1.15(V) Surge Voltage=Rated voltage * 1.15(V)</p> <p>在105°C 环境中，按充电30秒，放电5分30秒，连续施加浪涌电压1000次($R_c=1k\Omega$)，待恢复后测试，应满足以下要求 The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor ($R_c=1k\Omega$) and discharge for 5 minutes 30 seconds</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Appearance</td> <td>No significant damage</td> </tr> <tr> <td>Capacitance change</td> <td>$\leq \pm 20\%$ of the initial value</td> </tr> <tr> <td>D.F.(tanδ)</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>ESR</td> <td>$\leq 150\%$ of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>\leq The specified value</td> </tr> </table>				Appearance	No significant damage	Capacitance change	$\leq \pm 20\%$ of the initial value	D.F.(tanδ)	$\leq 150\%$ of the specified value	ESR	$\leq 150\%$ of the specified value	Leakage current	\leq The specified value
Appearance	No significant damage												
Capacitance change	$\leq \pm 20\%$ of the initial value												
D.F.(tanδ)	$\leq 150\%$ of the specified value												
ESR	$\leq 150\%$ of the specified value												
Leakage current	\leq The specified value												

◆ 外形图Dimensions (mm)

ΦD	5	6.3	8	10
P	2	2.5	3.5	5
Φd	0.5	0.5	0.6	0.6
L<16mm: 1.0				
L≥ 16mm: 2.0				

BD Series

◆ 尺寸与最大纹波电流一览表 Standard Ratings

Rated voltage (V)	Rated capacitance(μF)	Case size ΦD*L(mm)	tanδ (120Hz)	ESR(mΩ) at 20°C,100 KHz	Rated ripple current (mAmps/105°C/100kHz)
35 (1V)	22	6.3*8	0.12	90	720
	33	6.3*8	0.12	82	1150
	47	8*8	0.12	73	1500
	150	8*12	0.12	65	2300
	220	10*12	0.12	50	2900
	470	10*12	0.12	30	3500
50 (1H)	22	6.3*8	0.12	68	1800
	47	8*8	0.12	45	1800
	47	8*12	0.12	34	2100
	68	10*12	0.12	29	2300
	120	10*12	0.12	28	2800
63 (1J)	22	8*8	0.12	75	1500
	33	8*12	0.12	68	1800
	82	10*12	0.12	45	2500
80 (1K)	10	8*8	0.12	48	1150
	12	8*12	0.12	46	1800
	22	10*12	0.12	41	2100
100 (2A)	15	8*12	0.12	47	1850
	22	10*12	0.12	40	2300
	33	10*12	0.12	40	2500
160 (2C)	10	8*12	0.12	100	1350
	15	10*12	0.12	85	1580
	22	10*12	0.12	80	1850
200 (2D)	8.2	8*12	0.12	110	950
	15	10*12	0.12	110	1350
220 (2P)	6.8	8*12	0.12	110	750
	10	10*12	0.12	110	1050
250 (2E)	3.3	8*12	0.12	486	450
	6.8	10*12	0.12	456	780
	8.2	10*12	0.12	420	950

◆ 纹波电流补正系数 Rated Ripple Current Coefficient

频率Frequency(Hz)	120Hz≤f<1kHz	1kHz≤f<10kHz	10kHz≤f<100kHz	100kHz≤f<500kHz
系数 Coefficient	0.05	0.30	0.70	1.00

单击下面可查看定价，库存，交付和生命周期等信息

[>>BERYL\(绿宝石\)](#)