

40 PIN SMD ETHERNET 10/100 BASE –TX HIGH SPEED LAN MAGNETICS

P/N: 40SS1041AXM HF DATA SHEET

Page : 1/2

Feature



- Symmetrical TX and RX channels for auto MDIX capability.
- Compliant with IEEE 802.3u and ANSI X3.263 standards including 350uH OCL with 8mA bias.
- Comply with ROHS & Halogen Free requirements.
- Operating temperature range : -40 to +85 .
- Storage temperature range: -40 to +85 .



Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%) TX/RX	OCL (uH Min) @100KHz/0.1V with 8mA DC Bias	L.L (uH Max)	C _{www} (pF Max)	DCMR (dB Min)		HI-POT (Vrms)
					1-60MHz	60-200MHz	
40SS1041AXM HF	1CT:1CT	350	0.4	56	-37	-25	1500

Continue

Part Number	Insertion Loss	Return Loss				Cross talk			
	(dB Max)	(dB Min)				(dB Min)			
	0.3-100MHz	2-30MHz	40MHz	50MHz	60-80MHz	1MHz	30MHz	60MHz	100MHz
40SS1041AXM HF	-1.4	-16	-12	-12	-10	-55	-45	-40	-33

Schematic

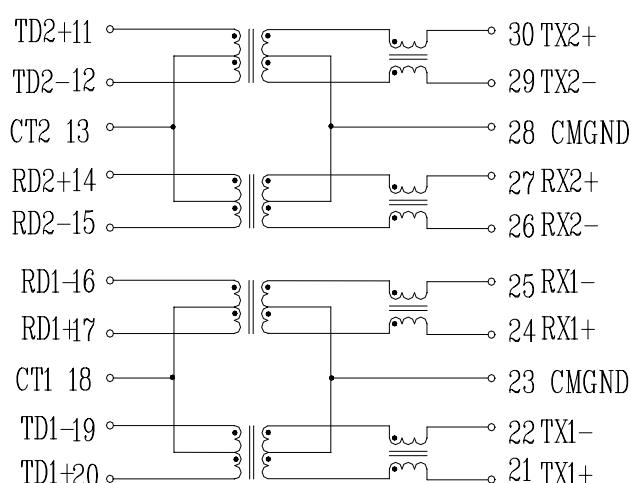
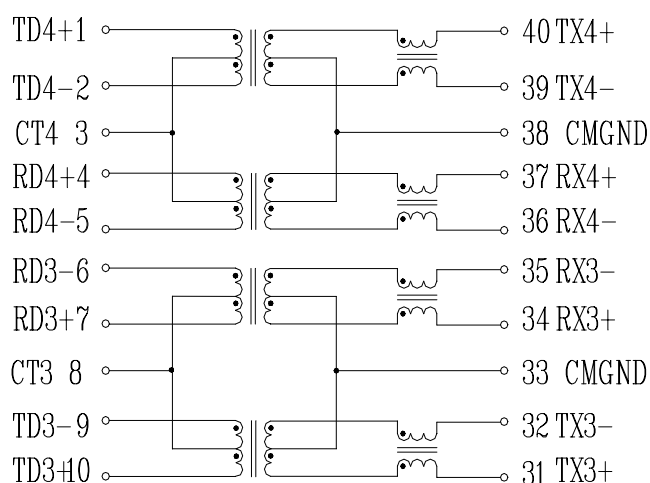


40 PIN SMD ETHERNET 10/100 BASE –TX HIGH SPEED LAN MAGNETICS



P/N: 40SS1041AXM HF DATA SHEET

Page : 2/2

Mechanical

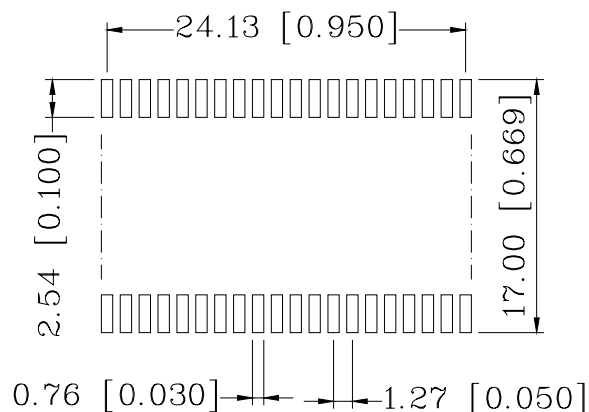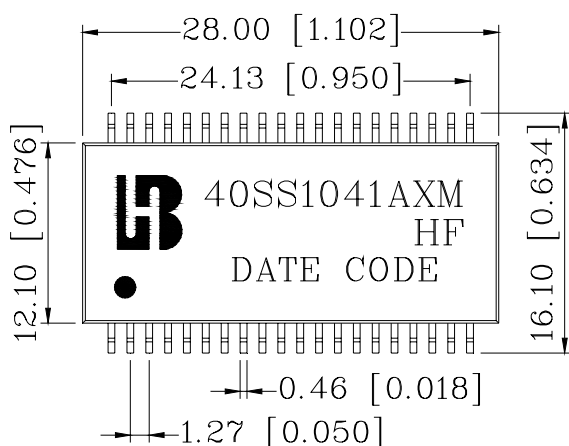

SUGGESTED PAD LAYOUT

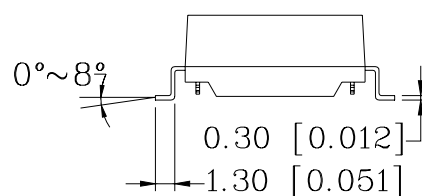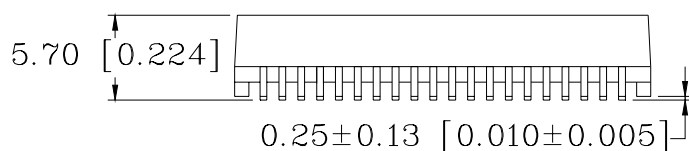

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]

单击下面可查看定价，库存，交付和生命周期等信息

[>>Bothhand\(帛汉\(帛漠\)\)](#)