



# Bridgelux® Vesta™ Series Tunable White Linear

Product Data Sheet DS154



## Introduction

Vesta™ Series Tunable White Linears deliver adaptable light in a solid state lighting package. Vesta™ Series products tap into the powerful mediums of light and color to influence experience, well-being, and human emotion. They allow designers to mimic daylight to increase productivity and well-being and retailers to influence shopper behavior. Vesta Series Linears are designed for linear troffers, pendants and other luminaires in indoor commercial and industrial applications.

Available in 280 mm and 560 mm lengths, the linear products can be connected end-to-end thereby providing flexibility in designing luminaires. The Zhaga compatible linear products further simplify design by providing easy mounting options, reusable poke-in connectors and by being compatible with a variety of off-the-shelf optics.

### Features

- Tuning range from 2700K-5000K
- Efficacy of 135 lm/W typical
- Uniform, high quality illumination
- Minimum 90 CRI option
- Designed following Zhaga Book 7 standards L28W4 and L56W4
- Easy wiring enabled by poke-in connectors
- ENERGY STAR® / ANSI compliant 3 SDCM color binning structure

### Benefits

- Superior color mixing
- Compact system design
- High quality, true color reproduction
- Enhanced optical control
- Uniform, consistent white light
- Reliable use at elevated currents enables greater design flexibility
- Easy installation using mounting cutout and connector




# Contents

|                            |    |
|----------------------------|----|
| Product Feature Map        | 2  |
| Product Nomenclature       | 2  |
| Product Selection Guide    | 3  |
| Electrical Characteristics | 4  |
| Absolute Maximum Ratings   | 5  |
| Performance Curves         | 6  |
| Typical Radiation Pattern  | 8  |
| Typical Color Spectrum     | 9  |
| Mechanical Dimensions      | 10 |
| Color Binning Information  | 12 |
| Packaging and Labeling     | 13 |
| Design Resources           | 14 |
| Precautions                | 14 |
| Disclaimers                | 14 |
| About Bridgelux            | 15 |


# Product Feature Map

Bridgelux Vesta Series Linears are fully engineered devices that provide consistent thermal and optical performance on an engineered mechanical platform. The linear products incorporate several features to simplify design integration and assembly. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the Vesta Series family of products.

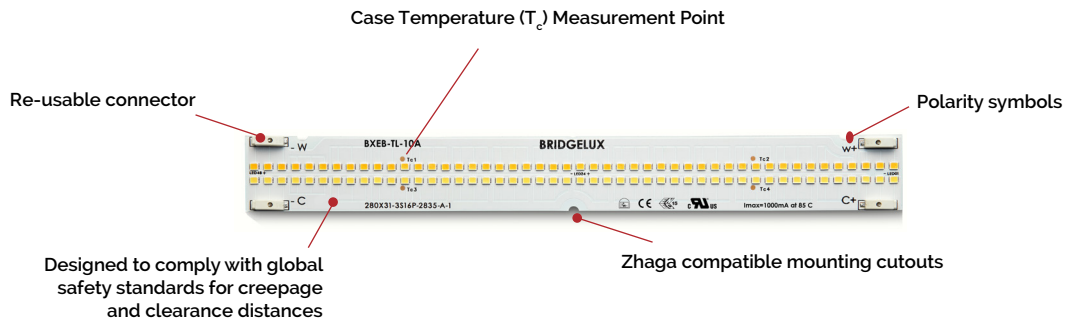

## Product Nomenclature

The part number designation for Bridgelux Vesta Series Linear is explained as follows:

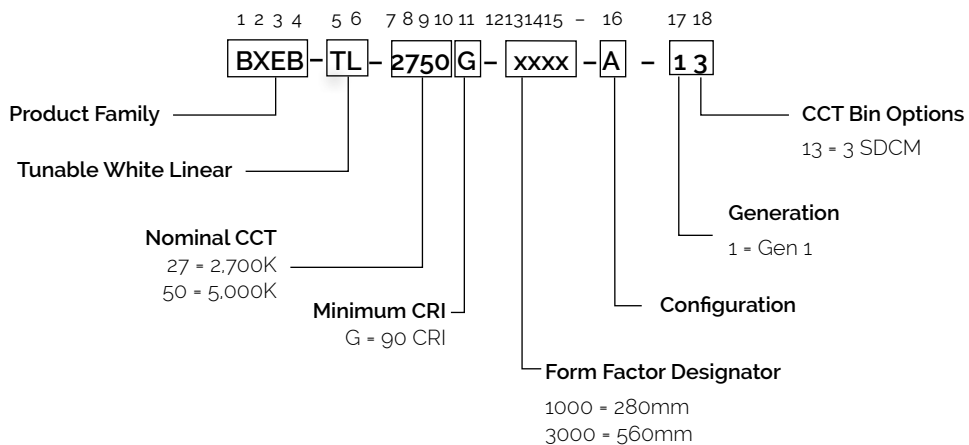

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Measurement Data ( $T_c = 25^\circ\text{C}$ .)

| Part Number             | Nominal CCT <sup>1</sup> (K) | CRI <sup>2</sup> | Nominal Drive Current (mA) | Typical $V_f$ $T_c=25^\circ\text{C}$ (V) | Typical Power $T_c=25^\circ\text{C}$ (W) | Typical Efficacy $T_c=25^\circ\text{C}$ (lm/W) | Typical Pulsed Flux <sup>3,4</sup> $T_c=25^\circ\text{C}$ (lm) | Minimum Pulsed Flux <sup>4,5</sup> $T_c=25^\circ\text{C}$ (lm) |
|-------------------------|------------------------------|------------------|----------------------------|--|--|--|--|--|
| BXEB-TL-2750G-1000-A-13 | 2700                         | 90               | 500                        | 24.8                                     | 12.4                                     | 129  | 1596   | 1484   |
|                         | 5000                         | 90               | 500                        | 24.8                                     | 12.4                                     | 135  | 1676   | 1596   |
| BXEB-TL-2750G-3000-A-13 | 2700                         | 90               | 1000                       | 24.8                                     | 24.8                                     | 129  | 3192   | 2969   |
|                         | 5000                         | 90               | 1000                       | 24.8                                     | 24.8                                     | 135  | 3352   | 3192   |

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011.
2. CRI values are minimums. Minimum Rg value for 90 CRI products is 50. Bridgelux maintains a  $\pm 3$  tolerance on all Rg values.
3. Products tested at nominal test current where temperature of center case temperature point  $T_c = 25^\circ\text{C}$ . Values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
4. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
5. Minimum performance values are provided as reference only and are not a guarantee of performance.

# Electrical Characteristics

**Table 2:** Electrical Characteristics

| Part Number             | Nominal Drive Current (mA) | Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1, 2, 3</sup> |         |         | Typical Coefficient of Forward Voltage <sup>4</sup><br>$\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ ) | Driver Selection Voltages <sup>5</sup> (V)     |  |
|-------------------------|----------------------------|---|---------|---------|--|--|--|
|                         |                            | Minimum   | Typical | Maximum |  | $V_f$ Min. Hot<br>$T_c = 85^\circ\text{C}$ (V) | $V_f$ Max. Cold<br>$T_c = -40^\circ\text{C}$ (V) |
| BXEB-TL-2750G-1000-A-13 | 500                        | 23.6  | 24.8    | 26.0    | -8.0   | 23.1   | 26.5   |
|                         | 1000                       | 25.0  | 26.3    | 27.6    | -8.0   | 24.5   | 28.1   |
| BXEB-TL-2750G-3000-A-13 | 1000                       | 23.6  | 24.8    | 26.0    | -8.0   | 23.1   | 26.5   |
|                         | 2000                       | 25.0  | 26.3    | 27.6    | -8.0   | 24.5   | 28.1   |

Notes for Table 2:

1. Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a tolerance of  $\pm 0.10$  V on forward voltage measurements.
3. This product has been designed and manufactured per IEC 62031:2014. This product has passed dielectric withstand voltage testing at 1240 V. The working voltage designated for the insulation is 120V d.c. The maximum allowable voltage across the array must be determined in the end product application.
4. Typical coefficient of forward voltage tolerance is  $\pm 0.1$  mV for nominal current.
5.  $V_f$  min hot and max cold values are provided as reference only and are not guaranteed. These values are provided to aid in driver design and selection over the operating range of the product.

# Absolute Maximum Ratings

**Table 3:** Maximum Ratings


| Parameter   | Maximum Rating  |                         |
|---|---|-------------------------|
| Storage Temperature                                       | -40°C to +85°C  |                         |
| Operating Case Temperature <sup>1</sup> (T <sub>c</sub> ) | 85°C  |                         |
| Soldering Temperature <sup>2</sup>                        | 350°C or lower for a maximum of 5 seconds                     |                         |
| Maximum Reverse Voltage                                   | Linear products are not designed to be driven in reverse bias |                         |
|   | BXEB-TL-2750G-1000-A-13                                       | BXEB-TL-2750G-3000-A-13 |
| Maximum Drive Current <sup>3</sup>                        | 1000mA  | 2000mA                  |

Notes for Table 3:


1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Design Guide for handling Vesta Series Tunable White Linears.
3. Lumen maintenance (L70) and lifetime predictions are valid for drive current and case temperature conditions used for LM-80 testing as included in the applicable LM-80 test report for the SMDs used in the linear products. Contact your Bridgelux sales representatives for LM-80 report.

# Performance Curves


**Figure 1: 280mm Current vs. Forward Voltage,  $T_c=25^\circ\text{C}$**

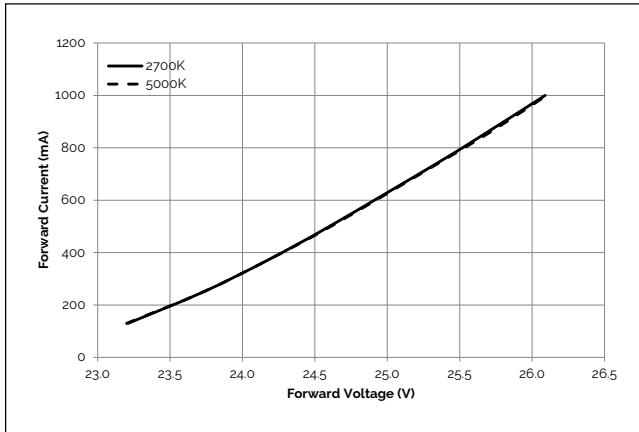


**Figure 2: 560mm Current vs. Forward Voltage,  $T_c=25^\circ\text{C}$**

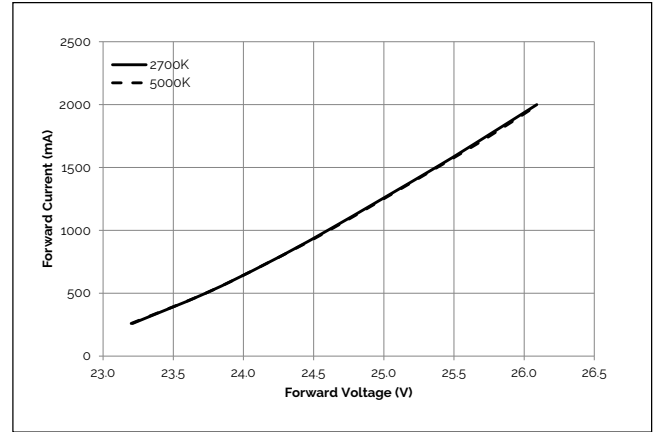


**Figure 3: 280mm Relative Flux vs. Current,  $T_c=25^\circ\text{C}$**

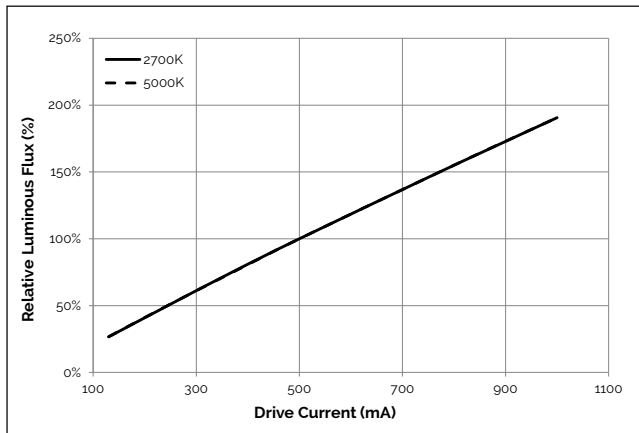


**Figure 4: 560mm Relative Flux vs. Current,  $T_c=25^\circ\text{C}$**

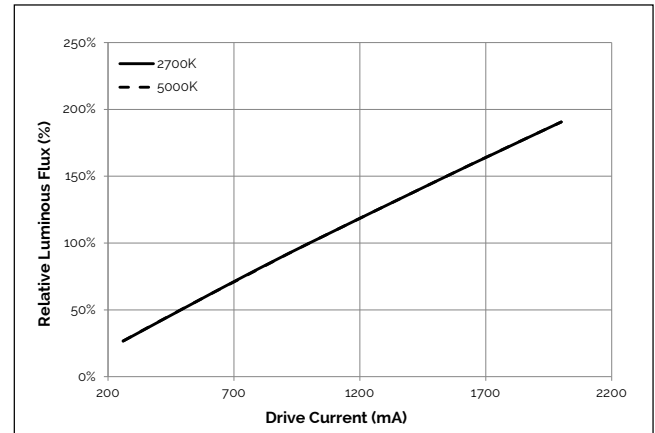

**Figure 5: Relative Flux vs. Case Temperature**

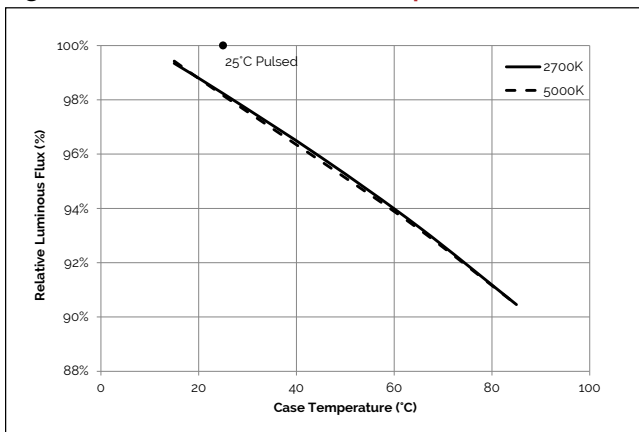


**Figure 6: Relative Voltage vs. Case Temperature**

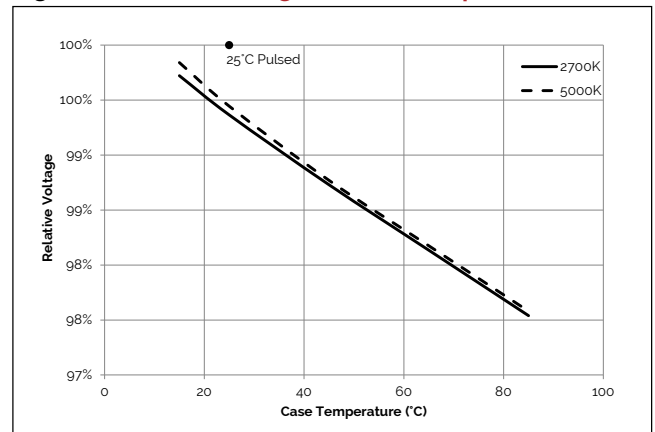




# Performance Curves


**Figure 7: 280mm Color shift vs. Forward Current**

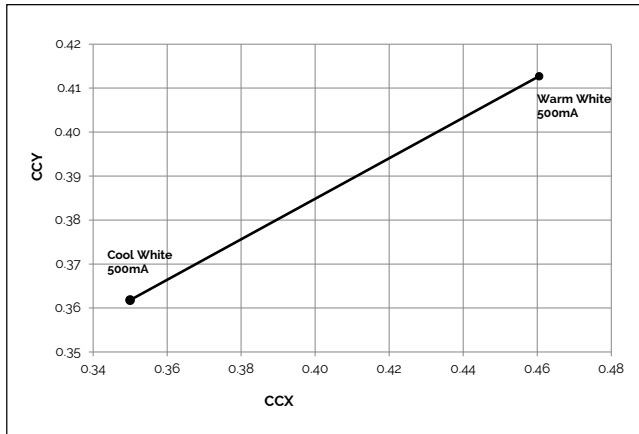


**Figure 8: 560mm Color shift vs. Forward Current**

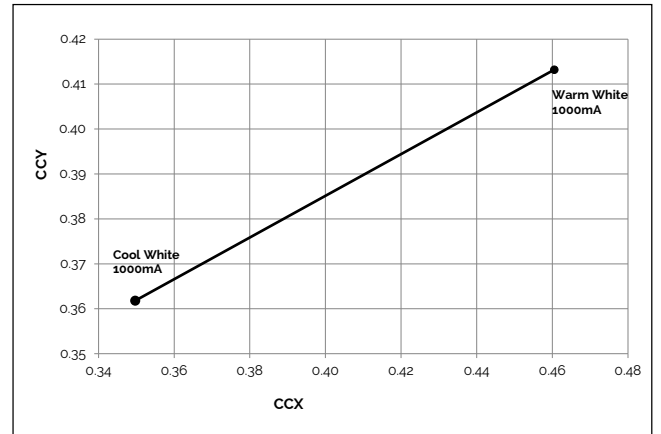

**Figure 9: Relative Flux vs. Warm White Current Ratio**

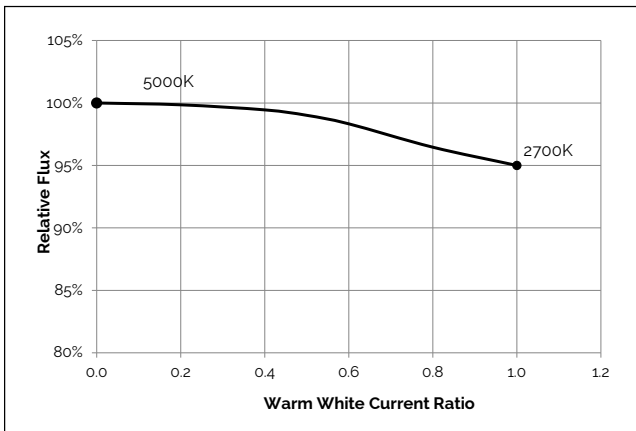


**Figure 10: CCT vs. Warm White Current Ratio**

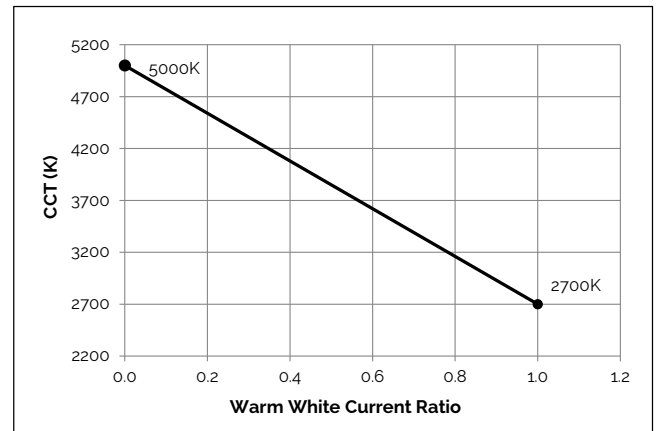

# Typical Radiation Pattern

**Figure 11: Typical Spatial Radiation Pattern**

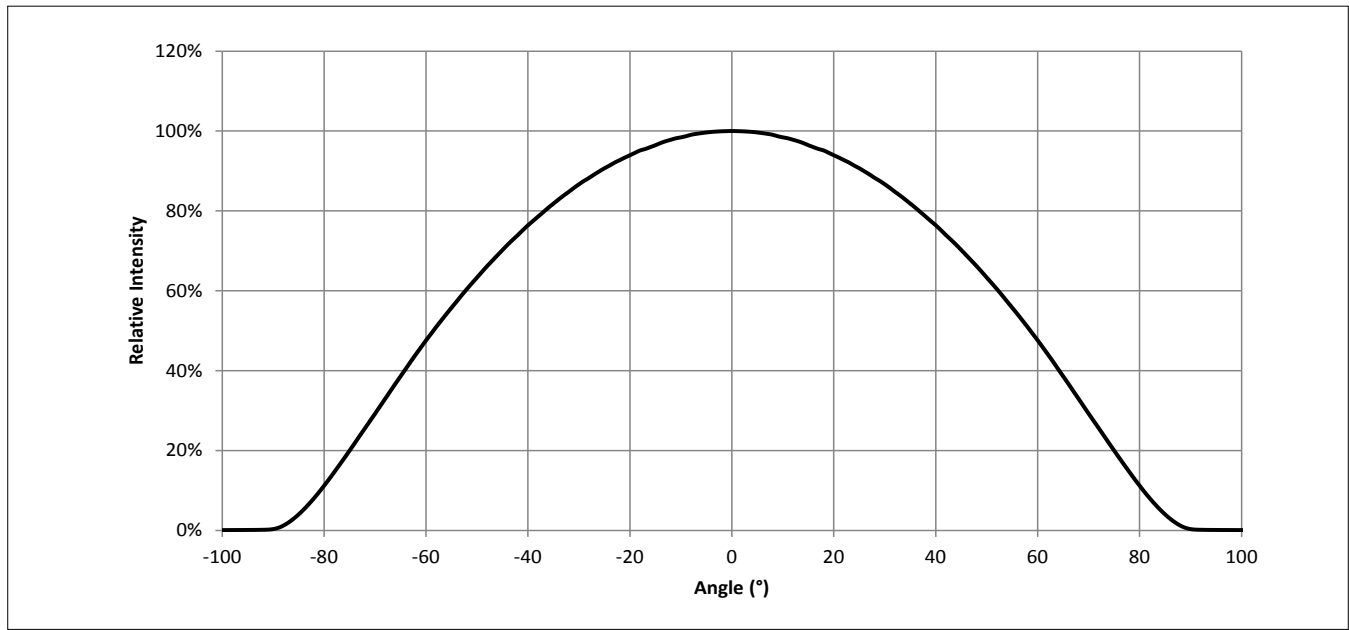


Notes for Figure 11:

1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.

# Typical Color Spectrum

Figure 12: Typical Color Spectrum

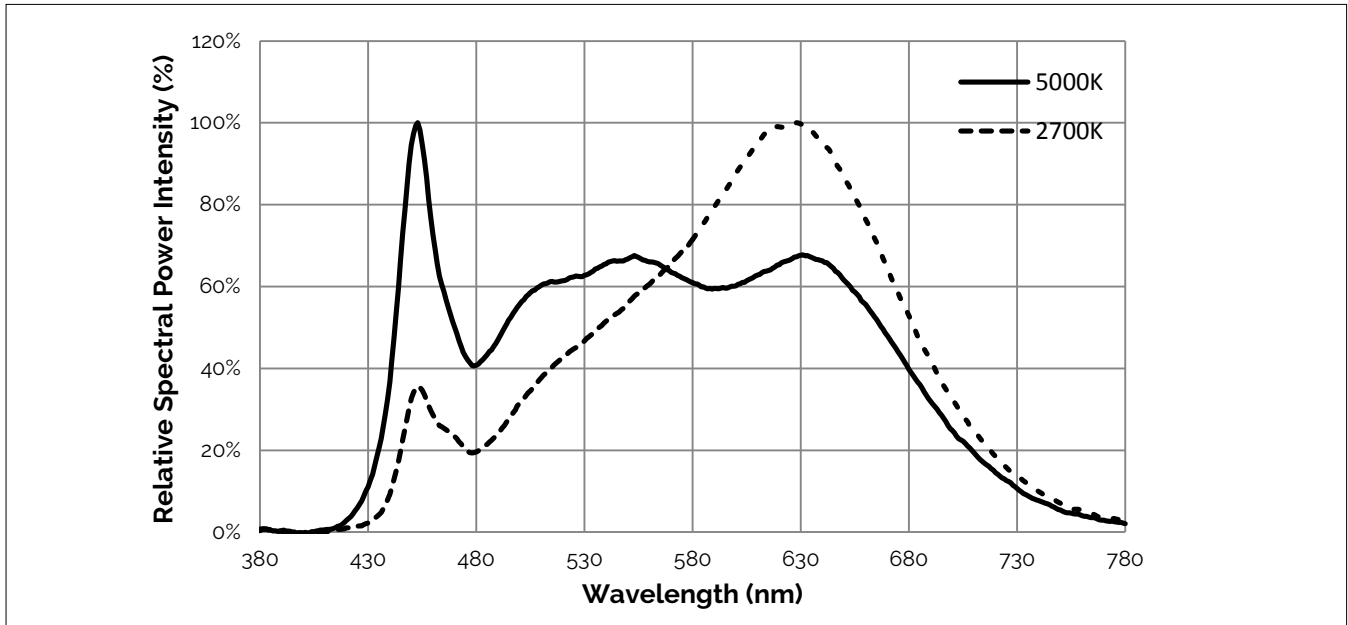


Note for Figure 12:

1. Color spectra measured at nominal current for  $T_j = T_c = 25^\circ\text{C}$ .

# Mechanical Dimensions


**Figure 13: Drawing for Vesta™ Tunable White 280mm Linear**

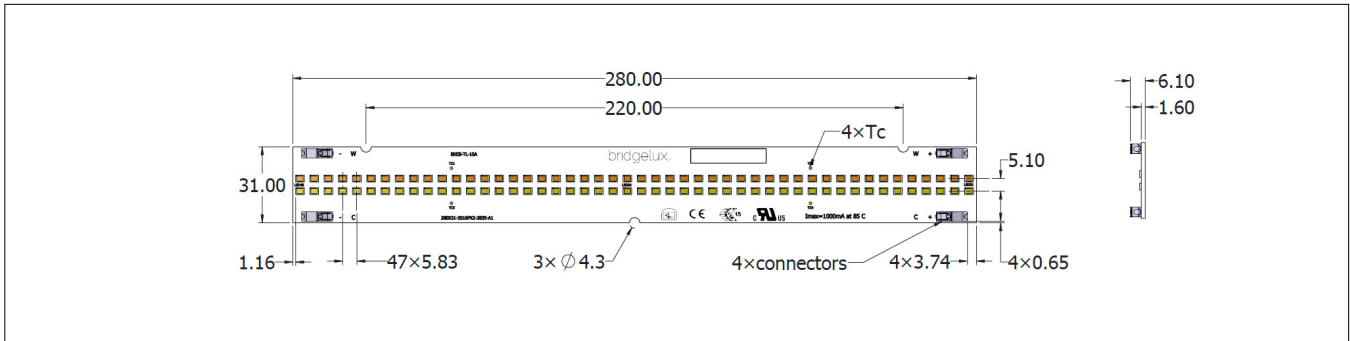

**Table 4: Dimensions for 280mm Linear**

| Parameter        | Specification | Unit |
|------------------|---------------|------|
| Linear length    | 280           | mm   |
| Linear width     | 31            | mm   |
| Linear thickness | 6.1           | mm   |
| PCB thickness    | 1.6           | mm   |

**Figure 14: Drawing for Vesta™ Tunable White 560mm Linear**

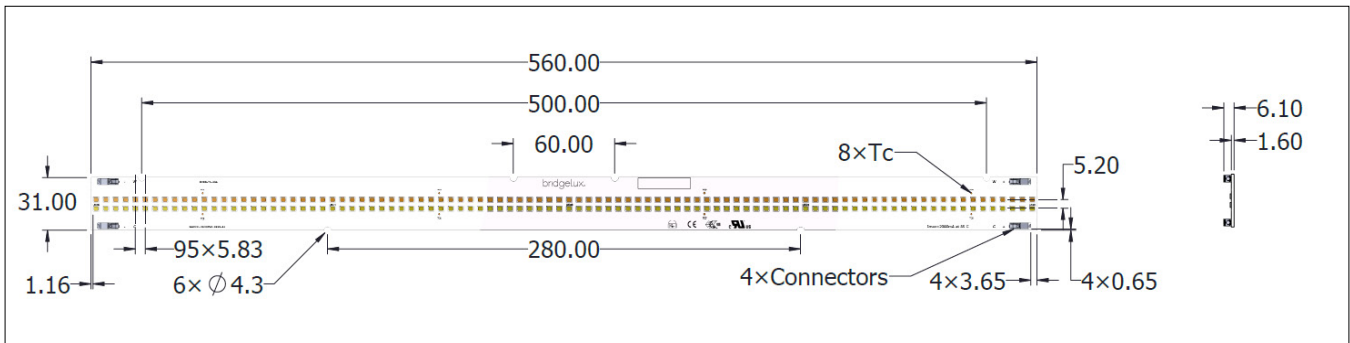

**Table 5: Dimensions for 560mm Linear**

| Parameter        | Specification | Unit |
|------------------|---------------|------|
| Linear length    | 560           | mm   |
| Linear width     | 31            | mm   |
| Linear thickness | 6.1           | mm   |
| PCB thickness    | 1.6           | mm   |

Notes for Figure 13 & 14:

- Solder pads are labeled "+" to denote positive polarity, and "-" to denote negative polarity.
- Drawings are not to scale.
- Drawing dimensions are in millimeters.
- Unless otherwise specified, the tolerances are  $\pm 0.10\text{mm}$ .


# Mechanical Dimensions

**Table 6:** Connector and wiring

| Parameter                | Specification |
|--------------------------|---------------|
| Input wire cross-section | 18-24 AWG     |
| Terminal strip length    | 7-9 mm        |

# Color Binning Information

**Figure 15: Graph of Test Bins in xy Color Space**

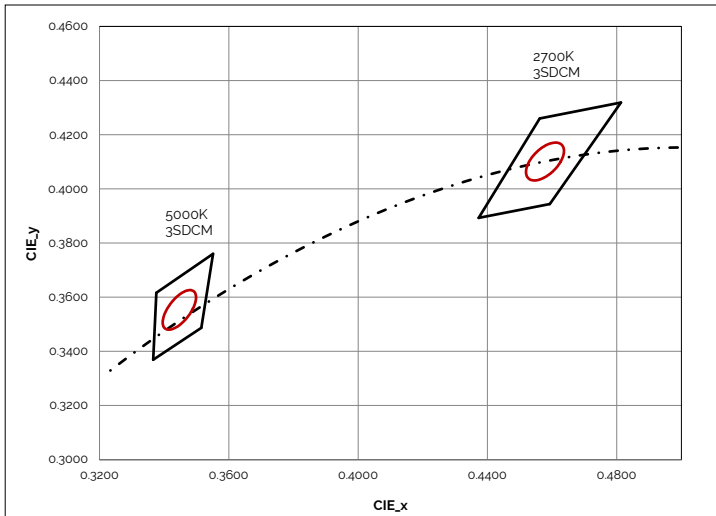


Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Table 7: Bin Coordinates and Associated Typical CCT**

| Bin Code                         | 2700K            | 5000K            |
|----------------------------------|------------------|------------------|
| ANSI Bin<br>(for reference only) | (2580K - 2870K)  | (4745K - 5311K)  |
| 3 (3SDCM)                        | (2651K - 2794K)  | (4835K-5215K)    |
| Center Point (x,y)               | (0.4578, 0.4101) | (0.3447, 0.3553) |

# Packaging and Labeling

**Figure 16: Vesta Series Packaging and Labeling**

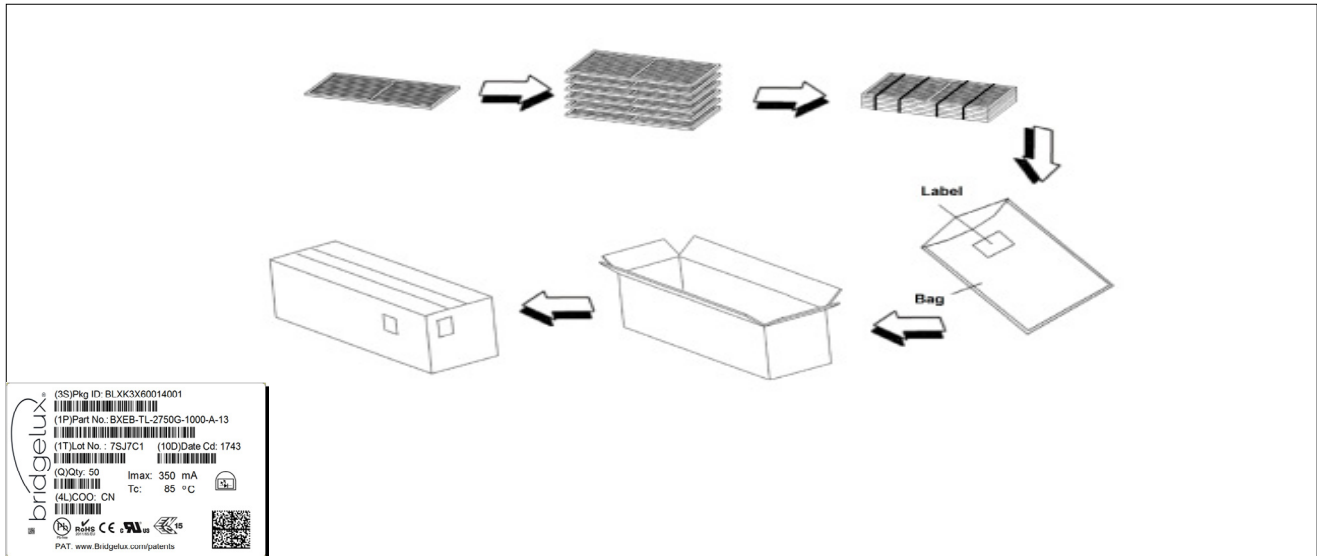

**Table 8: Packaging Structure**

| 280mm     | Tray                    | Box                       |
|-----------|-------------------------|---------------------------|
| Quantity  | 32                      | 160                       |
| Dimension | 63 cm x 39 cm x 2.37 cm | 63,7 cm x 41,7 cm x 15 cm |
| 560mm     | Tray                    | Box                       |
| Quantity  | 16                      | 80                        |
| Dimension | 63 cm x 39 cm x 2.37 cm | 63,7 cm x 41,7 cm x 15 cm |

**Figure 17: Product Labeling**

Bridgelux Vesta Series Tunable White Linears contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the linear product.



Vesta Series Linear  
1ft 1000lm 500mA

Customer Use- 2D Barcode  
Scannable barcode provides  
product part number and other  
Bridgelux internal production  
information.

# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vesta Series product family. For a list of resources under development, visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vesta Series Tunable White Linears are available in both IGES and STEP formats. Please contact your Bridgelux sales representative for assistance.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the linear products. Please consult Bridgelux Application Note for additional information.

## CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux Vesta Series is in accordance with IEC/TR62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires. Vesta Series Tunable White Linears are classified as Risk Group 1 when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

## CAUTION: RISK OF BURN

Do not touch the Vesta Series Tunable White Linears during operation. Allow the linear products to cool for a sufficient period of time before handling. The Vesta Series Tunable White Linears may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the linear products or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the linear products.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the linear products. Use the mechanical features of the linear product housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## STANDARD TEST CONDITIONS

Unless otherwise stated, the linear product testing is performed at the nominal drive current.

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.



# About Bridgelux: We Build Light That Transforms

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**bridgelux.com**  
**twitter.com/Bridgelux**  
**facebook.com/Bridgelux**  
**youtube.com/user/Bridgelux**  
**linkedin.com/company/bridgelux-inc-\_2**  
**WeChat ID: BridgeluxInChina**



46430 Fremont Blvd  
Fremont, CA 94538  
Tel (925) 583-8400  
Fax (925) 583-8410  
**www.bridgelux.com**

© 2017 Bridgelux, Inc. All rights reserved 2017. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. and Vesta Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

**Bridgelux Vesta Series Tunable White Linear Data Sheet DS154 Rev. A (10/2017)**

单击下面可查看定价，库存，交付和生命周期等信息

[>>Bridgelux\(普瑞光电\)](#)