

Gas Discharge Tube (GDT) Data Sheet

Features

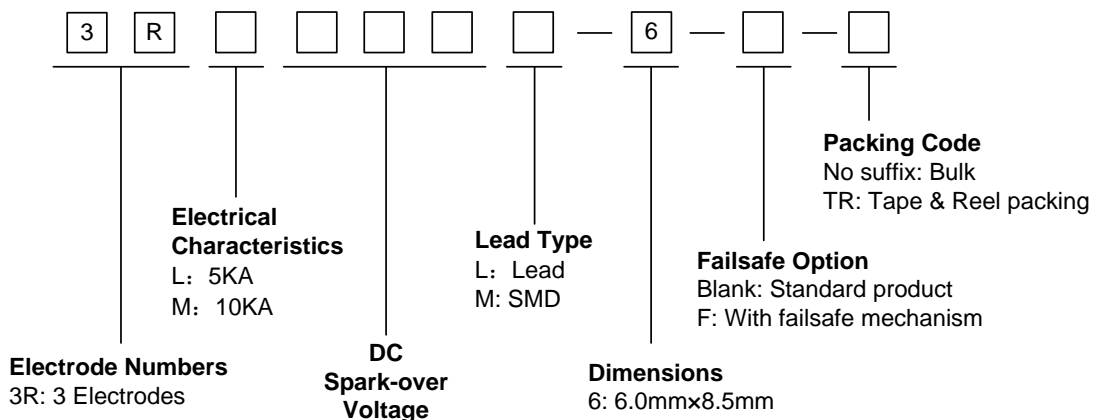
- Provide ultra-fast response to surge voltage from slow-rising surge of 100V/s to rapid-rising surge of 1KV/μs
- Stable breakdown voltage
- High insulation resistance
- Low capacitance (≤2pF)
- High holdover voltage
- Large absorbing transient current capability
- Micro-Gap Design
- Size: 6.0mm*8.5mm
- Storage and operating temperature: -40°C ~ +85°C
- Meets MSL level 1, per J-STD-020
- Safety certification: E244458



Applications

- Repeaters, Modems
- Telephone Interface, Line cards
- Data communication equipment
- Line test equipment

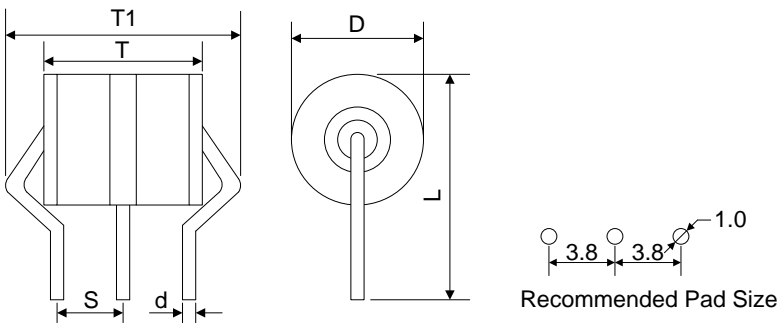
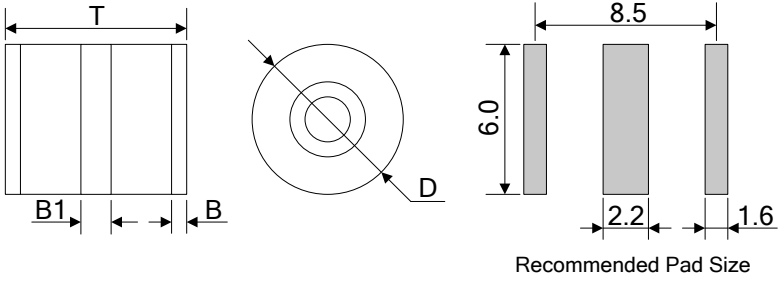
Part Number Code



Marking

B : BrightKing Logo
 3RL090-6 : Device Marking Code
 YXXX : Date Code

Dimensions

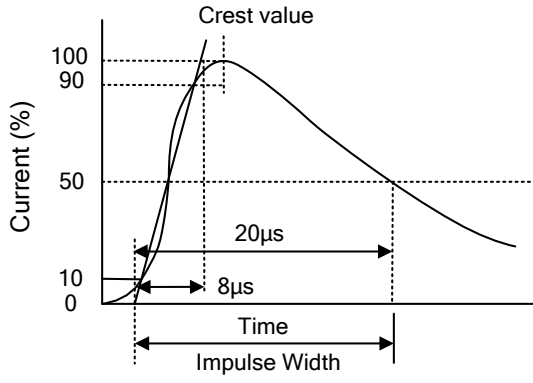
| L Type | Symbol | Dimension (mm) | |
|---|---|----------------|------------|
| | | Spec. | Tolerance |
|  | D | 6.0 | +0.2, -0.5 |
| | T | 8.5 | ±0.5 |
| | T1 | 15.0 | Max. |
| | L | 16.0 | Max. |
| L-F Type | S | 3.8 | ±0.3 |
| | d | 0.8 | ±0.1 |
| | R1 | 7.8 | ±0.4 |
| | R2 | 6.3 | ±0.3 |
| M Type | D | 6.0 | ±0.2 |
| | T | 8.5 | ±0.5 |
| | B | 1.0 | ±0.1 |
| | B1 | 1.5 | ±0.2 |
| |  | | |

Electrical Characteristics

| Part Number | | DC Spark-over Voltage | Maximum Impulse Spark-over Voltage | Nominal Impulse Discharge Current | Alternating Discharge Current | Impulse Life | Minimum Insulation Resistance | | Maximum Capacitance | Device Marking Code |
|-------------|-----------|-----------------------|------------------------------------|-----------------------------------|-------------------------------|-------------------------|-------------------------------|---------------|---------------------|---------------------|
| | | 100V/s | 1000V/ μ s | 8/20 μ s 10times | 50Hz, 1sec | 10/1000 μ s 100A | Test Voltage | (G Ω) | 1MHz | |
| | | (V) | (V) | (KA) | (A) | (times) | DC(V) | | (pF) | |
| 3RL075L-6 | 3RL075M-6 | 75 \pm 20% | 750 | 5.0 | 5.0 | 200 | 25 | 1.0 | 2.0 | 3RL075-6 |
| 3RL090L-6 | 3RL090M-6 | 90 \pm 20% | 750 | 5.0 | 5.0 | 200 | 50 | 1.0 | 2.0 | 3RL090-6 |
| 3RL150L-6 | 3RL150M-6 | 150 \pm 20% | 800 | 5.0 | 5.0 | 200 | 100 | 1.0 | 2.0 | 3RL150-6 |
| 3RL230L-6 | 3RL230M-6 | 230 \pm 20% | 800 | 5.0 | 5.0 | 200 | 100 | 1.0 | 2.0 | 3RL230-6 |
| 3RL250L-6 | 3RL250M-6 | 250 \pm 20% | 800 | 5.0 | 5.0 | 200 | 100 | 1.0 | 2.0 | 3RL250-6 |
| 3RL300L-6 | 3RL300M-6 | 300 \pm 20% | 900 | 5.0 | 5.0 | 200 | 100 | 1.0 | 2.0 | 3RL300-6 |
| 3RL350L-6 | 3RL350M-6 | 350 \pm 20% | 900 | 5.0 | 5.0 | 200 | 100 | 1.0 | 2.0 | 3RL350-6 |
| 3RL470L-6 | 3RL470M-6 | 470 \pm 20% | 950 | 5.0 | 5.0 | 200 | 250 | 1.0 | 2.0 | 3RL470-6 |
| 3RL600L-6 | 3RL600M-6 | 600 \pm 20% | 1300 | 5.0 | 5.0 | 200 | 250 | 1.0 | 2.0 | 3RL600-6 |
| 3RM075L-6 | 3RM075M-6 | 75 \pm 20% | 750 | 10 | 10 | 300 | 25 | 1.0 | 2.0 | 3RM075-6 |
| 3RM090L-6 | 3RM090M-6 | 90 \pm 20% | 750 | 10 | 10 | 300 | 50 | 1.0 | 2.0 | 3RM090-6 |
| 3RM150L-6 | 3RM150M-6 | 150 \pm 20% | 800 | 10 | 10 | 300 | 100 | 1.0 | 2.0 | 3RM150-6 |
| 3RM230L-6 | 3RM230M-6 | 230 \pm 20% | 800 | 10 | 10 | 300 | 100 | 1.0 | 2.0 | 3RM230-6 |
| 3RM250L-6 | 3RM250M-6 | 250 \pm 20% | 800 | 10 | 10 | 300 | 100 | 1.0 | 2.0 | 3RM250-6 |
| 3RM300L-6 | 3RM300M-6 | 300 \pm 20% | 900 | 10 | 10 | 300 | 100 | 1.0 | 2.0 | 3RM300-6 |
| 3RM350L-6 | 3RM350M-6 | 350 \pm 20% | 900 | 10 | 10 | 300 | 100 | 1.0 | 2.0 | 3RM350-6 |
| 3RM470L-6 | 3RM470M-6 | 470 \pm 20% | 950 | 10 | 10 | 300 | 250 | 1.0 | 2.0 | 3RM470-6 |
| 3RM600L-6 | 3RM600M-6 | 600 \pm 20% | 1300 | 10 | 10 | 300 | 250 | 1.0 | 2.0 | 3RM600-6 |

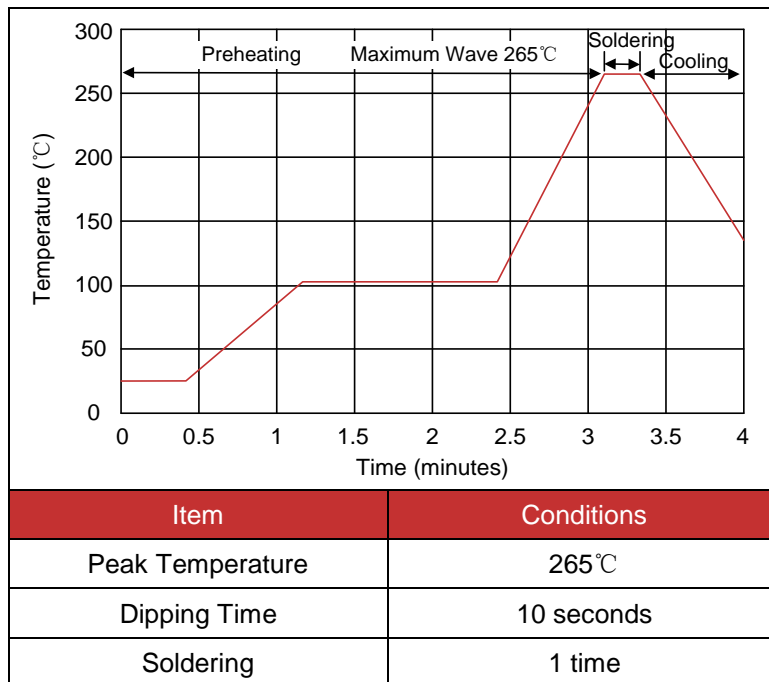
Electrical Ratings

| Items | Test Condition/Description | Requirement |
|------------------------------------|--|-----------------------------|
| DC Spark-over Voltage | The voltage is measured with voltage ramp $dv/dt=100V/s$. Test is between each side electrode and center electrode. | To meet the specified value |
| Maximum Impulse Spark-over Voltage | The maximum impulse spark-over voltage is measured with voltage ramp $dv/dt=1000V/\mu s$. Test is between each side electrode and center electrode. | |

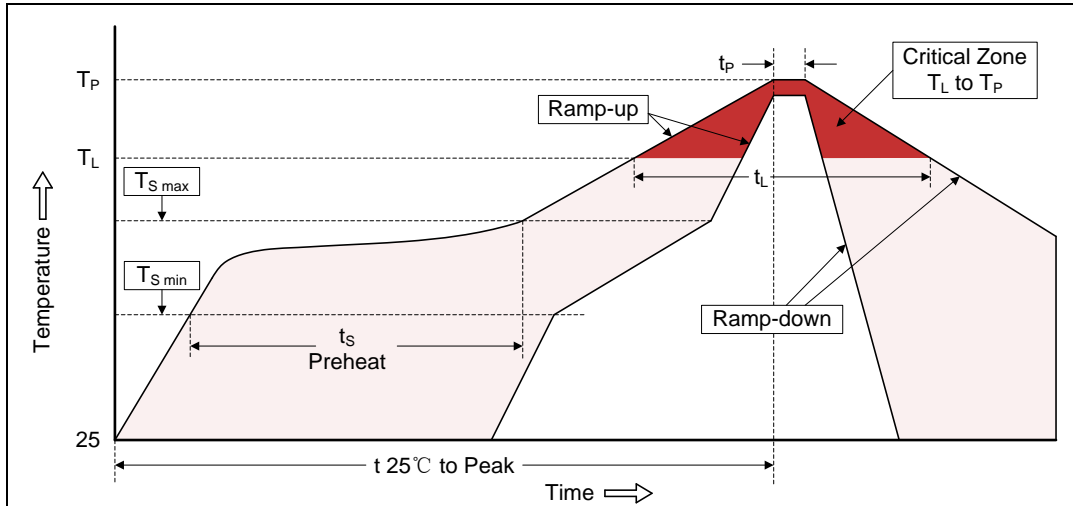
| | | |
|--------------------------------------|--|--|
| <p>Impulse Discharge Current</p> | <p>Maximum surge current that can be applied through center electrode with 8/20μs waveform, for 10 times with 3min interval time, which will be equally divided between each side electrode to center electrode, without causing the DC breakdown voltage to change more than 25% from its initial measured value.</p>  | |
| <p>Alternating Discharge Current</p> | <p>Rated RMS value of AC current at 50Hz, 1 sec. for 10 times with interval time 3 min. DC spark-over voltage shall not change more than $\pm 25\%$ from its initial value. Test is between each side electrode and center electrode. IR > 10⁸ ohms (-20%, +30% for 70~90V).</p> | |
| <p>Insulation Resistance</p> | <p>The resistance of gas tube shall be measured between each side electrodes and center electrode.</p> | |
| <p>Capacitance</p> | <p>The capacitance of gas tube shall be measured between each side electrodes and center electrode. Test frequency: 1MHz</p> | |

Recommended Soldering Conditions

Wave Soldering



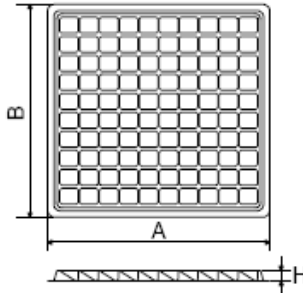
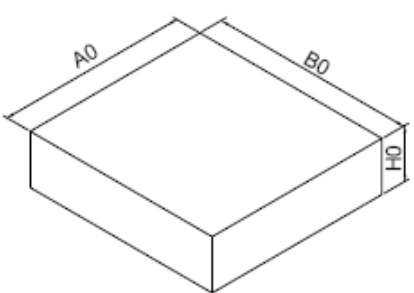
Reflow Soldering



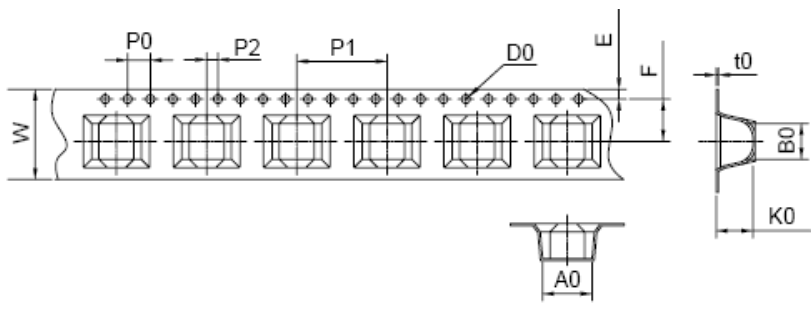
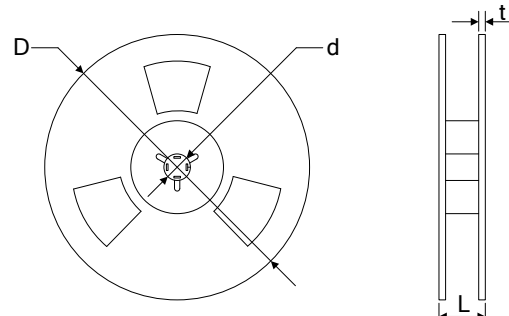
| Profile Feature | Pb-Free Assembly |
|--|------------------|
| Average ramp-up rate (T_L to T_P) | 3°C/second max. |
| Preheat | |
| -Temperature Min ($T_{S\ min}$) | 150°C |
| -Temperature Max ($T_{S\ max}$) | 200°C |
| -Time (min to max) (t_s) | 60-180 seconds |
| $T_{S\ max}$ to T_L | |
| -Ramp-up Rate | 3°C/second max. |
| Time maintained above: | |
| -Temperature (T_L) | 217°C |
| -Time (t_L) | 60-150 seconds |
| Peak Temperature (T_P) | 260°C |
| Time within 5°C of actual Peak Temperature (t_p) | 20-40 seconds |
| Ramp-down Rate | 6°C/second max. |
| Time 25°C to Peak Temperature | 8 minutes max. |

Packaging

Axial Packing (Bulk)

| Skin packing |  | Dimension (mm) | | |
|------------------|---|------------------|-------|-----------|
| | | Symbol | Spec. | Tolerance |
| | | A | 217.0 | ±2.0 |
| | | B | 207.0 | ±2.0 |
| | | H | 10.3 | ±0.5 |
| Quantity: 100pcs | | | | |
| Inner box |  | A0 | 225.0 | ±2.0 |
| | | B0 | 210.0 | ±2.0 |
| | | H0 | 60.0 | ±2.0 |
| | | Quantity: 500pcs | | |

SMD Packing (Tape & Reel)

| Tape |  | Dimension (mm) | | |
|------------------|---|----------------|---|-----------|
| | | Symbol | Spec. | Tolerance |
| | | W | 16.00 | ±0.20 |
| | | P0 | 4.00 | ±0.10 |
| | | P1 | 16.00 | ±0.10 |
| | | P2 | 2.00 | ±0.10 |
| | | D0 | 1.55 | ±0.05 |
| | | E | 1.75 | ±0.10 |
| | | F | 7.50 | ±0.10 |
| | | A0 | 8.80 | ±0.10 |
| | | K0 | 6.20 | ±0.10 |
| | | B0 | 6.35 | ±0.10 |
| | | t0 | 0.50 | ±0.05 |
| | | Reel |  | D |
| d | 13.00 | | | ±0.50 |
| L | 20.00 | | | ±2.00 |
| t | 2.00 | | | ±0.20 |
| Quantity: 600pcs | | | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Brightking\(君耀电子\)](#)