

K DETAIL 2 : 1





示意图 SCHEMATIC

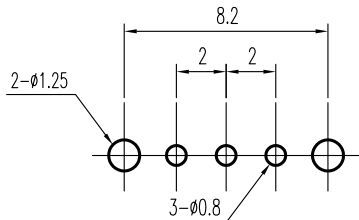

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	20 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60±5 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 500 V (50~60HZ) 60±5 Sec.

操作力 Operating Force (gf)	A → B	B → A
	250 ± 100	250 ± 100
负荷寿命 Operating Life With Load	10,000 次 Cycles	

6	端子	TERMINAL	C2680R	3	Ag PLATED
5	基板	TERMINAL BASE	PHENOL RESIN	1	YELLOW
4	接触片	CONTACT	C5210R	1	Ag CLAD
3	弹片	SPRING PLATE	SUS	1	NATURAL
2	胶柄	KNOB	PA	1	VG 2-8
1	铁壳	FRAME	S P C C	1	Sn PLATED
序号 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	

标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM2691			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SLIDE SWITCH		ITEM NO	SS-12D07-VG	GA PA
UNDER 1	± 0.10	DRAWN	杨静华	06-06-15	VERSION	A01	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-06-15	SCALE		UNIT mm
OVER 10	± 0.50	APPROVED	高洪	06-06-15	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.

单击下面可查看定价，库存，交付和生命周期等信息

[>>C&K](#)