

FEATURES

- Able to be used at wide temperature from -25°C to 85°C
- Long life Endurance : 1,000 hours at +85°C
- RoHS directive compliant / No Explosion Safety

APPLICATIONS

- Memory back-up for Video, Audio, Cameras, CCTV, Printer, Camcorder, Telephones, Car stereo, E-meter, Toy, Computer, Notebook PC, Rice cooker, Home network etc.




PART NUMBER SYSTEM

<u>CBW</u>	<u>5R5</u>	<u>104</u>	<u>C</u>	<u>F</u>	<u>*</u>
Series	Rated Voltage	Capacitance	Type	RoHS	Special Code

GENERAL SPECIFICATIONS / DIMENSIONS

Item	Performance				
Operating temperature	-25°C to +85°C				
Capacitance range	0.1F to 0.33F				
Capacitance tolerance	- 20% to + 80% (at 25°C)				
Rated voltage	5.5 VDC				
Nominal capacitance & Resistance	Nominal capacitance (F)	0.1	0.22	0.33	
	Nominal resistance (Ω)	120	75	75	
Temperature characteristics	Capacitance change: Within ±50% of initial measured value at +25°C Internal resistance: Within ±500% of initial measured value at +25°C				
Endurance (At rated voltage & max. operating temp)	After 1000 hours: Capacitance change: ±30% of initial rated value Internal resistance: Within 4 times of initial specified value				
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.				

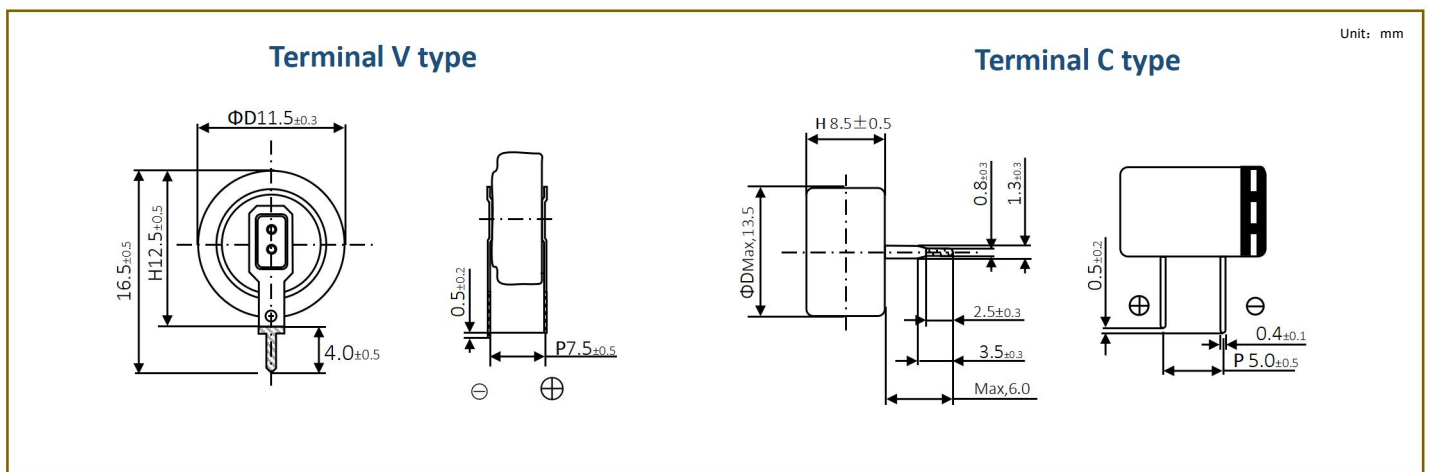

STANDARD PRODUCTS

Part Number	Working Voltage (V DC)	Rated Cap. (F)	Internal resistance (Ω) at 1 kHz	V type(mm)			C type(mm)		
				ΦD	H	P	ΦD	H	P
CBW 5R5 104 ()	5.5	0.1	≤120	11.5	12.5	7.5	13.5	8.5	5.0
CBW 5R5 224 ()	5.5	0.22	≤75	11.5	12.5	7.5	13.5	8.5	5.0
CBW 5R5 334 ()	5.5	0.33	≤75	11.5	12.5	7.5	13.5	8.5	5.0

单击下面可查看定价，库存，交付和生命周期等信息

[>>CDA\(智烽维\)](#)