

## WS3A015065A

### Silicon Carbide Schottky Diode

$V_{RRM}$	=	650	V
$I_F (T_C \leq 135^\circ\text{C})$	=	18	A
$Q_C$	=	36	nC

#### Features

- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on  $V_F$
- Temperature-independent Switching
- 175°C Operating Junction Temperature


#### Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

#### Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station

#### Package



TO-220-2



Part Number	Package	Marking
WS3A015065A	TO-220-2	WS3A015065A

#### Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{RRM}$	Repetitive Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
$V_{RSM}$	Surge Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
$V_R$	DC Blocking Voltage	650	V	$T_C = 25^\circ\text{C}$	
$I_F$	Forward Current	18 15	A	$T_C \leq 135^\circ\text{C}$ $T_C \leq 149^\circ\text{C}$	
$I_{FSM}$	Non-Repetitive Forward Surge Current	135	A	$T_C = 25^\circ\text{C}$ , $t_p = 8.3\text{ms}$ , Half Sine Wave	
$P_{tot}$	Power Dissipation	158	W	$T_C = 25^\circ\text{C}$	Fig.3
$T_C$	Maximum Case Temperature	149	$^\circ\text{C}$		
$T_J, T_{STG}$	Operating Junction and Storage Temperature	-55 to 175	$^\circ\text{C}$		
	TO-220 Mounting Torque	1	Nm	M3 Screw	

## Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$V_F$	Forward Voltage	1.4 1.7	1.65 2.3	V	$I_F = 15A, T_J = 25^\circ C$ $I_F = 15A, T_J = 175^\circ C$	Fig.1
$I_R$	Reverse Current	2 10	20 200	$\mu A$	$V_R = 650V, T_J = 25^\circ C$ $V_R = 650V, T_J = 175^\circ C$	Fig.2
C	Total Capacitance	865 88 72	/	pF	$V_R = 0V, T_J = 25^\circ C, f = 1MHz$ $V_R = 200V, T_J = 25^\circ C, f = 1MHz$ $V_R = 400V, T_J = 25^\circ C, f = 1MHz$	Fig.5
$Q_C$	Total Capacitive Charge	36	/	nC	$V_R = 650V, I_F = 15A$ $di/dt = 200A/\mu s, T_J = 25^\circ C$	Fig.4

## Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.95	$^\circ C/W$	Fig.6
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	80	$^\circ C/W$	
$T_{sold}$	Soldering Temperature	260	$^\circ C$	

## Typical Performance

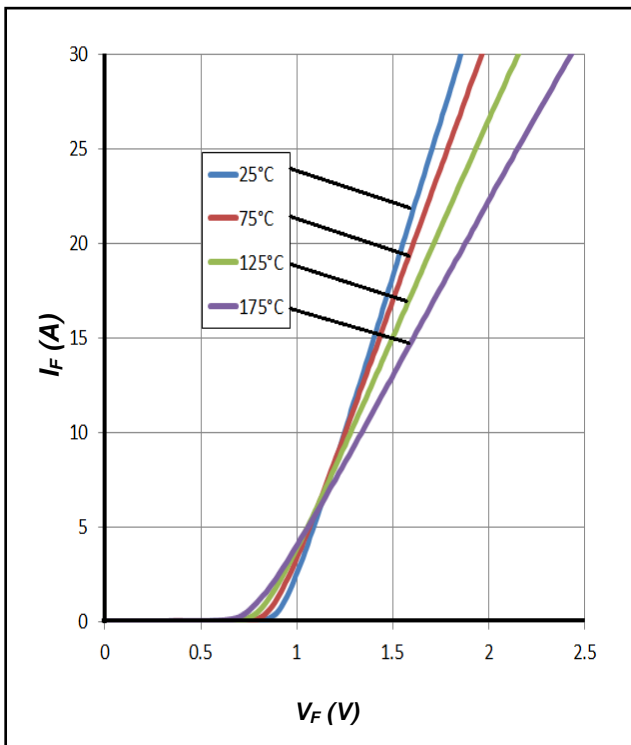


Figure 1. Forward Characteristics

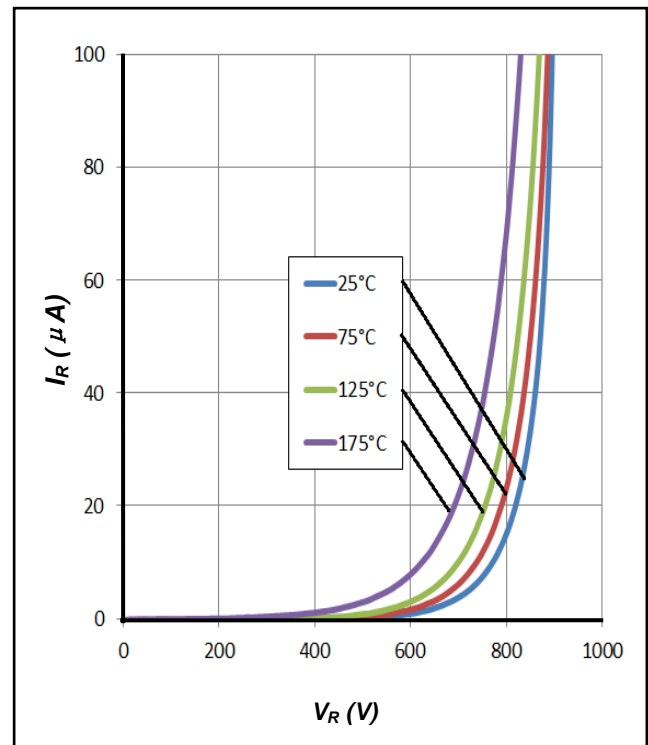


Figure 2. Reverse Characteristics

**Typical Performance**

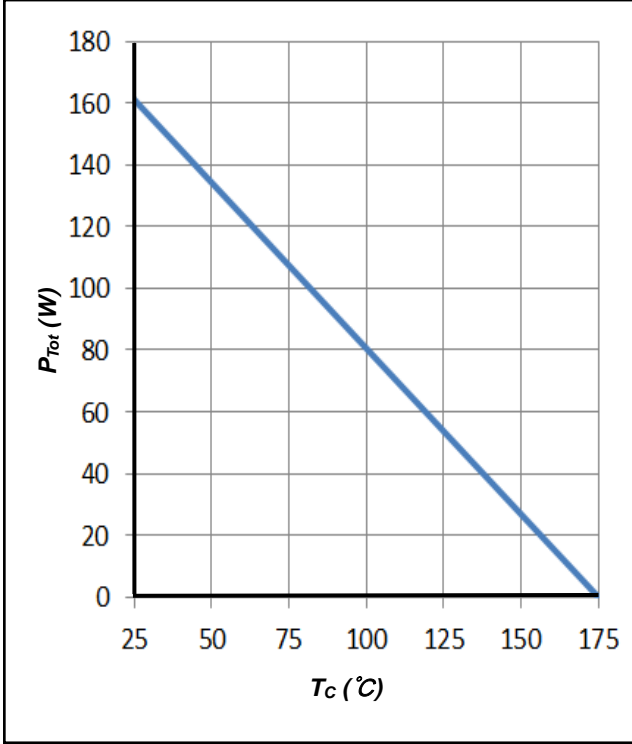


Figure 3. Power Derating

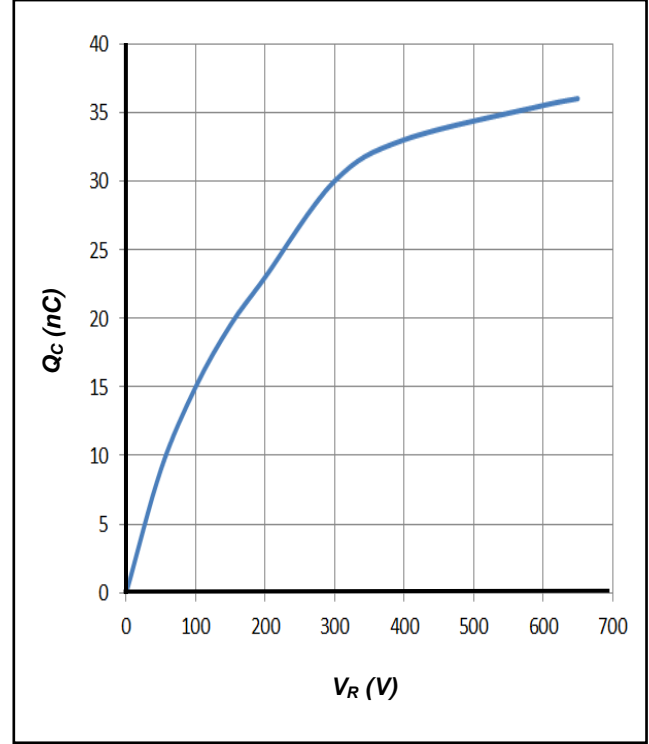


Figure 4. Total Capacitive Charge vs. Reverse Voltage

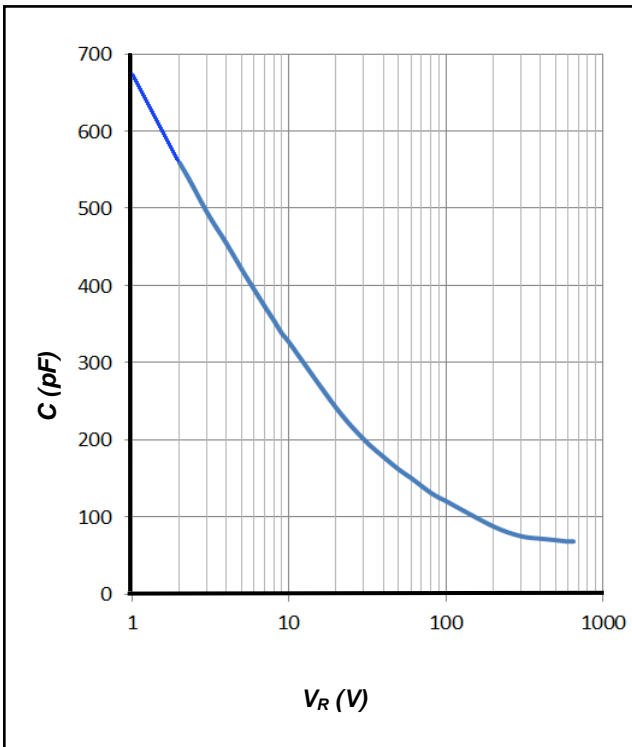


Figure 5. Total Capacitance vs. Reverse Voltage



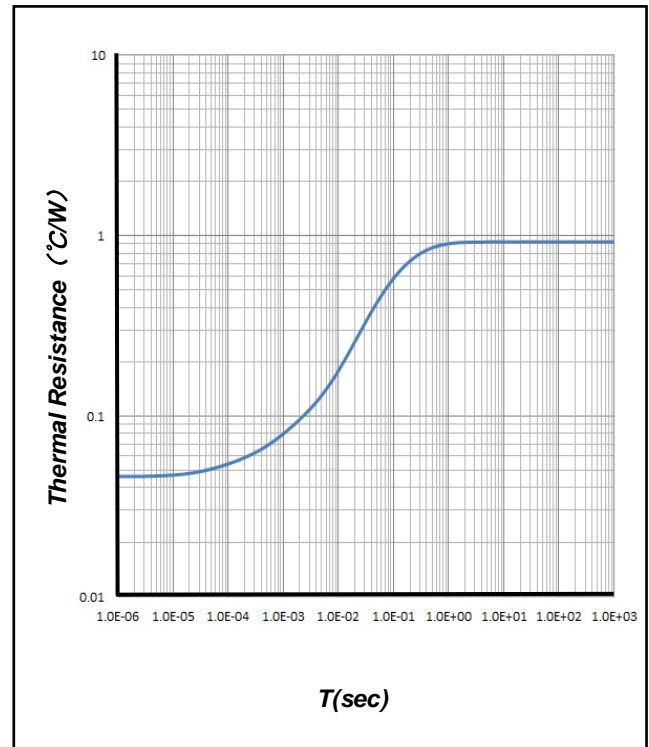


Figure 6. Transient Thermal Impedance

**Package Dimensions**

Package TO-220-2

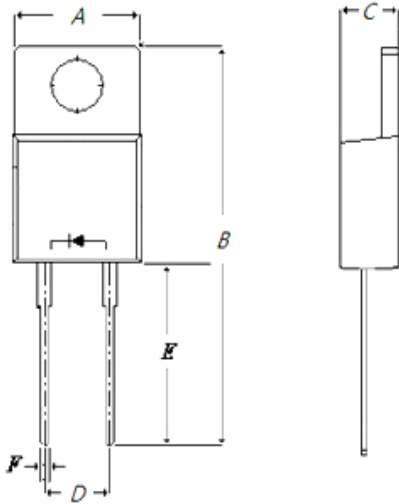

Symbol	Min. (mm)	Typ. (mm)	Max. (mm)
A	9.17	10.08	10.91
B	27.00	28.58	30.00
C	3.89	4.50	5.00
D	4.20	5.10	5.80
E	11.70	13.30	14.97
F	0.50	0.80	1.21



## Notes

- 1) Before using our products, please contact our marketing managers and get the latest specifications.
- 2) Ongoing efforts are being made to improve the reliability and quality of the products by CETC, but the semiconductors can malfunction due to various factors.  
Therefore, in order to prevent artificial damage or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. CETC doesn't have responsibility for any damages arising from the use of our products beyond the rating specified by CETC.
- 3) All the information contained in this document, such as the examples of application circuits, circuit constants, is provided only to illustrate the standard usage and operations of the products. The other relevant conditions must be taken into consideration when designing circuits for mass production.
- 4) The information specified in this document is intended only to show the typical functions and examples of application circuits for the products. CETC does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by CETC or any other parties. CETC shall have no responsibility whatsoever for any dispute arising from the use of such technical information.
- 5) The products specified in this document are not designed to be radiation tolerant.
- 6) For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a CETC representative: transportation equipment (cars, ships, trains, etc.), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.
- 7) Do not use our products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems and submarine repeaters.
- 8) CETC shall not be responsible for any damages or injury caused by non-compliance with the recommended usage conditions and specifications contained in this document.
- 9) CETC has used reasonable care to ensure the accuracy of the information contained in this document. However, CETC does not guarantee the information contained in this document is totally correct, and CETC doesn't have responsibility for any damages arising from any inaccuracy or misprint of such information.
- 10) Please use the products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a CETC marketing manager. CETC doesn't have responsibility for any damages or losses arising from disobedience to any relevant laws or regulations.
- 11) When providing our products and technologies contained in this document to other countries or regions, you must comply with the procedures and provisions stipulated by all the applicable export laws and regulations, including but not limited to the relevant laws or regulations.
- 12) The information contained in this document is subject to change without notice.
- 13) Neither part nor all of this file is allowed to be reprinted or reproduced without authorization of CETC.
- 14) CETC reserves the right to the final interpretation.

| ADD: No.166 Zhengfang Middle Road, Jiangning District, Nanjing, Jiangsu Province  
| Contact Person: YONG YANG, NAN WANG  
| TEL: 025-68005861, 13770574989

单击下面可查看定价，库存，交付和生命周期等信息

[>>CETC\(中电国基南方\)](#)