

**Chip Bead ABSJ Series**

**Automotive  
AEC-Q200**

RoHS Compliant  
Halogen Free  
REACH Compliant



- Noise  
Suppression
- Shield
- Multilayer
- Ferrite
- General  
Signal line

**Part Numbering**

A	BSJ	00	100505	600	Y	00
Grade	Series Name	Control Code	Dimensions Code (mm)	Impedance (Ω)	Tolerance	Internal Code
			100505 1.0x0.5x0.5	600 60	Y ±25%	
			160808 1.6x0.8x0.8	121 120		
				102 1000		


This specification applies to Multilayer Chip ferrite Bead for Automotive Electronics based on AEC-Q200 except for Power train and Safety.

Chip Bead ABSJ Series

Automotive  
AEC-Q200


ABSJ00100505 Type

■ Dimensions

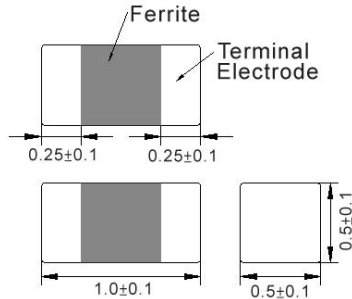

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics










Part No.	Impedance (Ω)	Test Freq.	RDC (Ω)Max.	Rated Current (mA)Max.
ABSJ00100505300Y00	30	100 MHz,200 mV	0.20	500
ABSJ00100505600Y00	60	100 MHz,200 mV	0.20	500
ABSJ00100505121Y00	120	100 MHz,200 mV	0.25	500
ABSJ00100505221Y00	220	100 MHz,200 mV	0.40	400
ABSJ00100505301Y00	300	100 MHz,200 mV	0.50	300
ABSJ00100505481Y00	480	100 MHz,200 mV	0.50	300
ABSJ00100505601Y00	600	100 MHz,200 mV	0.60	300
ABSJ00100505102Y00	1000	100 MHz,200 mV	0.95	200
ABSJ00100505152Y00	1500	100 MHz,200 mV	1.15	100

Note: When ordering, please specify tolerance code. Tolerance: Y=±25%

- Operating temperature range - 40°C ~ 125°C
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment:  
Z: HP4291A  
RDC: HP4338B or CHEN HWA 502

ABSJ00100505 Type


Characteristics Graph

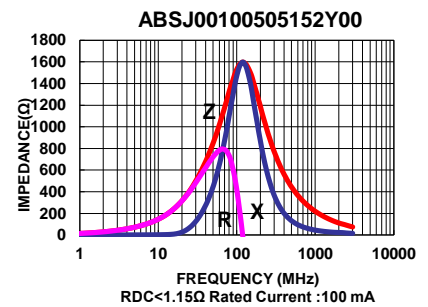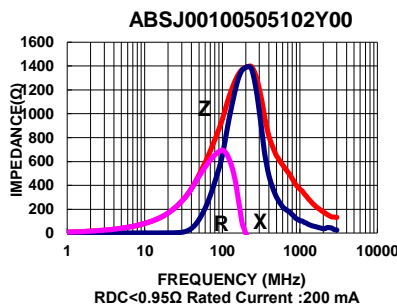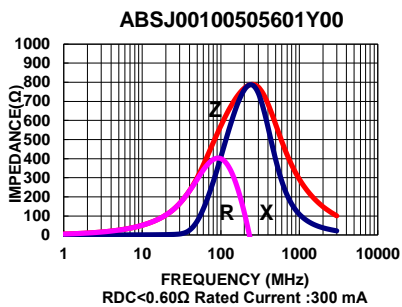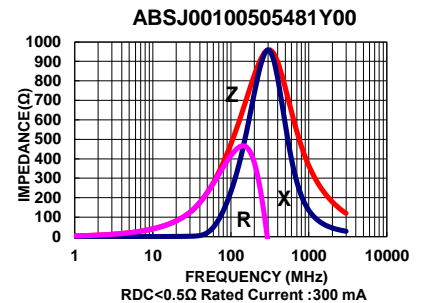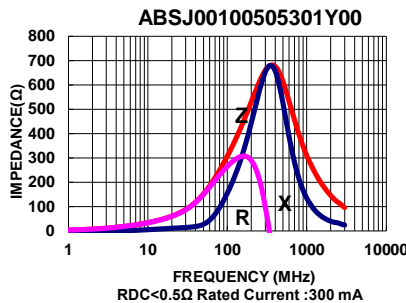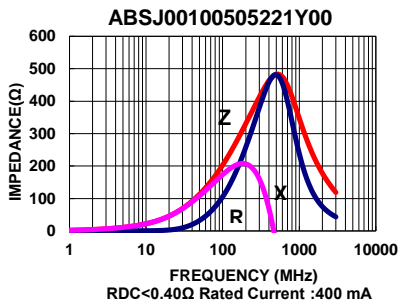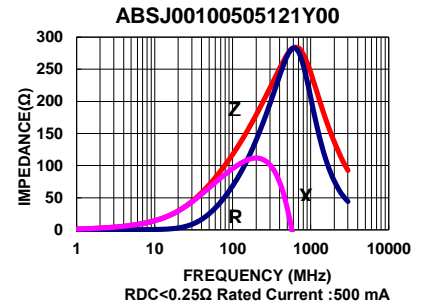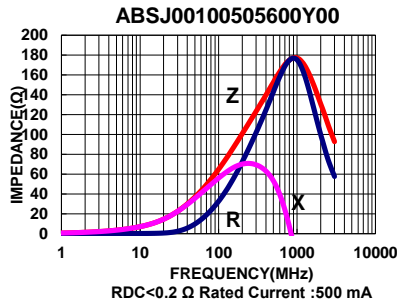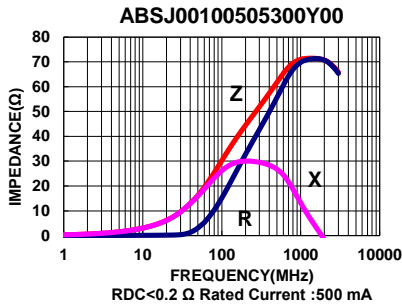

**Chip Bead ABSJ Series** **Automotive AEC-Q200**


**ABSJ00160808 Type**

**Dimensions**

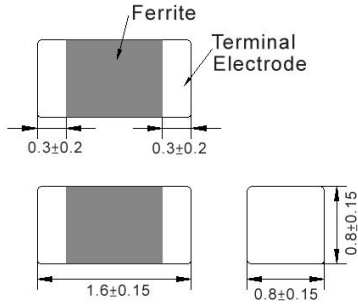

unit:mm

**Recommended Land Pattern**



unit:mm

**Electrical Characteristics**






Part No.	Impedance (Ω)	Test Freq.	RDC (Ω)Max.	Rated Current (mA)Max.
ABSJ00160808121Y00	120	100 MHz,200 mV	0.25	400
ABSJ00160808601Y00	600	100 MHz,200 mV	0.40	400
ABSJ00160808102Y00	1000	100 MHz,200 mV	0.60	300
ABSJ00160808182Y00	1800	100 MHz,200 mV	1.00	200
ABSJ00160808252Y00	2500	100 MHz,200 mV	1.00	200

**Note: When ordering, please specify tolerance code. Tolerance: Y=±25%**

1. Operating temperature range - 40°C ~ 125°C
2. Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
3. Measure Equipment:  
 Z: HP4291A  
 RDC: HP4338B or CHEN HWA 502

ABSJ00160808 Type

Characteristics Graph

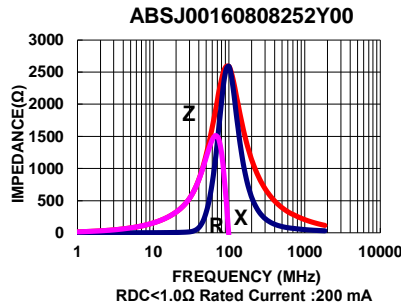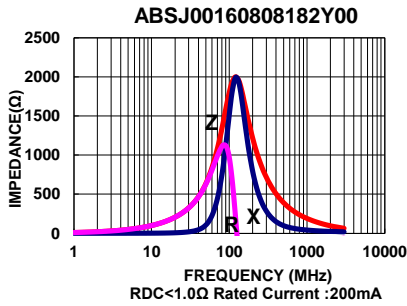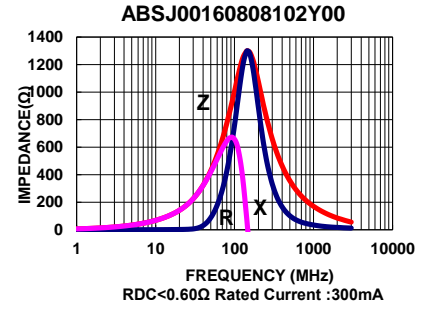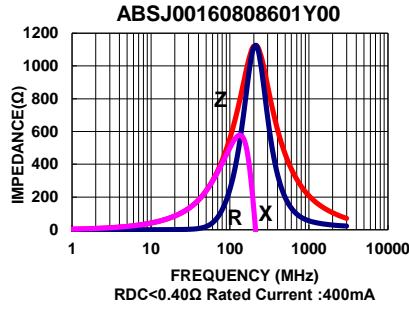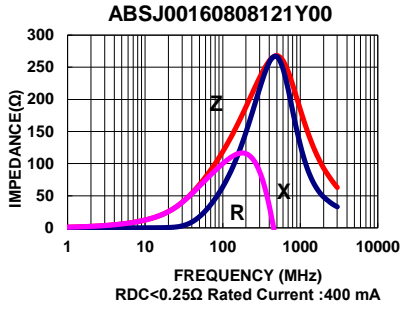


**Chip Bead ABSJ Series**

**Automotive  
AEC-Q200**


**■ Packaging**

**Tape Dimensions**

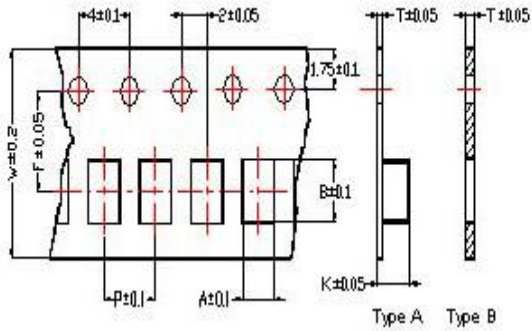


**Tape Material**

Carrier Tape: Polycarbonate (Tape A)  
Carrier Tape: Paper (Tape B)  
Cover Tape: Polystyrene

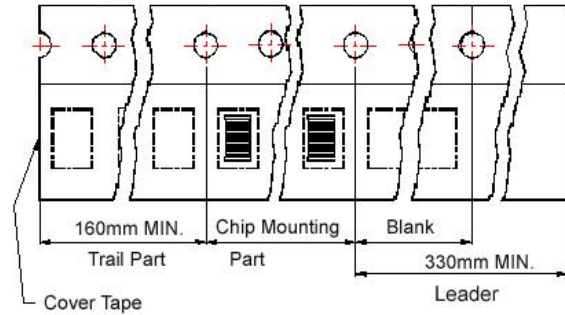

**Reel Dimensions**

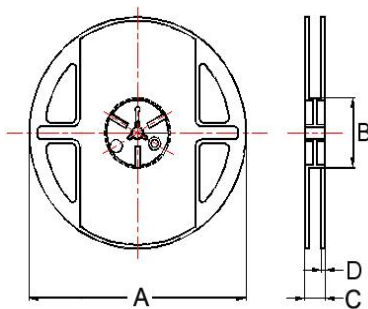

**Dimensions in mm**

TYPE	Tape Dimensions								Reel Dimensions				Quantity
	A	B	T	W	P	F	K	Tape	A	B	C	D	PCS / Reel
ABSJ00100505	0.62	1.12	0.60	8	2	3.5	-	B	178	60	12	2	10000
ABSJ00160808	1.05	1.85	0.95	8	4	3.5	-	B	178	60	12	2	4000

单击下面可查看定价，库存，交付和生命周期等信息

[>>CHILISIN\(奇力新\)](#)