



Molding Power Inductors – BMRx Series

Shape and Dimensions

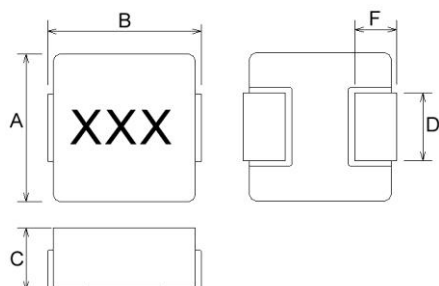

Recommended Pattern

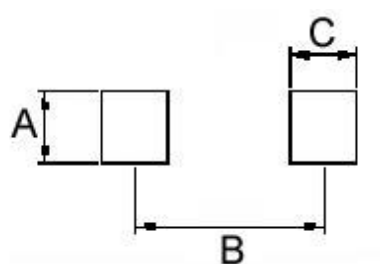

Dimensions in mm

| TYPE | A | B | C | D | F |
|--------------|----------|------------|---------|---------|---------|
| BMRA00050520 | 5.4±0.35 | 5.7±0.2 | 1.8±0.2 | 2.0±0.3 | 1.5±0.3 |
| BMRA00050530 | 5.4±0.35 | 5.7±0.2 | 3.0Max | 2.0±0.3 | 1.5±0.3 |
| BMRB00060612 | 6.6±0.2 | 7.3Max | 1.2 Max | 2.9 | 1.6±0.5 |
| BMRx00060615 | 6.6±0.2 | 7.3Max | 1.3±0.2 | 2.9 | 1.6±0.5 |
| BMRB00060618 | 6.6±0.2 | 7.3Max | 1.6±0.2 | 2.9 | 1.6±0.5 |
| BMRB00060624 | 6.6±0.2 | 7.3Max | 2.4Max | 2.9 | 1.6±0.5 |
| BMRx00060630 | 6.6±0.2 | 7.3Max | 3.0Max | 2.9 | 1.6±0.5 |
| BMRB00060650 | 6.6±0.2 | 7.3Max | 5.0Max | 2.9 | 1.6±0.5 |
| BMRG00101030 | 10.1±0.3 | 11.6Max | 3.0Max | 3.0 | 2.5±0.5 |
| BMRF00101040 | 10.1±0.3 | 11.6Max | 4.0Max | 3.0 | 2.5±0.5 |
| BMRF00131350 | 12.6±0.2 | 13.8Max | 5.0Max | 3.7 | 2.7±0.7 |
| BMRF00131360 | 12.6±0.2 | 13.8Max | 5.8±0.2 | 5.0±0.5 | 2.0±0.5 |
| BMRG00131360 | 12.6±0.2 | 13.8Max | 6.0 Max | 5.0±0.5 | 2.0±0.5 |
| BMRF00171770 | 17.15Max | 17.15±0.35 | 6.8±0.2 | 12±0.3 | 2.5±0.5 |

Dimensions in mm

| TYPE | A | B | C |
|--------------|------|------|------|
| BMRA00050520 | 2.5 | 4.1 | 1.9 |
| BMRA00050530 | 2.5 | 4.1 | 1.9 |
| BMRB00060612 | 3.5 | 6.05 | 2.35 |
| BMRx00060615 | 3.5 | 6.05 | 2.35 |
| BMRB00060618 | 3.5 | 6.05 | 2.35 |
| BMRB00060624 | 3.5 | 6.05 | 2.35 |
| BMRx00060630 | 3.5 | 6.05 | 2.35 |
| BMRB00060650 | 3.5 | 6.05 | 2.35 |
| BMRG00101030 | 4.0 | 9.5 | 3.5 |
| BMRF00101040 | 4.0 | 9.5 | 3.5 |
| BMRF00131350 | 5.0 | 10.5 | 4.0 |
| BMRF00131360 | 5.5 | 10.5 | 4.0 |
| BMRG00131360 | 5.5 | 10.5 | 4.0 |
| BMRF00171770 | 12.8 | 14.7 | 3.5 |

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA00040412R22MA1 | 0.22 | 20 | 100 | 12 | 11.5 | 8.5 |
| BMRA00040412R33MA1 | 0.33 | 20 | 100 | 19 | 8.5 | 6.5 |
| BMRA00040412R47MA1 | 0.47 | 20 | 100 | 25 | 7.0 | 5.0 |
| BMRA00040412R68MA1 | 0.68 | 20 | 100 | 36 | 6.0 | 4.5 |
| BMRA000404121R0MA1 | 1.0 | 20 | 100 | 47 | 5.2 | 4.2 |
| BMRA000404121R5MA1 | 1.5 | 20 | 100 | 75 | 4.0 | 3.25 |
| BMRA000404122R2MA1 | 2.2 | 20 | 100 | 83.5 | 3.5 | 2.75 |
| BMRA000404123R3MA1 | 3.3 | 20 | 100 | 165 | 3.0 | 2.0 |
| BMRA000404124R7MA1 | 4.7 | 20 | 100 | 195 | 2.8 | 1.8 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 - L : WK 3260B or WK 6500P, 100kHz 0.5V
 - RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

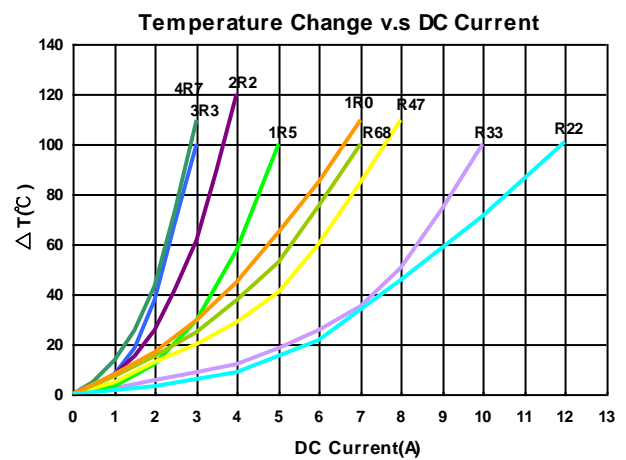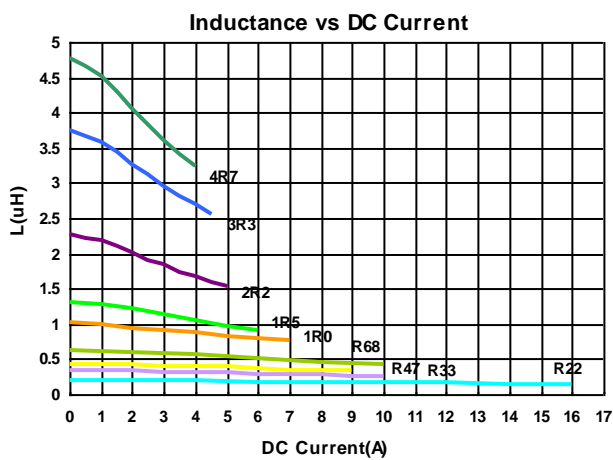

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BMRB000404124R7MA1 | 4.7 | 20 | 100 | 195(175) | 2.2(2.8) | 1.6(1.8) |
| BMRB000404126R8MA1 | 6.8 | 20 | 100 | 368(320) | 1.9(2.2) | 1.5(1.7) |
| BMRB000404128R2MA1 | 8.2 | 20 | 100 | 480(420) | 1.6(1.9) | 1.3(1.5) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range—55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance vs DC Current

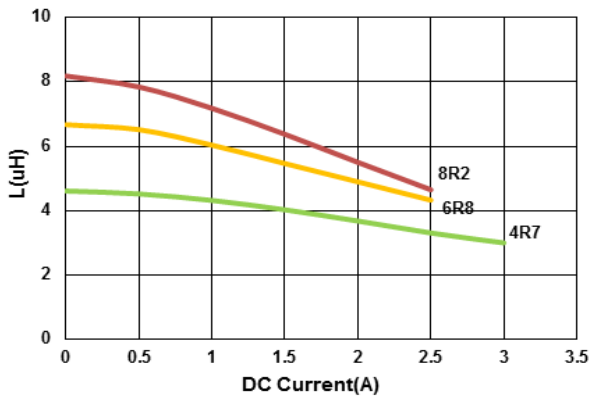

Temperature Change v.s DC Current

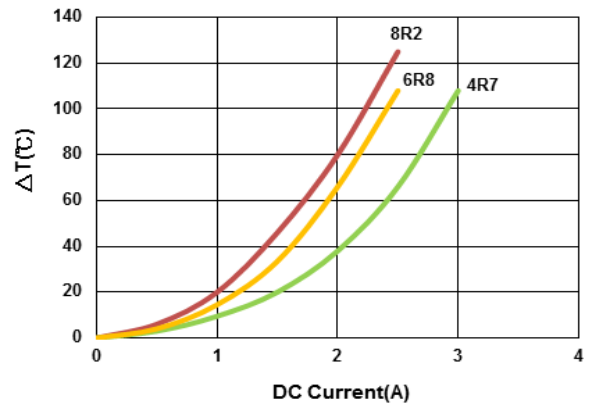

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA000404151R0MA1 | 1.0 | 20 | 100 | 42 | 7 | 4 |
| BMRA000404151R5MA1 | 1.5 | 20 | 100 | 50 | 6 | 3.5 |
| BMRA000404152R2MA1 | 2.2 | 20 | 100 | 79 | 5 | 3 |
| BMRA000404153R3MA1 | 3.3 | 20 | 100 | 132 | 4.5 | 2.3 |
| BMRA000404154R7MA1 | 4.7 | 20 | 100 | 146 | 4 | 2 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
L : WK 3260B or WK 6500P, 100kHz 0.5V
RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

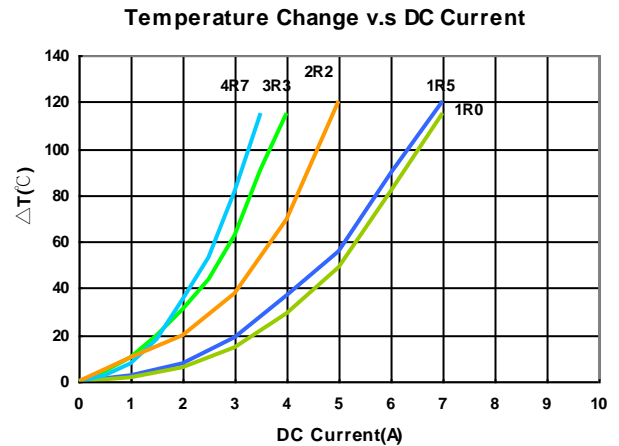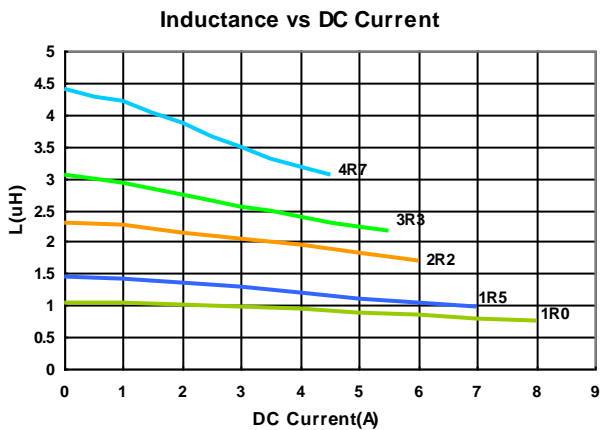

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA00040420R10MA1 | 0.10 | 20 | 100 | 4 | 25 | 12.0 |
| BMRA00040420R22MA1 | 0.22 | 20 | 100 | 6.6 | 12.5 | 9.0 |
| BMRA00040420R47MA1 | 0.47 | 20 | 100 | 14 | 9.5 | 7.0 |
| BMRA00040420R56MA1 | 0.56 | 20 | 100 | 16 | 10.0 | 6.5 |
| BMRA00040420R68MA1 | 0.68 | 20 | 100 | 21 | 8.0 | 5.2 |
| BMRA000404201R0MA1 | 1.0 | 20 | 100 | 27 | 7.0 | 4.5 |
| BMRA000404201R5MA1 | 1.5 | 20 | 100 | 46 | 6.0 | 4.0 |
| BMRA000404202R2MA1 | 2.2 | 20 | 100 | 58 | 5.0 | 3.0 |
| BMRA000404203R3MA1 | 3.3 | 20 | 100 | 87 | 4.0 | 2.5 |
| BMRA000404204R7MA1 | 4.7 | 20 | 100 | 126 | 3.0 | 2.2 |
| BMRA000404206R8MA1 | 6.8 | 20 | 100 | 135 | 2.5 | 2.0 |
| BMRA000404208R2MA1 | 8.2 | 20 | 100 | 216 | 2.5 | 2.0 |
| BMRA00040420100MA1 | 10 | 20 | 100 | 258 | 2.0 | 1.6 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
L : WK 3260B or WK 6500P, 100KHz 0.5V
RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

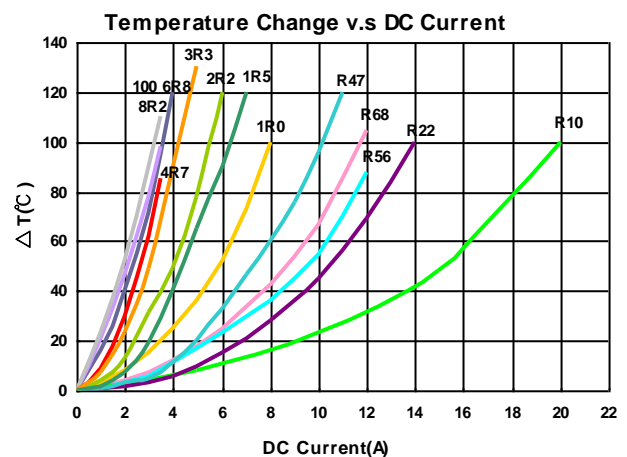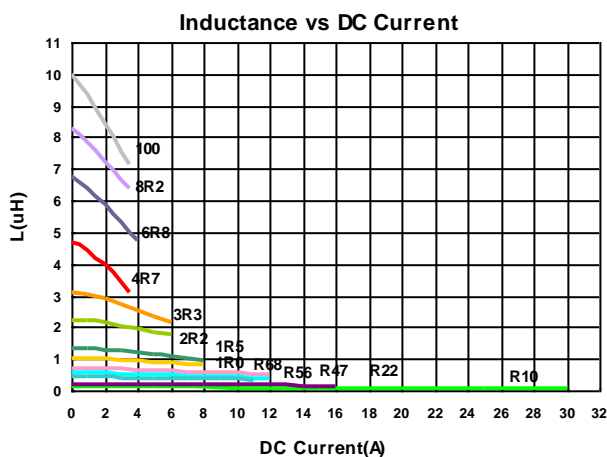

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BMRA000505124R7MB1 | 4.7 | 20 | 100 | 163(144) | 2.9(3.5) | 2(2.3) |
| BMRA000505126R8MB1 | 6.8 | 20 | 100 | 245(220) | 2.2(2.4) | 1.85(2) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance vs DC Current

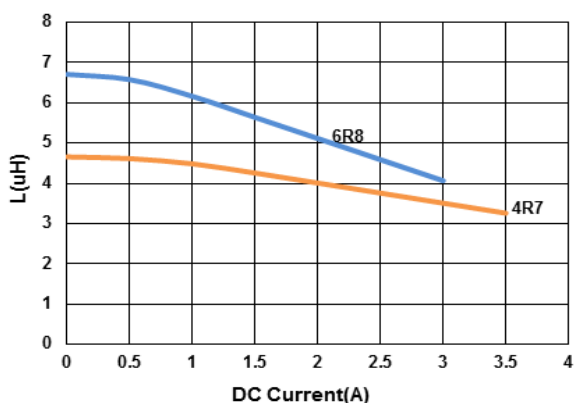

Temperature Change v.s DC Current

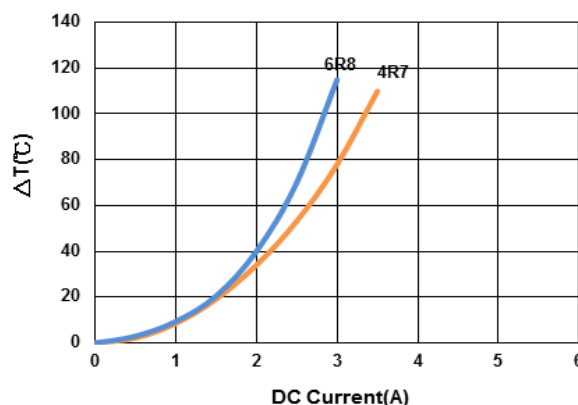

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRB000505121R0MA1 | 1.0 | 20 | 100 | 30 | 6.0 | 5.0 |
| BMRB000505122R2MA1 | 2.2 | 20 | 100 | 76 | 4.0 | 3.5 |
| BMRB000505126R8MA1 | 6.8 | 20 | 100 | 250 | 2.3 | 2.0 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range—55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

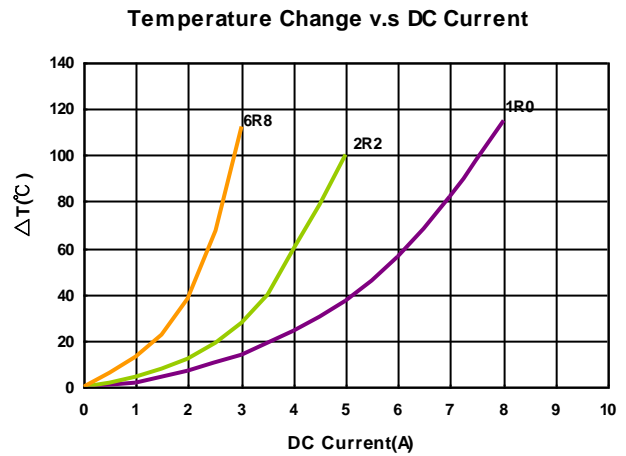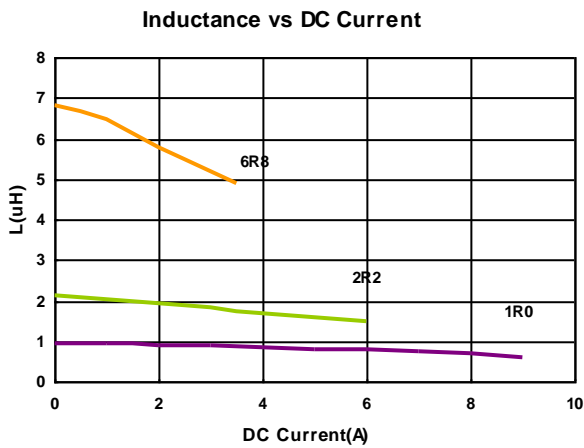

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BMRB000505124R7MB1 | 4.7 | 20 | 100 | 135(110) | 3.2(3.7) | 2.7(3) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance vs DC Current

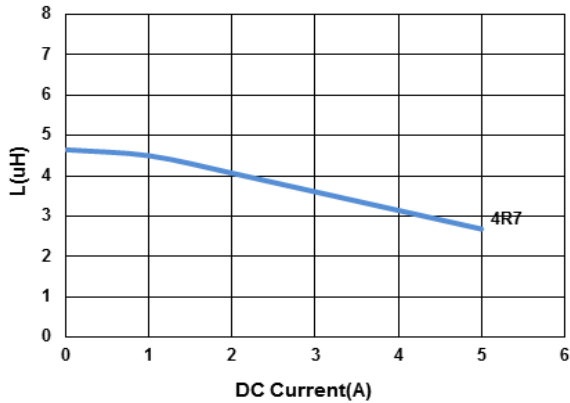

Temperature Change v.s DC Current

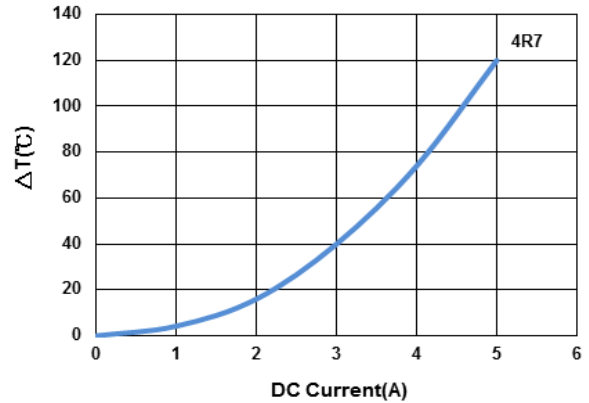

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (μH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA00050515R47MA1 | 0.47 | 20 | 100 | 16 | 12 | 8.0 |
| BMRA00050515R68MA1 | 0.68 | 20 | 100 | 23 | 10 | 6.0 |
| BMRA000505151R0MA1 | 1.0 | 20 | 100 | 33 | 8.0 | 5.0 |
| BMRA000505151R5MA1 | 1.5 | 20 | 100 | 50 | 6.0 | 4.0 |
| BMRA000505152R2MA1 | 2.2 | 20 | 100 | 68 | 6.0 | 3.3 |
| BMRA000505153R3MA1 | 3.3 | 20 | 100 | 84 | 5.0 | 3.0 |
| BMRA000505154R7MA1 | 4.7 | 20 | 100 | 135 | 4.0 | 2.5 |
| BMRA000505155R6MA1 | 5.6 | 20 | 100 | 175 | 3.5 | 2.2 |
| BMRA000505156R8MA1 | 6.8 | 20 | 100 | 192 | 3.0 | 2.0 |
| BMRA00050515100MA1 | 10 | 20 | 100 | 195 | 2.0 | 1.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
L : WK 3260B or WK 6500P, 100kHz 0.5V
RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

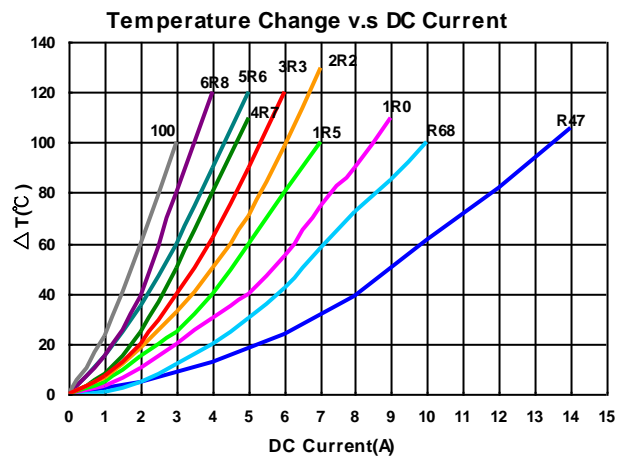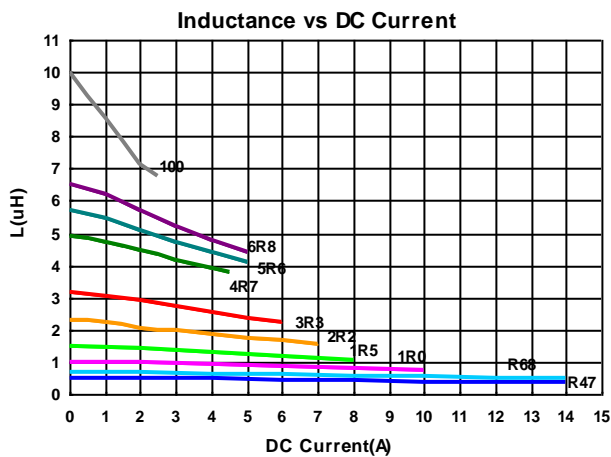

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRB000505151R0MA1 | 1.0 | 20 | 100 | 23 | 9 | 6.5 |
| BMRB000505152R2MA1 | 2.2 | 20 | 100 | 64 | 6 | 3.3 |
| BMRB000505154R7MA1 | 4.7 | 20 | 100 | 106 | 4 | 3.0 |
| BMRB00050515100MA1 | 10 | 20 | 100 | 170 | 3 | 2.0 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

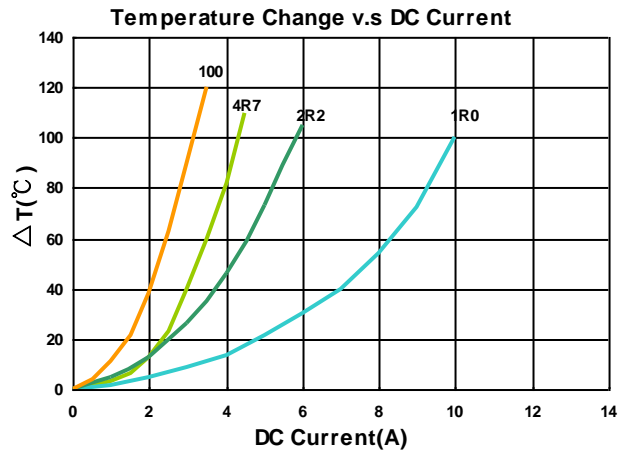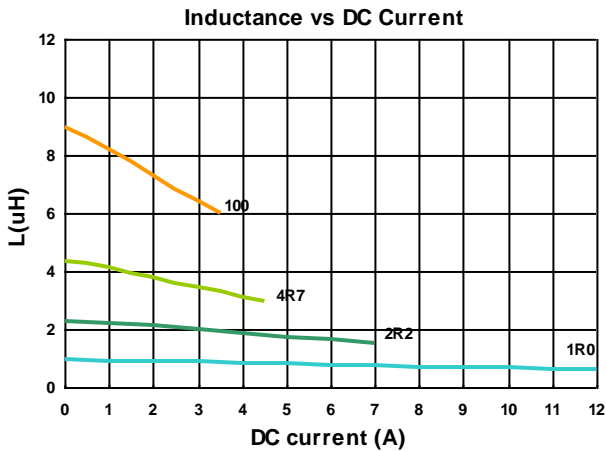

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ) | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|------------------|--------------|--------------|
| BMRB00050518R47MB1 | 0.47 | 20 | 100 | 8.5(7.6) | 15.5 | 10.5 |
| BMRB00050518R68MB1 | 0.68 | 20 | 100 | 13.8(12) | 13 | 9 |
| BMRB000505181R0MB1 | 1.0 | 20 | 100 | 18(15) | 10 | 8 |
| BMRB000505181R5MB1 | 1.5 | 20 | 100 | 28(23) | 9 | 6.2 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

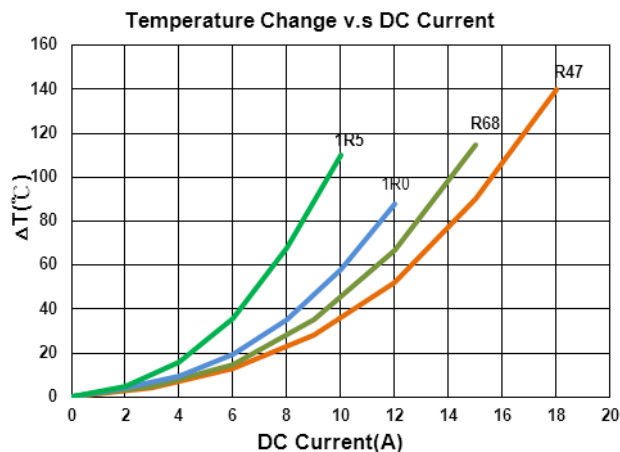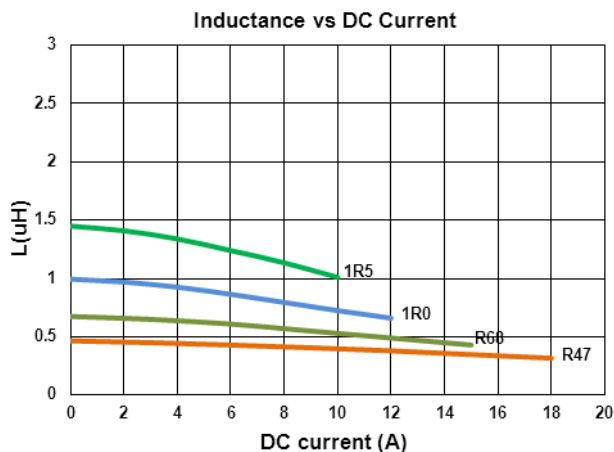

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRB00050518R47MA1 | 0.47 | 20 | 100 | 9.0 | 15.5 | 10.5 |
| BMRB000505181R0MA1 | 1.0 | 20 | 100 | 17 | 9.0 | 8.0 |
| BMRB000505182R2MA1 | 2.2 | 20 | 100 | 35 | 6.5 | 5.0 |
| BMRB000505183R3MA1 | 3.3 | 20 | 100 | 58 | 5.0 | 4.5 |
| BMRB000505184R7MA1 | 4.7 | 20 | 100 | 85 | 4.0 | 3.5 |
| BMRB000505186R8MA1 | 6.8 | 20 | 100 | 120 | 3.4 | 2.8 |
| BMRB00050518100MA1 | 10 | 20 | 100 | 155 | 3.0 | 2.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 - L : WK 3260B or WK 6500P, 100kHz 0.5V
 - RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

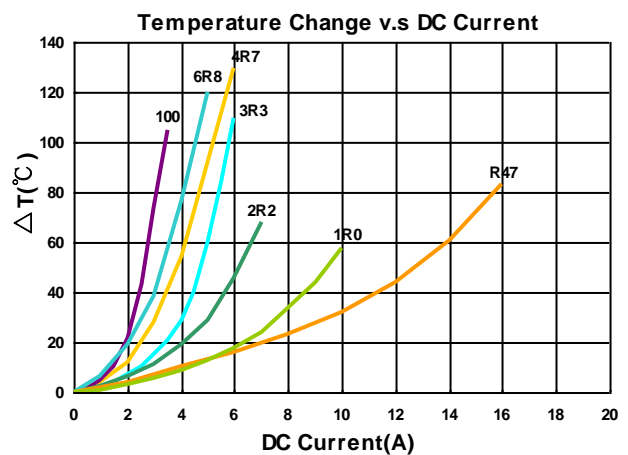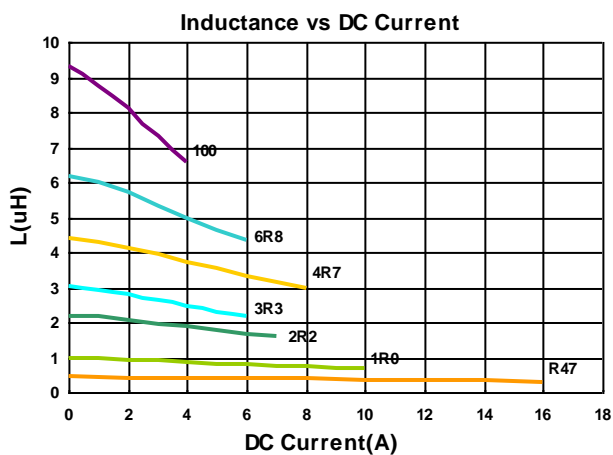

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA00050520R47MA1 | 0.47 | 20 | 100 | 9 | 15.5 | 10.5 |
| BMRA000505201R0MA1 | 1.0 | 20 | 100 | 30 | 7.0 | 6.0 |
| BMRA000505201R5MA1 | 1.5 | 20 | 100 | 35 | 6.5 | 5.5 |
| BMRA000505202R2MA1 | 2.2 | 20 | 100 | 45 | 6.0 | 4.0 |
| BMRA000505203R3MA1 | 3.3 | 20 | 100 | 60 | 5.5 | 3.5 |
| BMRA000505204R7MA1 | 4.7 | 20 | 100 | 90 | 5.0 | 3.0 |
| BMRA000505205R6MA1 | 5.6 | 20 | 100 | 120 | 4.5 | 2.8 |
| BMRA000505206R8MA1 | 6.8 | 20 | 100 | 125 | 4.5 | 2.8 |
| BMRA00050520100MA1 | 10 | 20 | 100 | 180 | 4.0 | 2.3 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 - L : WK 3260B or WK 6500P, 100kHz 0.5V
 - RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance v.s DC Current

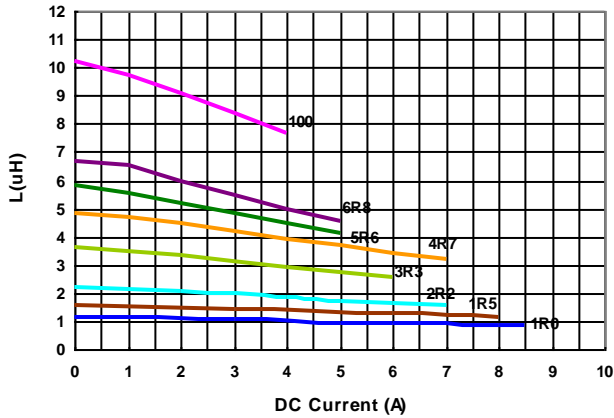

Temperature Change v.s DC Current

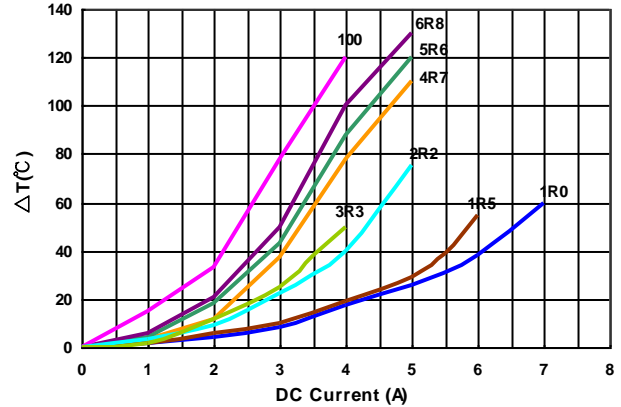

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRA00050530R20MA1 | 0.20 | 20 | 100 | 3.9 | 14.5 | 17.0 |
| BMRA00050530R47MA1 | 0.47 | 20 | 100 | 8 | 14 | 10.0 |
| BMRA00050530R68MA1 | 0.68 | 20 | 100 | 12 | 14 | 8.0 |
| BMRA000505301R0MA1 | 1.0 | 20 | 100 | 15 | 11 | 7.0 |
| BMRA000505301R2MA1 | 1.2 | 20 | 100 | 15 | 11 | 6.5 |
| BMRA000505301R5MA1 | 1.5 | 20 | 100 | 25 | 10 | 6.0 |
| BMRA000505302R2MA1 | 2.2 | 20 | 100 | 35 | 8 | 5.0 |
| BMRA000505303R3MA1 | 3.3 | 20 | 100 | 46 | 7 | 4.5 |
| BMRA000505304R7MA1 | 4.7 | 20 | 100 | 60 | 6 | 4.0 |
| BMRA000505306R8MA1 | 6.8 | 20 | 100 | 110 | 5 | 3.0 |
| BMRA00050530100MA1 | 10 | 20 | 100 | 126 | 4.5 | 2.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

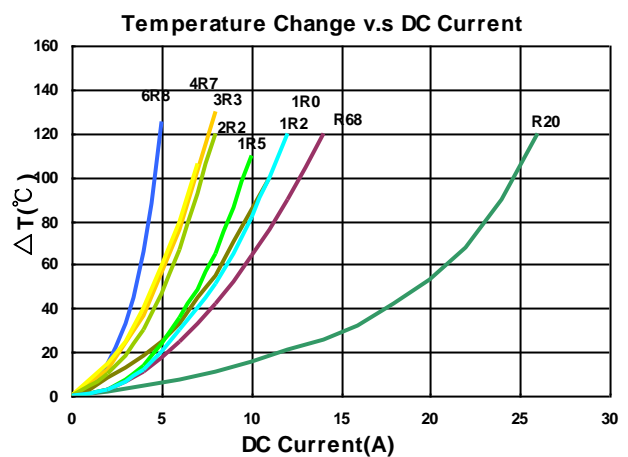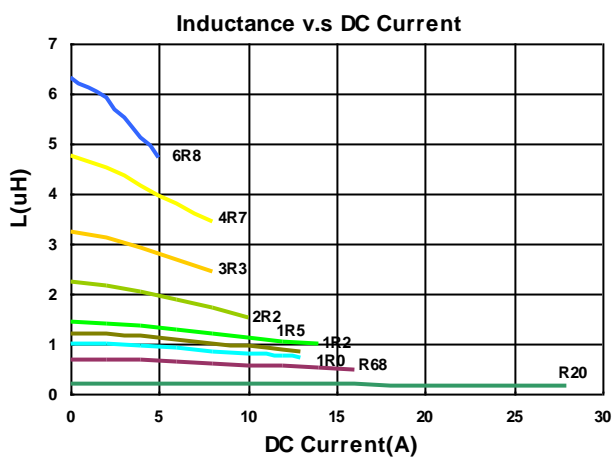

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRB000606124R7MA1 | 4.7 | 20 | 100 | 122 | 3.5 | 2.5 |
| BMRB000606126R8MA1 | 6.8 | 20 | 100 | 210 | 2.8 | 2.2 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance vs DC Current

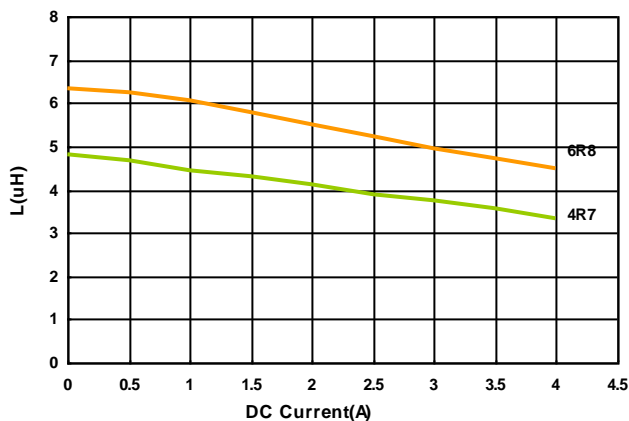

Temperature Change v.s DC Current

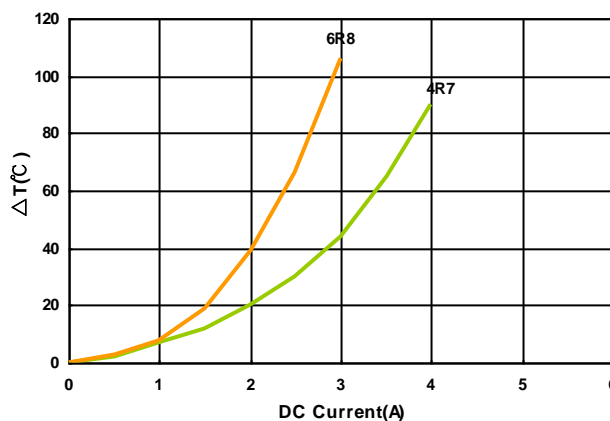

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRA000606152R2MA1 | 2.2 | 20 | 100 | 54 | 6.0 | 3.5 |
| BMRA000606153R3MA1 | 3.3 | 20 | 100 | 63 | 5.5 | 3.3 |
| BMRA000606154R7MA1 | 4.7 | 20 | 100 | 105 | 4.5 | 3.2 |
| BMRA000606156R8MA1 | 6.8 | 20 | 100 | 140 | 4.0 | 2.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
L : WK 3260B or WK 6500P, 100kHz 0.5V
RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

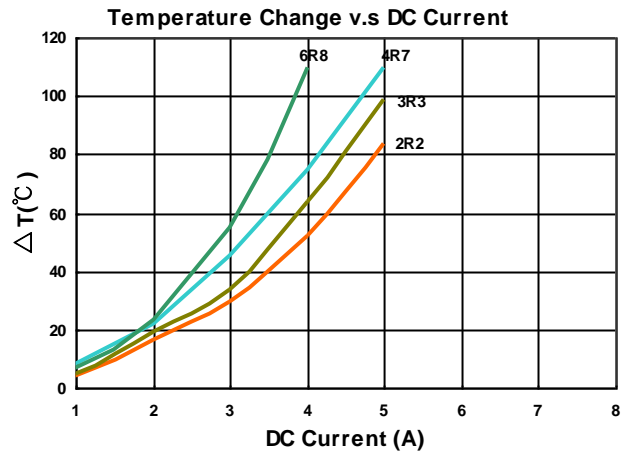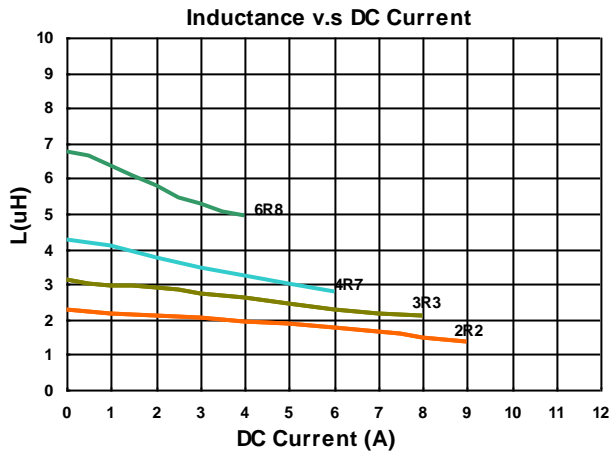

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRB000606151R0MA1 | 1.0 | 20 | 100 | 21 | 9.0 | 5.5 |
| BMRB000606153R3MA1 | 3.3 | 20 | 100 | 63 | 5.5 | 3.3 |
| BMRB00060615100MA1 | 10 | 20 | 100 | 175 | 3.0 | 2.0 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

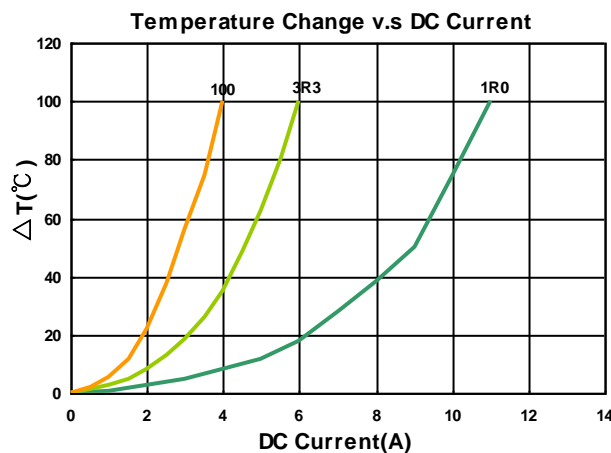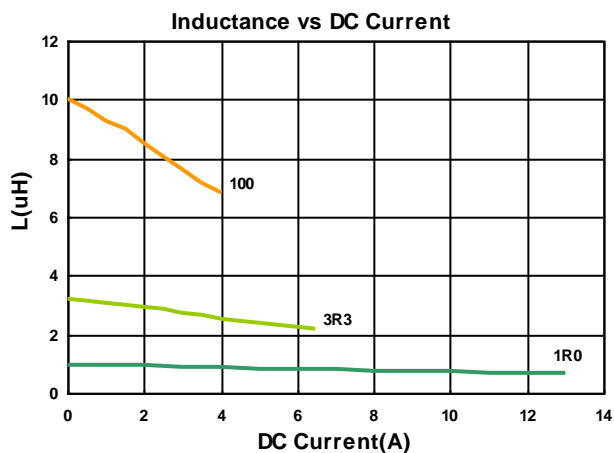

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRB00060618R22MA1 | 0.22 | 20 | 100 | 5.2 | 29 | 14 |
| BMRB00060618R33MA1 | 0.33 | 20 | 100 | 6.8 | 22 | 12 |
| BMRB00060618R47MA1 | 0.47 | 20 | 100 | 8.4 | 18 | 11 |
| BMRB00060618R68MA1 | 0.68 | 20 | 100 | 12.7 | 17 | 9 |
| BMRB000606181R0MA1 | 1.0 | 20 | 100 | 17 | 14 | 7 |
| BMRB000606181R5MA1 | 1.5 | 20 | 100 | 26 | 12 | 6.5 |
| BMRB000606182R2MA1 | 2.2 | 20 | 100 | 35 | 10 | 6.0 |
| BMRB000606184R7MA1 | 4.7 | 20 | 100 | 70 | 5 | 3.5 |
| BMRB000606186R8MA1 | 6.8 | 20 | 100 | 110 | 3.5 | 2.8 |
| BMRB00060618100MA1 | 10 | 20 | 100 | 155 | 2.5 | 2.3 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
L : WK 3260B or WK 6500P, 100kHz 0.5V
RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance vs DC Current

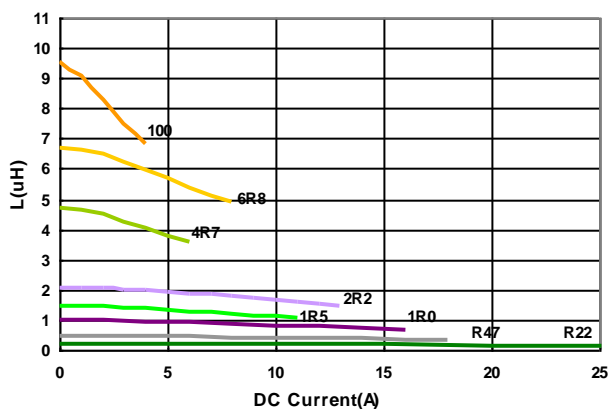

Temperature Change v.s DC Current

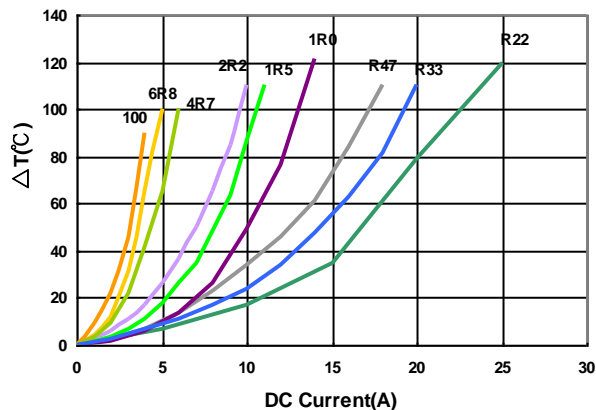

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRB00060624R22MA1 | 0.22 | 20 | 100 | 3.2 | 34 | 21 |
| BMRB00060624R33MA1 | 0.33 | 20 | 100 | 4.1 | 24.5 | 18 |
| BMRB00060624R47MA1 | 0.47 | 20 | 100 | 5.1 | 22 | 15 |
| BMRB000606241R0MA1 | 1.0 | 20 | 100 | 13.5 | 16 | 9 |
| BMRB000606241R5MA1 | 1.5 | 20 | 100 | 20 | 15 | 9 |
| BMRB000606242R2MA1 | 2.2 | 20 | 100 | 28 | 11 | 7 |
| BMRB000606243R3MA1 | 3.3 | 20 | 100 | 39 | 10 | 5.5 |
| BMRB000606244R7MA1 | 4.7 | 20 | 100 | 50 | 10 | 5.0 |
| BMRB000606246R8MA1 | 6.8 | 20 | 100 | 70 | 6.0 | 4.0 |
| BMRB00060624100MA1 | 10 | 20 | 100 | 101 | 4.0 | 3.1 |
| BMRB00060624150MA1 | 15 | 20 | 100 | 160 | 3.3 | 2.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range—55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

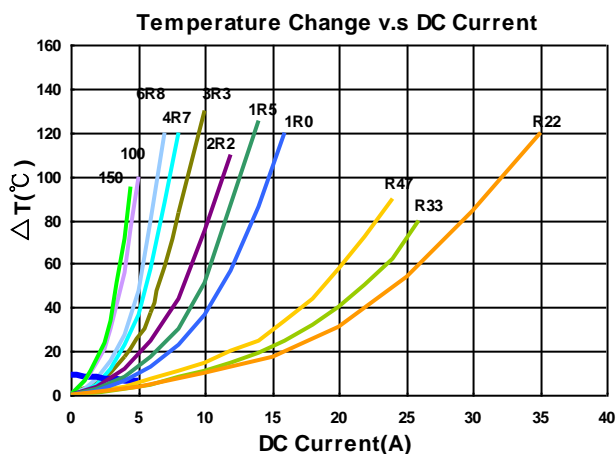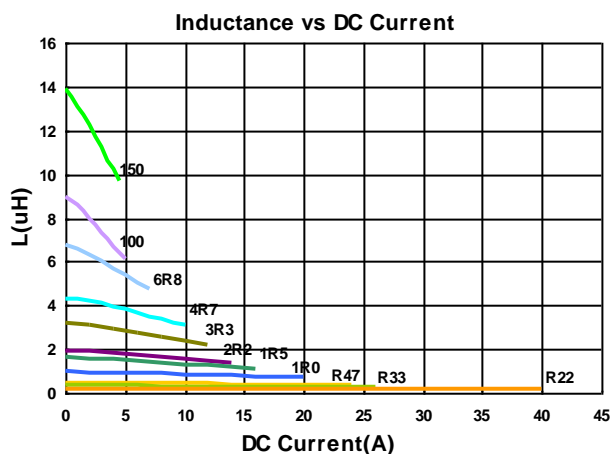

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before

Molding Power Inductors – BMRx Series

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|---------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRA00060630R10MA1 | 0.10 | 20 | 100 | 1.5 | 45 | 37 |
| BMRA00060630R22MA1 | 0.22 | 20 | 100 | 2.8 | 40 | 23 |
| BMRA00060630R33MA1 | 0.33 | 20 | 100 | 4.2 | 33 | 20 |
| BMRA00060630R47MA1 | 0.47 | 20 | 100 | 5.5 | 27 | 16.5 |
| BMRA00060630R56MA1 | 0.56 | 20 | 100 | 5.5 | 27 | 16.5 |
| BMRA00060630R68MA1 | 0.68 | 20 | 100 | 6.3 | 24 | 15 |
| BMRA00060630R82MA1 | 0.82 | 20 | 100 | 8.0 | 23 | 13 |
| BMRA00060630R10MA1 | 1.0 | 20 | 100 | 10 | 22 | 12 |
| BMRA00060630R15MA1 | 1.5 | 20 | 100 | 15 | 18 | 9.5 |
| BMRA00060630R18MA1 | 1.8 | 20 | 100 | 15 | 14 | 9.5 |
| BMRA00060630R22MA1 | 2.2 | 20 | 100 | 20 | 14 | 8.5 |
| BMRA00060630R33MA1 | 3.3 | 20 | 100 | 35 | 12 | 6.0 |
| BMRA00060630R47MA1 | 4.7 | 20 | 100 | 40 | 9 | 5.5 |
| BMRA00060630R6MA1 | 5.6 | 20 | 100 | 40 | 8 | 5.5 |
| BMRA00060630R68MA1 | 6.8 | 20 | 100 | 60 | 8 | 4.5 |
| BMRF00060630R2MA1 | 8.2 | 20 | 100 | 60 | 6 | 4.5 |
| BMRF00060630R100MA1 | 10 | 20 | 100 | 68 | 5.5 | 4.0 |
| BMRA00060630R150MA1 | 15 | 20 | 100 | 122 | 5.0 | 3.0 |
| BMRA00060630R220MA1 | 22 | 20 | 100 | 145 | 3.2 | 3.0 |
| BMRA00060630R330MA1 | 33 | 20 | 100 | 270 | 3.0 | 2.0 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

Inductance v.s DC Current

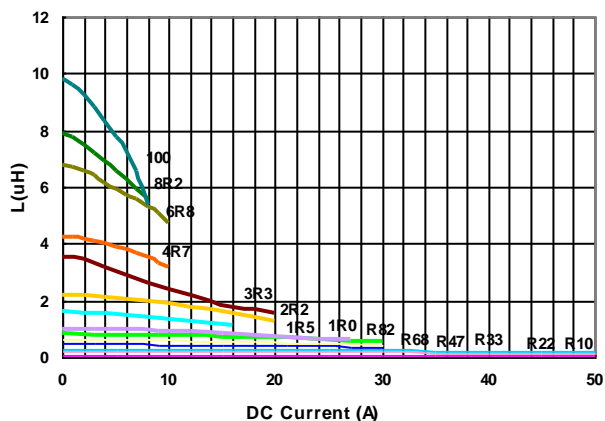

Temperature Change v.s DC Current

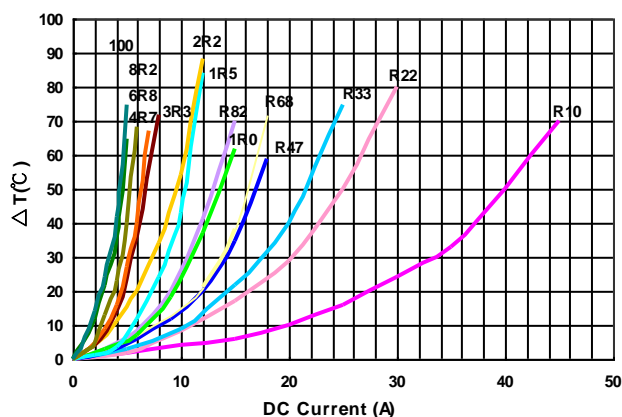

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before



Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ)Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|-------------|--------------|--------------|
| BMRB00060630R10MA1 | 0.10 | 20 | 100 | 1.7 | 60 | 32.5 |
| BMRB00060630R15MA1 | 0.15 | 20 | 100 | 2.5 | 40 | 30 |
| BMRB00060630R22MA1 | 0.22 | 20 | 100 | 3.0 | 34 | 23 |
| BMRB00060630R33MA1 | 0.33 | 20 | 100 | 3.5 | 25 | 21 |
| BMRB00060630R36MA1 | 0.36 | 20 | 100 | 3.9 | 24 | 20 |
| BMRB00060630R47MA1 | 0.47 | 20 | 100 | 4.1 | 20 | 18 |
| BMRB00060630R56MA1 | 0.56 | 20 | 100 | 4.5 | 18 | 16.5 |
| BMRB00060630R68MA1 | 0.68 | 20 | 100 | 5.3 | 17 | 16 |
| BMRB00060630R82MA1 | 0.82 | 20 | 100 | 6.0 | 16 | 14 |
| BMRB000606301R0MA1 | 1.0 | 20 | 100 | 7.4 | 15 | 12 |
| BMRB000606301R2MA1 | 1.2 | 20 | 100 | 10 | 14 | 10 |
| BMRB000606301R5MA1 | 1.5 | 20 | 100 | 12.1 | 14 | 10 |
| BMRB000606302R2MA1 | 2.2 | 20 | 100 | 15 | 10 | 8 |
| BMRB000606303R3MA1 | 3.3 | 20 | 100 | 22 | 9.5 | 6.5 |
| BMRB000606304R7MA1 | 4.7 | 20 | 100 | 33 | 6.5 | 5.5 |
| BMRB000606305R6MA1 | 5.6 | 20 | 100 | 42 | 6 | 5.5 |
| BMRB000606306R8MA1 | 6.8 | 20 | 100 | 50 | 6 | 4.5 |
| BMRB000606308R2MA1 | 8.2 | 20 | 100 | 60 | 6 | 4.5 |
| BMRB00060630100MA1 | 10 | 20 | 100 | 68 | 5.5 | 4 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

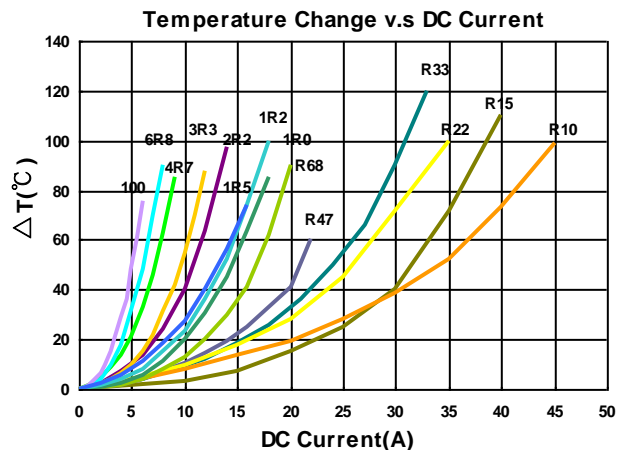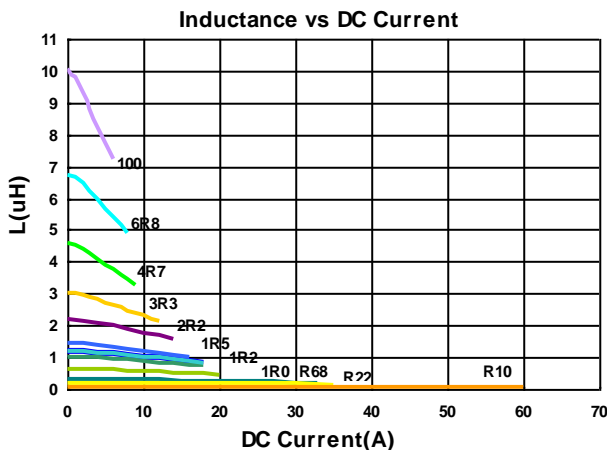

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before



Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRB00060650R56MA1 | 0.56 | 20 | 100 | 3.3 | 20 | 20 |
| BMRB000606501R0MA1 | 1.0 | 20 | 100 | 6.5 | 15 | 13 |
| BMRB000606502R2MA1 | 2.2 | 20 | 100 | 12.5 | 12 | 8 |
| BMRB000606503R3MA1 | 3.3 | 20 | 100 | 20.9 | 9 | 7 |
| BMRB000606504R7MA1 | 4.7 | 20 | 100 | 25.0 | 7 | 6.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

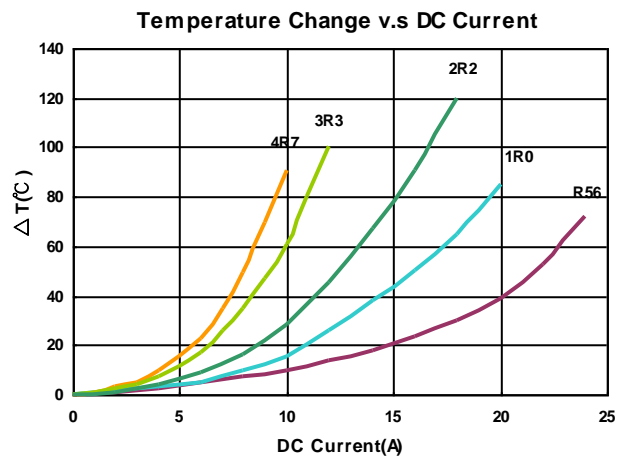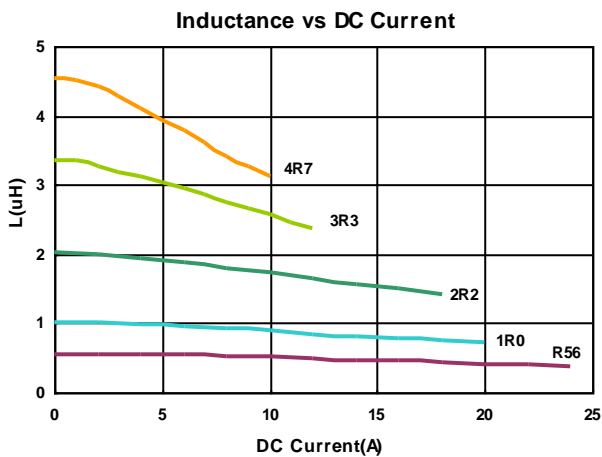

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRG00101030R33MD1 | 0.33 | 20 | 100 | 1.6 | 32 | 23 |
| BMRG001010301R0MD1 | 1.0 | 20 | 100 | 6.0 | 21 | 15 |
| BMRG001010303R3MA1 | 3.3 | 20 | 100 | 16.0 | 14 | 9 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

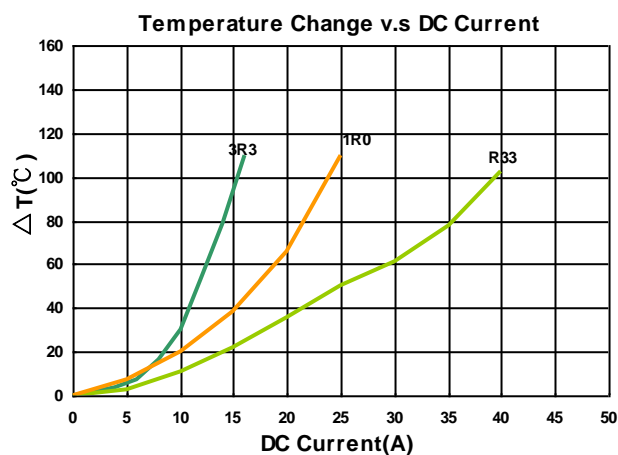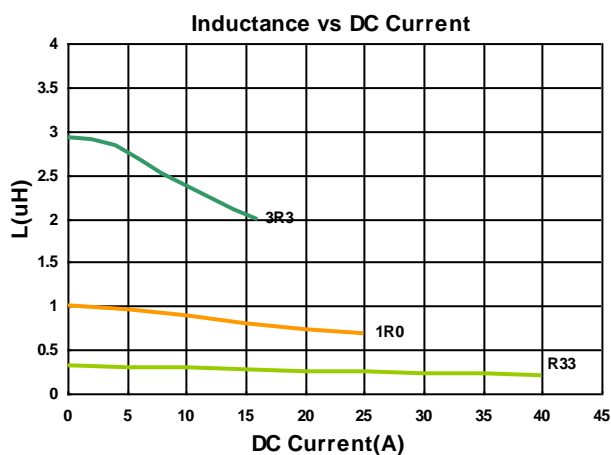

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRF00101040R22MD1 | 0.22 | 20 | 100 | 0.6 | 45 | 35 |
| BMRF00101040R36MD1 | 0.36 | 20 | 100 | 1.2 | 42 | 34 |
| BMRF00101040R45MD1 | 0.45 | 20 | 100 | 1.2 | 38 | 33 |
| BMRF00101040R47MD1 | 0.47 | 20 | 100 | 1.2 | 38 | 33 |
| BMRF00101040R56MD1 | 0.56 | 20 | 100 | 1.55 | 32 | 27 |
| BMRF00101040R68MD1 | 0.68 | 20 | 100 | 1.55 | 30 | 27 |
| BMRF00101040R90MD1 | 0.9 | 20 | 100 | 3.0 | 20 | 22 |
| BMRF001010401R0MD1 | 1.0 | 20 | 100 | 3.1 | 26 | 20 |
| BMRF001010401R5MD1 | 1.5 | 20 | 100 | 4.2 | 22 | 16 |
| BMRF001010401R8MD1 | 1.8 | 20 | 100 | 5 | 16 | 15.3 |
| BMRF001010402R2MD1 | 2.2 | 20 | 100 | 7 | 16 | 14 |
| BMRF001010403R3MA1 | 3.3 | 20 | 100 | 13.2 | 12 | 11 |
| BMRF001010404R7MA1 | 4.7 | 20 | 100 | 16.5 | 12 | 9 |
| BMRF001010406R8MA1 | 6.8 | 20 | 100 | 25 | 10 | 6 |
| BMRF001010408R2MA1 | 8.2 | 20 | 100 | 30 | 9 | 6 |
| BMRF00101040100MA1 | 10 | 20 | 100 | 30 | 7 | 6.5 |
| BMRF00101040150MA1 | 15 | 20 | 100 | 45 | 6 | 6.25 |
| BMRF00101040220MA1 | 22 | 20 | 100 | 64 | 4.5 | 4.5 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 - L : WK 3260B or WK 6500P, 100kHz 0.5V
 - RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

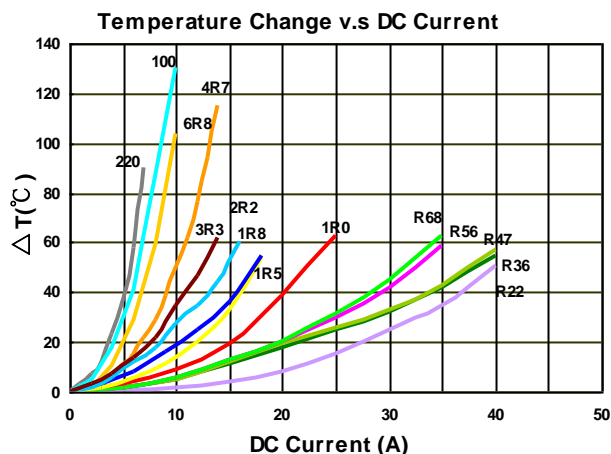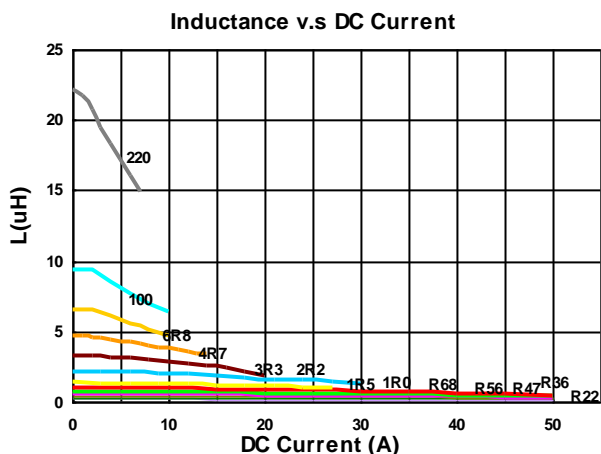

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRF00131350R47MD1 | 0.47 | 20 | 100 | 1.2 | 46 | 37 |
| BMRF001313501R0MD1 | 1.0 | 20 | 100 | 2.5 | 37 | 29 |
| BMRF001313501R5MD1 | 1.5 | 20 | 100 | 3.0 | 28 | 28 |
| BMRF001313504R7MD1 | 4.7 | 20 | 100 | 11.5 | 16 | 11 |
| BMRF001313506R8MA1 | 6.8 | 20 | 100 | 22 | 14 | 9 |
| BMRF00131350100MA1 | 10 | 20 | 100 | 35 | 13 | 7 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

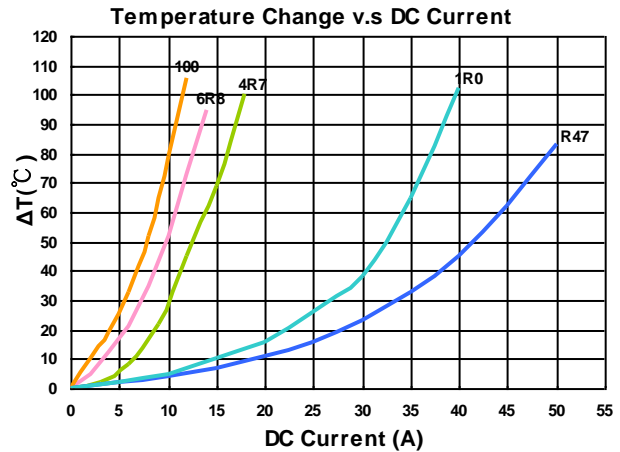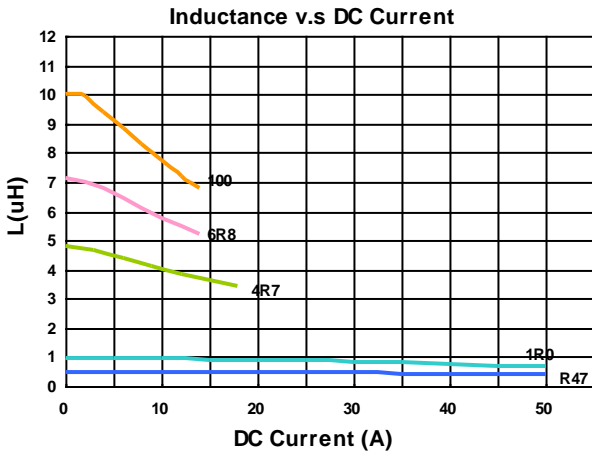

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BMRF001313608R2MA1 | 8.2 | 20 | 100 | 16(13.5) | 13.5(16) | 10(11) |
| BMRF00131360100MA1 | 10 | 20 | 100 | 20.7(17.7) | 11.5(13.5) | 9.5(10) |
| BMRF00131360150MA1 | 15 | 20 | 100 | 27.5(24) | 9(10) | 7(8) |
| BMRF00131360220MA1 | 22 | 20 | 100 | 39(33) | 6.9(7.6) | 6.5(7) |
| BMRF00131360330MA1 | 33 | 20 | 100 | 70(60) | 5.4(6.1) | 4.7(5) |
| BMRF00131360470MA1 | 47 | 20 | 100 | 88(78) | 5.2(5.7) | 4(4.5) |
| BMRF00131360680MA1 | 68 | 20 | 100 | 140(119.5) | 4.7(5.5) | 3(3.5) |
| BMRF00131360101MA1 | 100 | 20 | 100 | 198(178) | 3.5(4) | 2.7(3) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range –55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

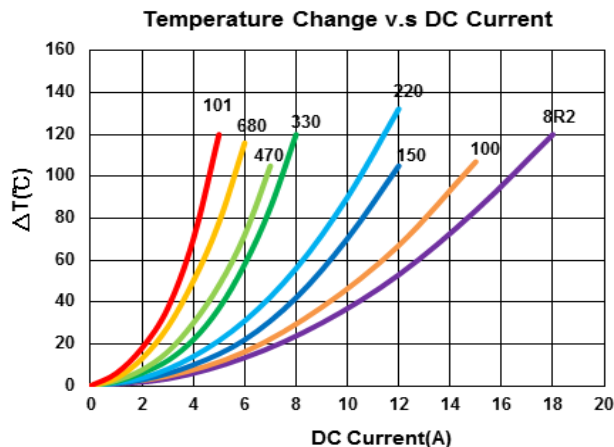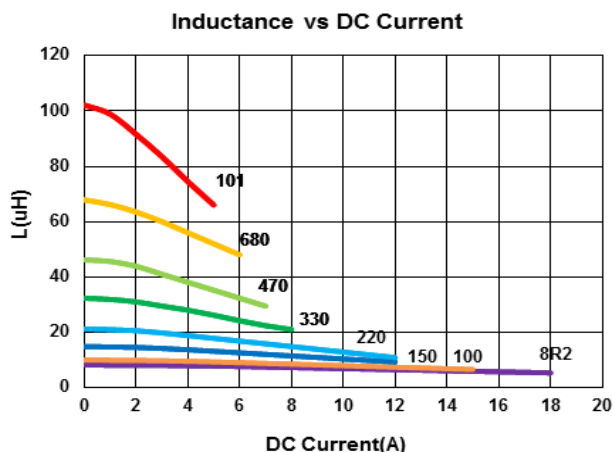

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC (mΩ) Max | Isat (A)Typ. | Irms (A)Typ. |
|--------------------|-----------------|----------------|----------------------|--------------|--------------|--------------|
| BMRG00131360100MA1 | 10 | 20 | 100 | 20.7 | 12.5 | 10 |
| BMRG00131360150MA1 | 15 | 20 | 100 | 29.0 | 9.0 | 6.0 |
| BMRG00131360220MA1 | 22 | 20 | 100 | 39.5 | 7.5 | 5.0 |
| BMRG00131360330MA1 | 33 | 20 | 100 | 75 | 6.0 | 4.0 |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B

Test Instruments : WK3260B Impedance / Material Analyzer

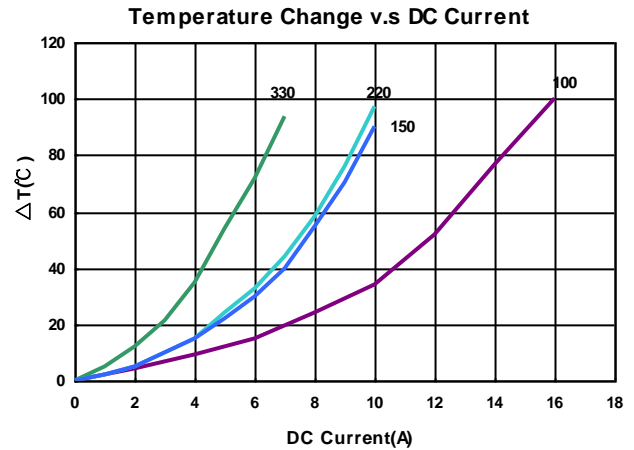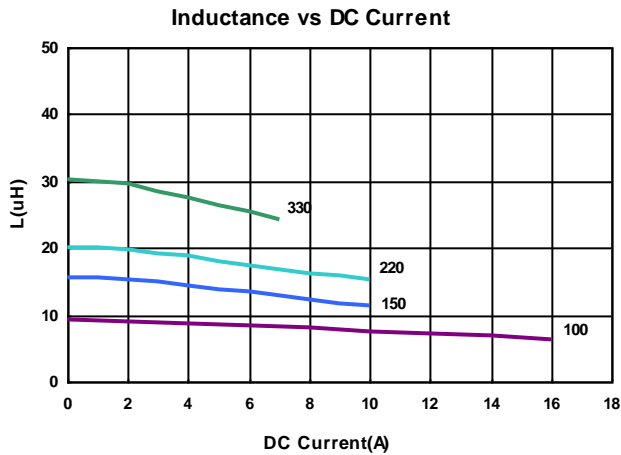

Molding Power Inductors – BMRx Series



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (kHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BMRF001717708R2MB1 | 8.2 | 20 | 100 | 8.6(8) | 20(22) | 15(16) |
| BMRF00171770150MB1 | 15 | 20 | 100 | 15.3(13.8) | 13.5(15.5) | 11(12) |
| BMRF00171770220MB1 | 22 | 20 | 100 | 23(20) | 10.5(12) | 8.7(9.7) |
| BMRF00171770330MB1 | 33 | 20 | 100 | 37(32) | 8.6(10.5) | 8(9.2) |
| BMRF00171770470MB1 | 47 | 20 | 100 | 47(40) | 7.5(8.5) | 6(6.8) |
| BMRF00171770680MB1 | 68 | 20 | 100 | 85(73) | 6.8(8) | 4.7(5.2) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range – 55°C ~ 125°C (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Absolute maximum voltage 30VDC
- Measure Equipment :
 L : WK 3260B or WK 6500P, 100kHz 0.5V
 RDC : CHEN HWA 502 or CHEN HWA 46502B


Test Instruments : WK3260B Impedance / Material Analyzer

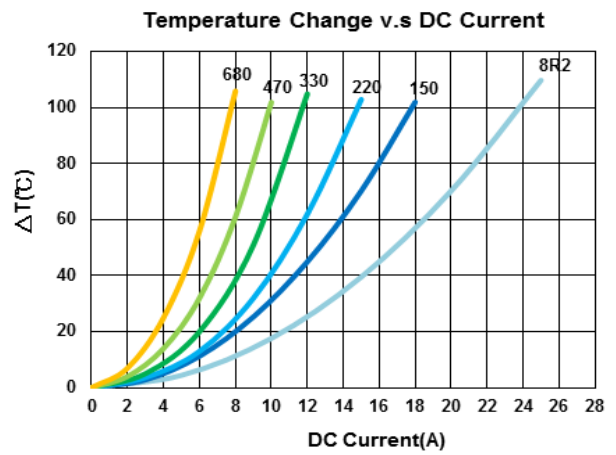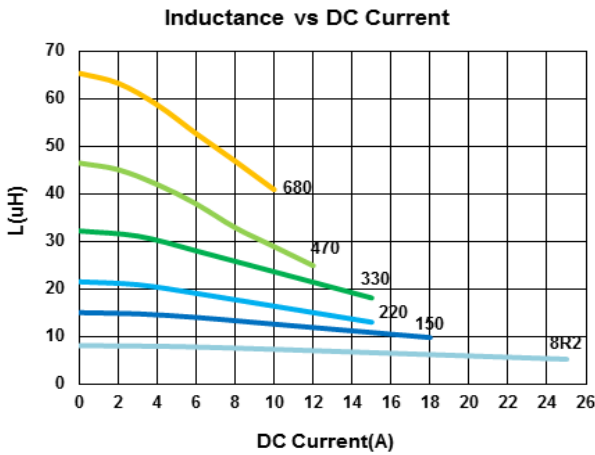


Molding Power Inductors – BMRx Series

Packaging Specifications


Tape Dimensions

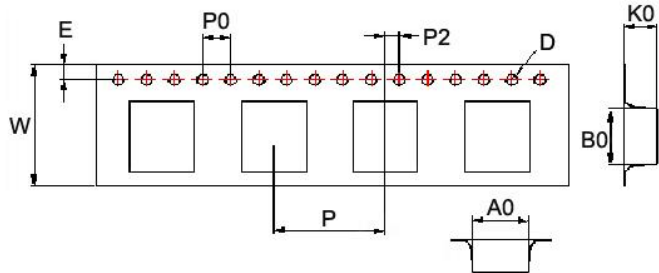

Tape Material

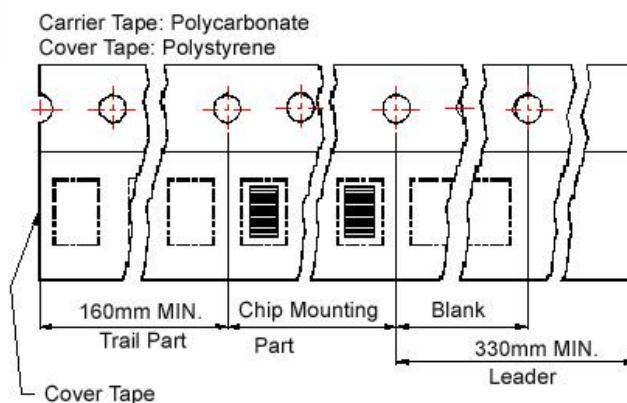

Reel Dimensions

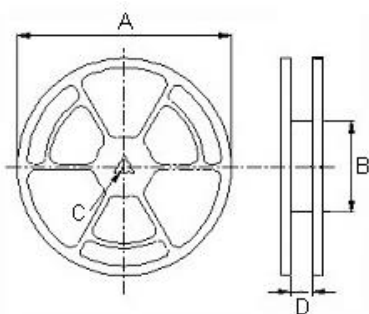

Dimensions in mm

| TYPE | Tape Dimensions | | | | | | | | | Reel Dimensions | | | | Quantity PCS / REEL |
|----------------|-----------------|------|------|------|------|----|----|----|----|-----------------|-----|----|------|------------------------|
| | A0 | B0 | K0 | D | E | W | P | P0 | P2 | A | B | C | D | |
| BMRx00040412 | 4.3 | 4.9 | 1.5 | 1.55 | 1.75 | 12 | 8 | 4 | 2 | 330 | 100 | 13 | 13.4 | 2000 |
| BMRA00040415 | 4.4 | 4.9 | 1.8 | 1.55 | 1.75 | 12 | 8 | 4 | 2 | 330 | 100 | 13 | 13.4 | 2000 |
| BMRA00040420 | 4.3 | 4.9 | 2.4 | 1.55 | 1.75 | 12 | 8 | 4 | 2 | 330 | 100 | 13 | 13.4 | 2000 |
| BMRB00050512 | 5.9 | 6.2 | 1.5 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRx00050512-B | 5.5 | 6.0 | 1.5 | 1.55 | 1.75 | 12 | 8 | 4 | 2 | 330 | 100 | 13 | 13.4 | 1000 |
| BMRx00050515 | 5.7 | 6.1 | 1.9 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRB00050518-B | 5.5 | 6.0 | 2.2 | 1.55 | 1.75 | 12 | 8 | 4 | 2 | 330 | 100 | 13 | 13.4 | 1000 |
| BMRB00050518 | 5.9 | 6.2 | 2.2 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRA00050520 | 5.7 | 5.9 | 2.4 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRA00050530 | 5.9 | 6.2 | 3.4 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRB00060612 | 6.9 | 7.6 | 1.6 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRx00060615 | 6.9 | 7.6 | 2.1 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRB00060618 | 6.9 | 7.6 | 2.1 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRB00060624 | 7.0 | 7.6 | 2.7 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRx00060630 | 6.9 | 7.6 | 3.4 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRB00060650 | 6.9 | 7.6 | 5.4 | 1.55 | 1.75 | 16 | 12 | 4 | 2 | 330 | 100 | 13 | 16.0 | 1000 |
| BMRG00101030 | 10.6 | 11.7 | 3.25 | 1.55 | 1.75 | 24 | 16 | 4 | 2 | 330 | 100 | 13 | 24.4 | 500 |
| BMRF00101040 | 10.6 | 11.7 | 4.25 | 1.55 | 1.75 | 24 | 16 | 4 | 2 | 330 | 100 | 13 | 24.4 | 500 |
| BMRF00131350 | 13 | 14 | 5.25 | 1.55 | 1.75 | 24 | 16 | 4 | 2 | 330 | 100 | 13 | 24.4 | 500 |
| BMRx00131360 | 13 | 14 | 6.25 | 1.55 | 1.75 | 24 | 16 | 4 | 2 | 330 | 100 | 13 | 24.4 | 500 |
| BMRF00171770 | 17.6 | 18.7 | 7.25 | 1.55 | 1.75 | 32 | 24 | 4 | 2 | 330 | 100 | 13 | 32 | 200 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>CHILISIN\(奇力新\)](#)