

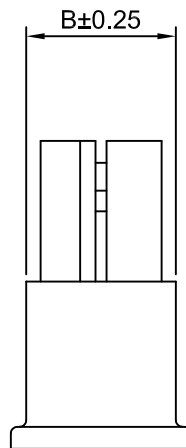


3P~12P

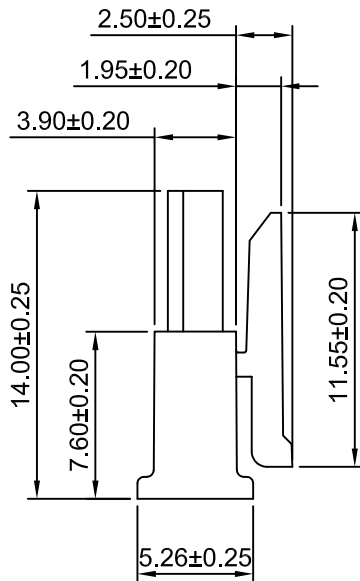

2P



Ordering Information:

C3030HF-XP - ***
1 2

- 1.Part No.
- 2.Material:


(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,

IEC 60335-1,5th Edition

Glow Wire Capable.

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10
A1	CHANGE THE DRAWING	2017.10.24
A2	CHANGE THE CURRENT RATING	2018.12.14
A3	CHANGE THE DRAWING	2019.07.22
A4	ADD THE SIZE	2019.11.16
A5	CHANGE THE SIZE	2020.08.21
A6	CHANGE THE DRAWING	2021.12.20
A7	CHANGE THE DRAWING	2022.01.14



SPECIFICATIONS:

Current Rating: 12.5A AC,DC (AWG #18)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3030HF-2P	3.00	6.85
C3030HF-3P	6.00	9.85
C3030HF-4P	9.00	12.85
C3030HF-5P	12.00	15.85
C3030HF-6P	15.00	18.85
C3030HF-7P	18.00	21.85
C3030HF-8P	21.00	24.85
C3030HF-9P	24.00	27.85
C3030HF-10P	27.00	30.85
C3030HF-11P	30.00	33.85
C3030HF-12P	33.00	36.85

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit mm Scale 3:1 Sheet 1 of 1

DRWN Xu Lei CHK'D Diankui Wan APPR Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°



TITLE
3.00mm PITCH
SINGLE ROW HOUSING

DRAWING NO. C3030HF-XP REV A7

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn](#)