
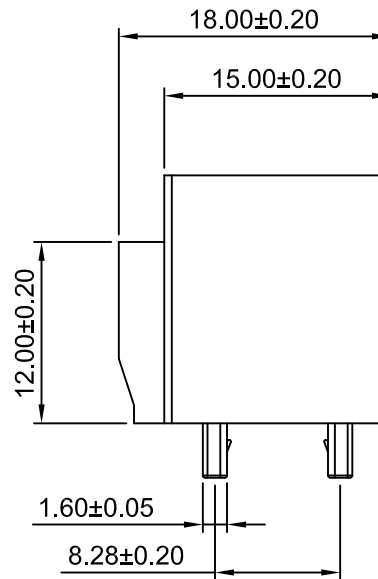
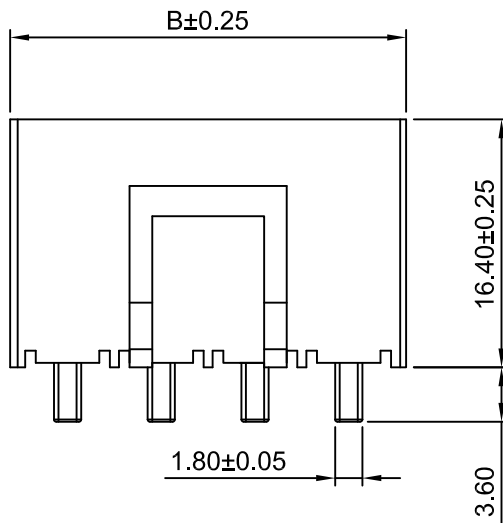


P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

C6201WV-2xXP - *** - *** - *** - *
1 2 3 4 5

- Part NO.
- Housing Material:
(Blank): Nylon 66, UL94V-0(White)
GWT: Nylon 66, UL94V-0(Beige),
IEC 60335-1, 5th Edition
Glow Wire Capable.
- Pin Material:
(Blank): Phosphor Bronze
HCS: Copper Alloy
- Color:
(Blank): see section 2 Material
BK: Black BL: Blue
RD: Red UV: Ultraviolet
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 23A AC, DC (2 Circuits/AWG#12)
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201WV-2x2P	6.20	13.40
C6201WV-2x3P	12.40	19.60
C6201WV-2x4P	18.60	25.80
C6201WV-2x6P	31.00	38.20

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	6.20mm PITCH VERTICAL DUAL ROW HEADER		
DRWN	CHK'D	APPR			
Dengchun Yi	Diankui Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.	REV
A2	MODIFY DRAWING	2021.08.28		C6201WV-2xXP	A2
A1	ADD THE INFORMATION	2020.05.13			
A0	NEW RELEASE	2010.01.23			
REV	DESCRIPTION	DATE			

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn](#)