
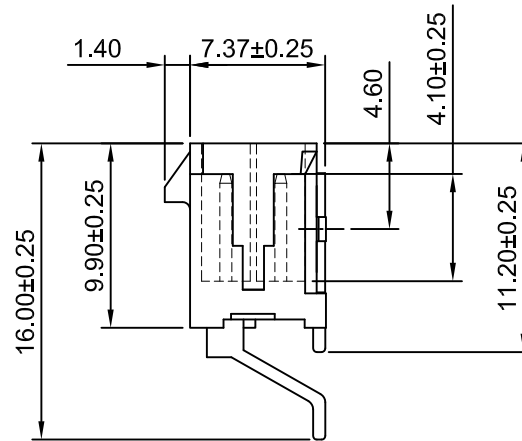


P.C.B LAYOUT

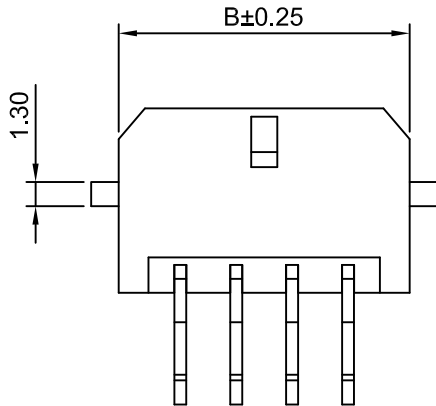

Ordering Information:

C3030WR-S-2xXP - \*\*\* - \*\*\*

1 2 3

1.Part No.

2.Material:

(blank):LCP,UL94V-0

GWT:LCP,UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	6.65	11.20	2x7P	18.00	24.65	29.20
2x2P	3.00	9.65	14.20	2x8P	21.00	27.65	32.20
2x3P	6.00	12.65	17.20	2x9P	24.00	30.65	35.20
2x4P	9.00	15.65	20.20	2x10P	27.00	33.65	38.20
2x5P	12.00	18.65	23.20	2x11P	30.00	36.65	41.20
2x6P	15.00	21.65	26.20	2x12P	33.00	39.65	44.20



CHANGJIANG CONNECTORS CO.,LTD.

REV	DESCRIPTION	DATE	Unit	Scale	Sheet
A6	CHANGE THE DRAWING	2023.04.11	mm	2.5:1	1 of 1
A5	CHANGE THE DRAWING	2022.11.07			
A4	CHANGE THE DRAWING	2022.01.17	DRAWN	CHKD	APPR
A3	CHANGE THE DRAWING	2021.12.22	Chengbiao Ye	DianKui Wan	Jack Yin
A2	CHANGE THE Current Rating	2018.12.19	General Tolerances		THIRD ANGLE PROJECTION
A1	Update drawings	2011.12.14	x.xx±0.25		
A0	NEW RELEASE	2009.05.10	x.xxx±0.20		
			x.xxxx±0.15		
REV	DESCRIPTION	DATE	ANGLES ±1°		

TITLE		DRAWING NO.	REV
3.00mm PITCH RIGHT-ANGLE Dual Row WAFER - SMD TYPE			

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn\(长江连接器\)](#)