

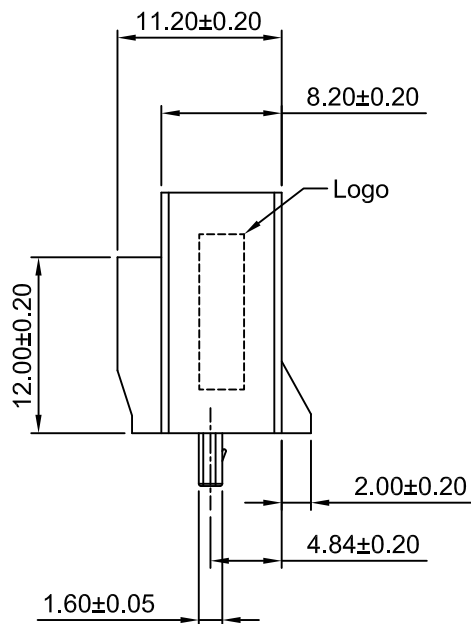
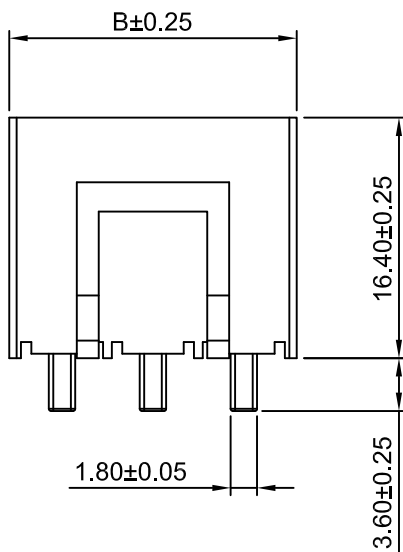


P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

C6201WV-XP - *** - *** - ** - *
1 2 3 4 5

- 1.Part NO.
- 2.Housing Material:
(Blank): Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- 3.Pin Material:
(Blank): Phorphos Bronze
HCS: Copper Alloy
- 4.Color:
(Blank): see section 2 Material
BK: Black BL: Blue
RD: Red UV: Ultraviolet
- 5.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
G3: Gold over Nickel(Au:3u"Mating area)

SPECIFICATIONS:

Current Rating:23A AC,DC(2 Circuits/AWG#12)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201WV-2P	6.20	13.40
C6201WV-3P	12.40	19.60
C6201WV-4P	18.60	25.80

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.x±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE		<p>6.20mm PITCH VERTICAL SINGLE ROW HEADER</p>
DRAWING NO.		
C6201WV-XP		REV A4

REV	DESCRIPTION	DATE
A4	CHANGE THE DRAWING	2022.02.16
A3	CHANGE THE DRAWING	2021.11.10
A2	MODIFY DRAWING	2021.08.28
A1	ADD THE INFORMATION	2020.05.13
A0	NEW RELEASE	2010.01.23

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn\(长江连接器\)](#)