

Ordering Information:

A2501H-XP - **
1 2

1.Part No.

2.Color:


(blank):White

BL:Blue

BK:Black

YL:Yellow

GN:Green

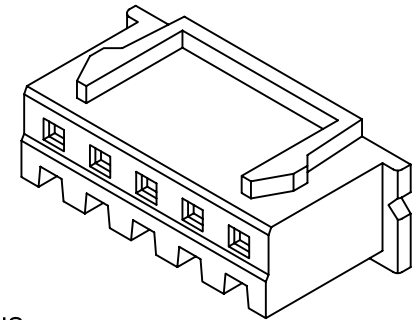

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.70	12P	27.50	30.70
3P	5.00	8.20	13P	30.00	33.20
4P	7.50	10.70	14P	32.50	35.70
5P	10.00	13.20	15P	35.00	38.20
6P	12.50	15.70	16P	37.50	40.70
7P	15.00	18.20	17P	40.00	43.20
8P	17.50	20.70	18P	42.50	45.70
9P	20.00	23.20	19P	45.00	48.20
10P	22.50	25.70	20P	47.50	50.70
11P	25.00	28.20			

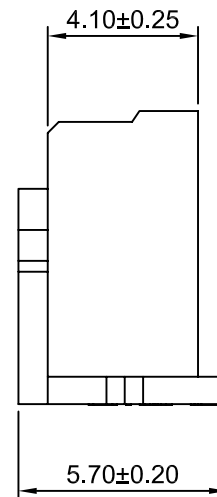

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

Title :
2.50mm PITCH
HOUSING

DRAW NO : **A2501H-XP** REV **A0**

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn](#)