


P.C.B LAYOUT  
TOLERANCE:±0.05

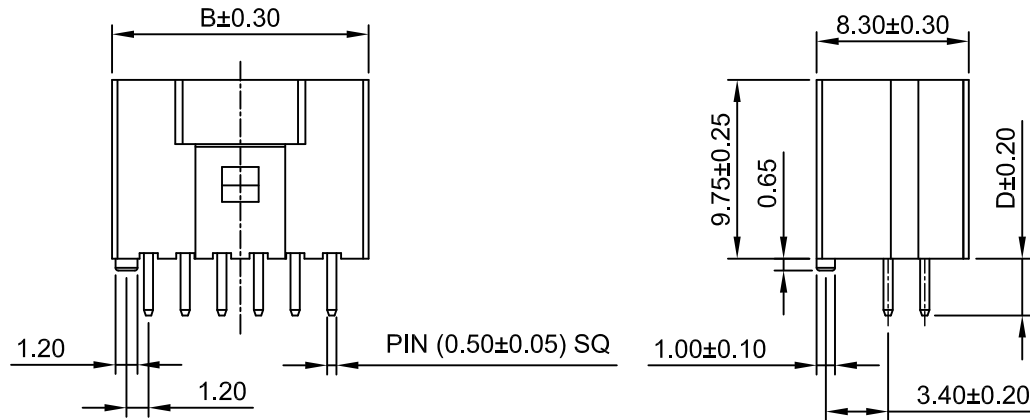

Ordering Information:

A2006WVU-F-2xXP - \*\*\* - \*\*\* - \*\*\* - \*\*\* - \*\*\*  
1 2 3 4 5 6

1.Part NO.

2.Material:

(Blank): Nylon 4T,UL94V-0

66: Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition Glow Wire Capable.

3.Color

(Blank): Natural

BK: Black

CB: Cobalt Blue

DP: Dark Purple

IV: Ivory

DPK: Dark pink

LE: Light blue

TR: Tomato red

BL: Blue

DO: Dark Orange

DH: Dark Gray

OR: Orange

MG: Moss green

LY: Lemon yellow

4.Finish

(Blank): Tin over Nickel

G: Gold over Nickel

5.Size D


(Blank): 3.10mm

D22: 2.20mm

6.Void position:

(Blank): Full positions

N\*.\*.\*: Void position(select Arbitrary numbers)



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2006WVU-F-2x4P	6.00	10.00
A2006WVU-F-2x5P	8.00	12.00
A2006WVU-F-2x6P	10.00	14.00
A2006WVU-F-2x7P	12.00	16.00
A2006WVU-F-2x8P	14.00	18.00
A2006WVU-F-2x9P	16.00	20.00
A2006WVU-F-2x10P	18.00	22.00
A2006WVU-F-2x11P	20.00	24.00
A2006WVU-F-2x12P	22.00	26.00
A2006WVU-F-2x13P	24.00	28.00
A2006WVU-F-2x14P	26.00	30.00
A2006WVU-F-2x15P	28.00	32.00
A2006WVU-F-2x16P	30.00	34.00
A2006WVU-F-2x17P	32.00	36.00
A2006WVU-F-2x18P	34.00	38.00
A2006WVU-F-2x19P	36.00	40.00
A2006WVU-F-2x20P	38.00	42.00




CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 2
DRWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25		
x.xxx±0.20		
x.xxxx±0.15		
ANGLES ±1°		


TITLE	
2.00mm PITCH VERTICAL DUAL ROW WAFER	
DRAWING NO.	REV
A2006WVU-F-2xXP	A4

A4	CHANGE THE DRAWING	2022.01.15
A3	CHANGE THE INFORMATION	2021.12.23
A2	CHANGE THE INFORMATION	2021.02.01
A1	CHANGE THE DRAWING	2017.08.11
A0	NEW RELEASE	2016.07.20
REV	DESCRIPTION	DATE


Style	Circuits	X=Void position																					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22
N3.4.5.6	2x4P			X	X	X	X																
N17.18.19.20	2x11P																	X	X	X	X		




2x4P~2x5P




2x6P~2x9P

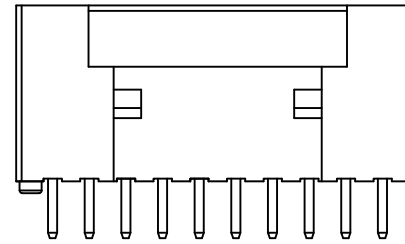

2x10P~2x20P

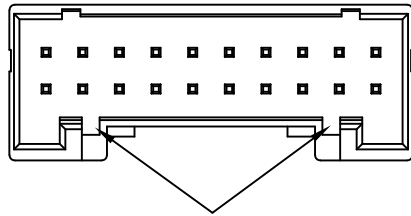

2x4P~2x7P Without Guideway  
2x8P~2x20P With Guideway

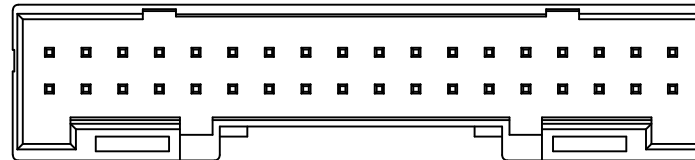

2x17P~2x20P

<b>CJTconn</b> CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	2 of 2	
DRWN	CHK'D	APPR	2.00mm PITCH VERTICAL DUAL ROW WAFER
Wenmin Luo	Diankui Wan	Jack Yin	
A2	CHANGE THE INFORMATION	2021.02.01	DRAWING NO.
A1	CHANGE THE DRAWING	2017.08.11	
A0	NEW RELEASE	2016.07.20	A2006WVU-F-2xXP
REV	DESCRIPTION	DATE	
General Tolerances		THIRD ANGLE PROJECTION	REV A4
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15		ANGLES ±1°	

单击下面可查看定价，库存，交付和生命周期等信息

[>>CJTconn](#)