


CMI-CSSP12080NF-SERIES

Features


- ▶ Magnetic shield type wound inductor for power circuits.
- ▶ Available tape and reel for auto insertion
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified

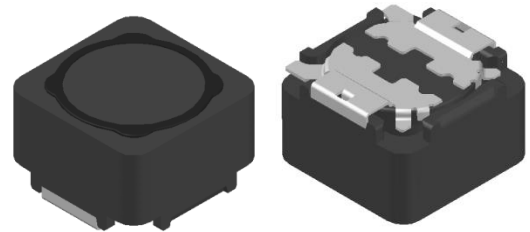

Applications


- ▶ Equipment using for automobiles
(ECM, Airbags, Headlights, Electronic Powder Steering, Motors, ABS, other)

Dimension (Unit:mm)

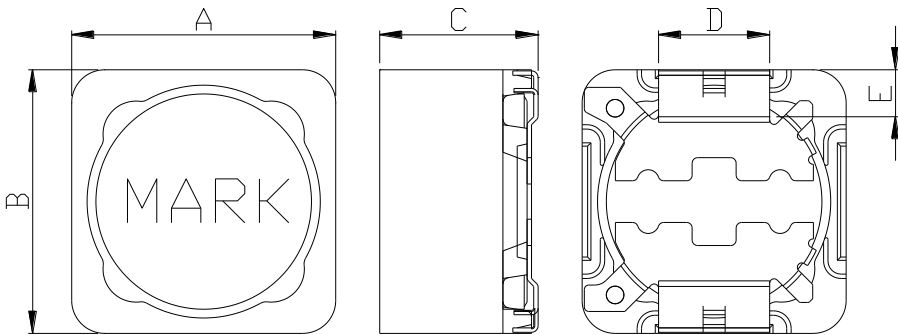


A	B	H	D	E
12.0±0.3	12.0±0.3	8.0 Max	5.0±0.2	1.9±0.2

Land Pattern (Unit:mm)

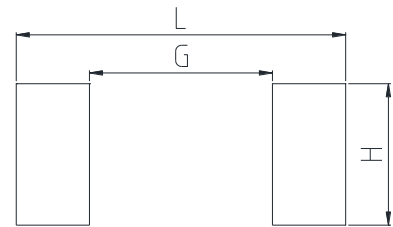

L	G	H
12.6	7.0	5.4

Regulation of part number



- ① CoilMaster's initial
- ② Series Name : Car Shielded core Square shape Pin type Power Inductor
- ③ Core Size (unit:mm)
- ④ Type
- ⑤ Typical inductance value (4.7uH)
- ⑥ Inductance tolerance (±20%)

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2020.03.06

Specifications

Part Number	Inductance (µH)	Tolerance (±)	DCR (mohm) Max.(Typ.)	IDC1(A) Max.(Typ.)	IDC2(A) Max.(Typ.)	Test Frequency (Hz)
CMI-CSSP12080NF-1R0M	1.0	20%	10.1(7)	18.00(20.00)	16.00(17.00)	100k
CMI-CSSP12080NF-2R2M	2.2	20%	11.7(9)	11.50(12.00)	12.00(12.50)	100k
CMI-CSSP12080NF-4R7M	4.7	20%	16.8(14)	9.10(9.50)	9.30(9.70)	100k
CMI-CSSP12080NF-100M	10	20%	24(20)	8.70(9.20)	8.50(8.90)	100k
CMI-CSSP12080NF-150M	15	20%	36(30)	6.70(7.00)	6.60(6.90)	100k
CMI-CSSP12080NF-220M	22	20%	42(35)	5.30(5.60)	5.50(5.90)	100k
CMI-CSSP12080NF-250M	25	20%	50.4(42)	5.20(5.70)	5.30(5.70)	100k
CMI-CSSP12080NF-330M	33	20%	54(45)	4.50(4.80)	4.80(5.30)	100k
CMI-CSSP12080NF-450M	45	20%	69.6(58)	4.30(4.60)	4.60(4.90)	100k
CMI-CSSP12080NF-470M	47	20%	66(55)	3.60(3.90)	4.40(4.70)	100k
CMI-CSSP12080NF-560M	56	20%	84(70)	3.50(3.80)	4.00(4.30)	100k
CMI-CSSP12080NF-680M	68	20%	120(100)	3.20(3.50)	3.50(3.90)	100k
CMI-CSSP12080NF-820M	82	20%	130(110)	3.00(3.30)	3.30(3.70)	100k
CMI-CSSP12080NF-101M	100	20%	150(125)	2.80(3.00)	3.00(3.40)	100k
CMI-CSSP12080NF-121M	120	20%	168(140)	2.60(2.80)	2.90(3.20)	100k
CMI-CSSP12080NF-151M	150	20%	276(230)	2.30(2.40)	2.40(2.60)	100k
CMI-CSSP12080NF-221M	220	20%	336(280)	1.90(2.10)	2.40(2.30)	100k
CMI-CSSP12080NF-271M	270	20%	474(395)	1.75(1.85)	2.00(2.20)	100k
CMI-CSSP12080NF-331M	330	20%	384(420)	1.40(1.60)	1.80(2.00)	100k
CMI-CSSP12080NF-471M	470	20%	624(520)	1.35(1.45)	1.60(1.80)	100k
CMI-CSSP12080NF-681M	680	20%	870(725)	1.15(1.25)	1.40(1.60)	100k
CMI-CSSP12080NF-821M	820	20%	1068(890)	1.00(1.10)	1.30(1.50)	100k
CMI-CSSP12080NF-102M	1000	20%	1620(1350)	0.90(1.00)	1.20(1.30)	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Note 1 : Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

- **You can also contact us by e-mail : coilmaster@coilmaster.com**
- All specifications are subject to change without notice.
- Update date : 2020.03.06

www.coilmaster.com

DC BIAS vs INDUCTANCE

DC BIAS vs TEMPERATURE


- **You can also contact us by e-mail : coilmaster@coilmaster.com**
- All specifications are subject to change without notice.
- Update date : 2020.03.06

www.coilmaster.com

Packaging


(1) Package quantity : 500 (pcs/reel)

(2) Reel Dimensions (unit:mm)

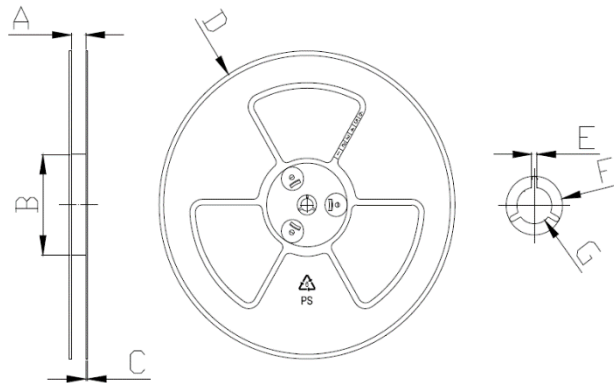

A	B	C	D	E	F	G
24.50	100.0	2.30	330.0	2.30	21.50	13.00
+0.50	+1.00	+0.20	+3.00	+0.30	+0.20	+0.40
-0.50	-1.00	-0.20	-3.00	-0.30	-0.20	-0.40

(3) Tape Dimensions

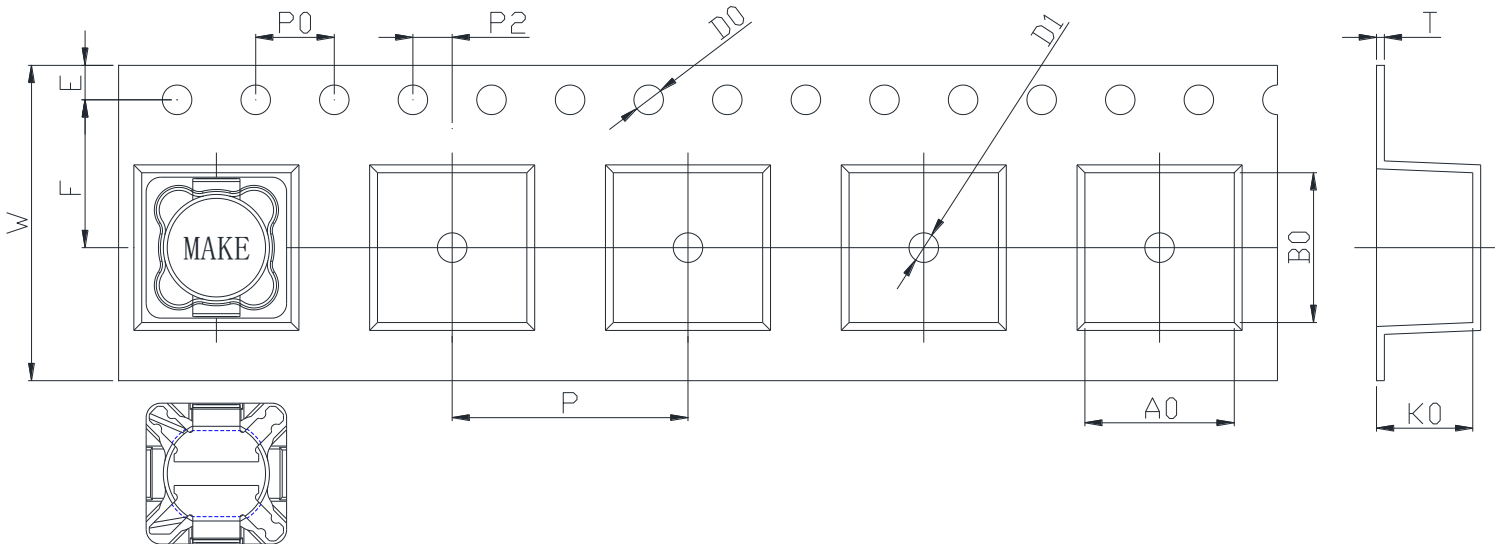

W	A0	B0	K0	E	F	P	P0	P2	D0	T
24.00	12.60	12.45	8.30	1.75	11.50	16.00	4.00	2.00	1.50	0.40
+0.30	+0.10	+0.10	+0.10	+0.10	+0.10	+0.10	+0.10	+0.10	+0.10	+0.05
-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.00	-0.05

Ilisan Sales Office (KOREA) +82)31-904-1444
 Shenzhen Sales Office (CHINA) +86)755-8663-6929
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)866-446-3586

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2020.03.06

www.coilmaster.com

单击下面可查看定价，库存，交付和生命周期等信息

[>>coilmaster\(卡尔马斯特\)](#)