

# CMI-MMPP13070LL-SERIES



## Features


- ▶ High current and low profile.
- ▶ Metal powder molding type for EMC protection.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant

## Applications

- ▶ For DC/DC converter, AV equipment, digital consumer electronics.




Dimension (Unit:mm)

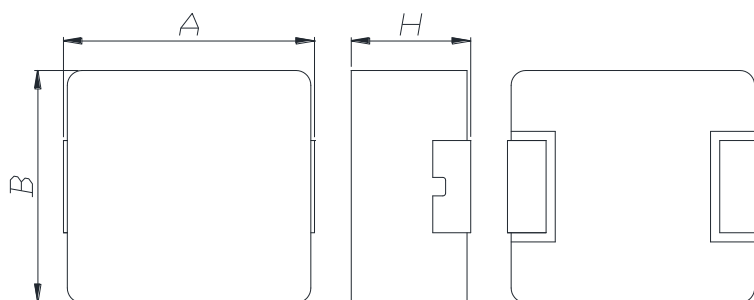

A	B	H
13.65±0.5	12.6±0.4	7.0 Max

Land Pattern (Unit:mm)

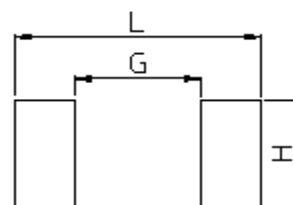

L	G	H
14.2	6.5	5.5

## Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max(Typ)	IDC1(A) Max(Typ)	IDC2(A) Max(Typ)	Test Frequency (Hz)
CMI-MMPP13070LL-4R7M	4.7	7.0(6.2)	22.00(23.00)	20.00(22.00)	1M
CMI-MMPP13070LL-6R8M	6.8	11.5(9.5)	24.00(26.00)	14.00(16.00)	1M
CMI-MMPP13070LL-8R2M	8.2	13.2(11.0)	21.00(23.00)	13.00(15.00)	1M

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +125 °C

Ilisan Sales Office (KOREA) +82)31-904-1444  
 Shenzhen Sales Office (CHINA) +86)755-8663-6929  
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551  
 LA Sales Office (USA) +1)866-446-3586

• You can also contact us by e-mail : [coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

- All specifications are subject to change without notice.
- Update date : 2017.08.24

[www.coilmaster.com](http://www.coilmaster.com)

单击下面可查看定价，库存，交付和生命周期等信息

[>>coilmaster\(卡尔马斯特\)](#)