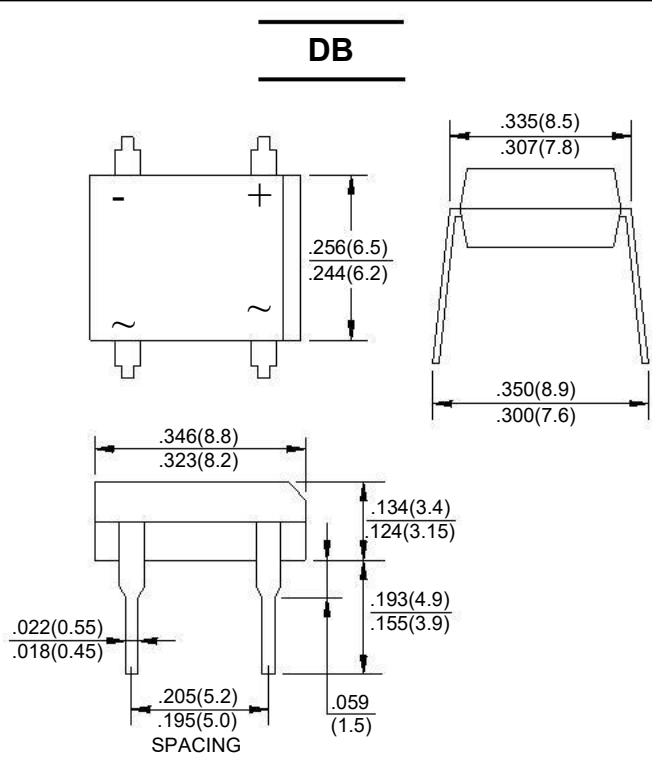


# DB101 thru DB107

<p><b>GLASS PASSIVATED BRIDGE RECTIFIERS</b></p> <p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>● Rating to 1000V PRV</li> <li>● Ideal for printed circuit board</li> <li>● Low forward voltage drop, high current capability</li> <li>● Reliable low cost construction utilizing molded plastic technique results in inexpensive product</li> <li>● Lead tin Pb/Sn copper</li> <li>● The plastic material has UL flammability classification 94V-0</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>● Polarity: As marked on Body</li> <li>● Weight: 0.02 ounces, 0.38 grams</li> <li>● Mounting position: Any</li> </ul>	<p><b>REVERSE VOLTAGE - 50 to 1000 Volts</b> <b>FORWARD CURRENT - 1.0 Amperes</b></p> <p style="text-align: center;"><b>DB</b></p>  <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
--	--

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	DB101	DB102	DB103	DB104	DB105	DB106	DB107	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T <sub>A</sub> =40°C	I <sub>(AV)</sub>	1.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	50							A
Maximum Forward Voltage at 1.0A DC	V <sub>F</sub>	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T <sub>J</sub> =25°C @T <sub>J</sub> =125°C	I <sub>R</sub>	10 500							uA
I <sub>2t</sub> Rating for Fusing (t<8.3ms)	I <sub>2t</sub>	10.4							A <sub>2s</sub>
Typical Junction Capacitance Per Element (Note1)	C <sub>J</sub>	25							pF
Typical Thermal Resistance (Note2)	R <sub>θJC</sub>	40							°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150							°C

Note: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC  
 2. Thermal resistance from junction to ambient mounted on P.C.B with 0.5\*0.5"(13\*13mm) copper pads.

FIG.1-FORWARD CURRENT DERATING CURVE

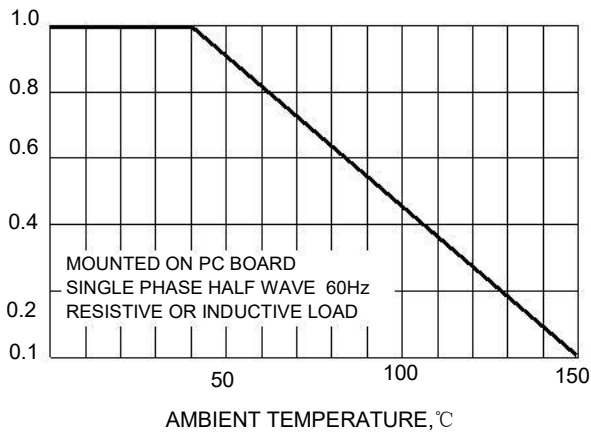


FIG.2-MXIMUM NON-REPETITIVE SURGE CURRENT

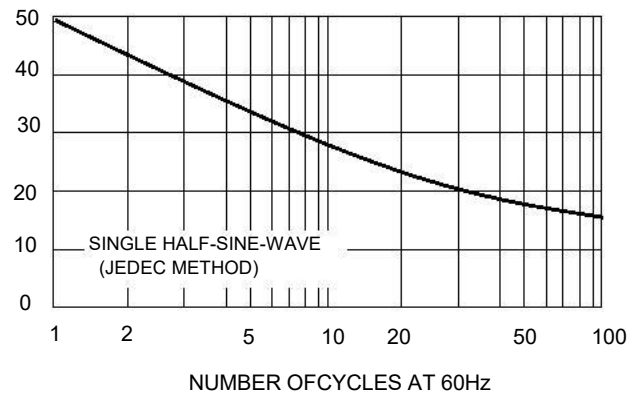


FIG.3-TYPICAL JUNCTION CAPACITANCE

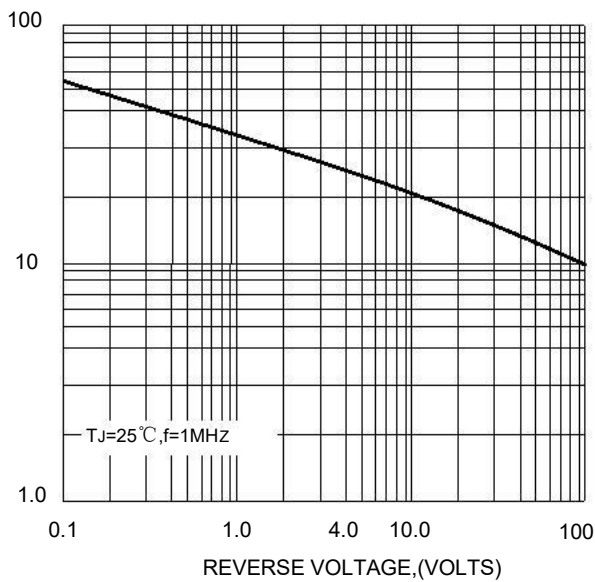


FIG.4-TYPICAL FORWARD CHARACTERISTICS


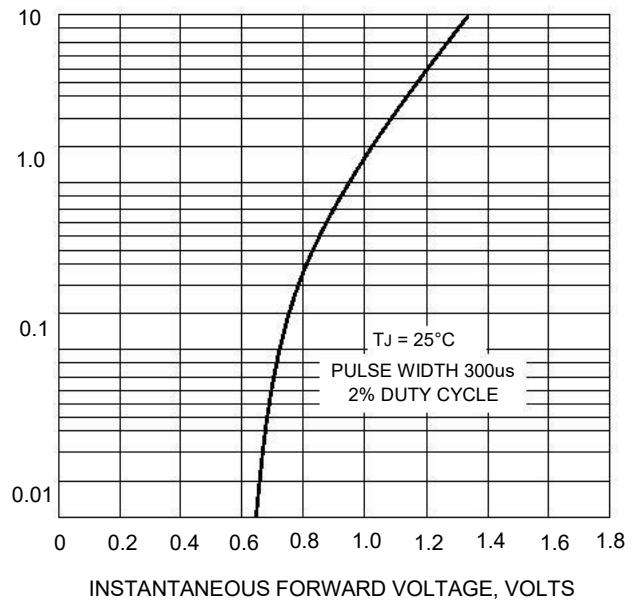


FIG.5-TYPICAL REVERSE CHARACTERISTICS

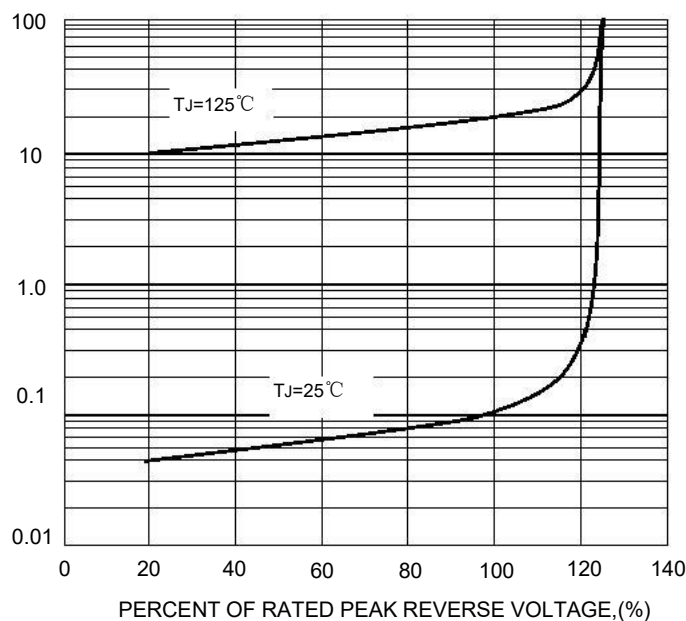

单击下面可查看定价，库存，交付和生命周期等信息

[>>COMON\(阔迈\)](#)