

### ● Description

The KMOC3021 、KMOC3022 、KMOC3023 series are optically isolated TRIAC driver devices. These series contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a TRIAC. They are designed for interfacing between electronic controls and power TRIACs to control resistive and inductive loads for 115 VAC operations.


### ● Features

1. Pb free and RoHS compliant
2. 400V peak blocking voltage
3. Simplifies logic control of 115 VAC power
4. Non zero voltage crossing
5. Isolation voltage between input and output (Viso : 5300Vms)
6. MSL class 1
7. Agency Approvals :
  - UL Approved (No. E169586): UL1577
  - c-UL Approved (No. E169586)
  - VDE Approved (No. 101347): DIN EN60747-5-5
  - FIMKO Approved: EN60065, EN60950
  - SEMKO Approved: EN60065
  - CQC Approved: GB8898-2011, GB4943.1-2011

### ● Applications

- Solenoid/Valve controls
- Lighting controls
- Static power switches
- AC motor drives
- Temperature controls
- E.M contactors
- AC motor contactors
- Solid state relay
- Programmable controllers

### ● Schematic




1. Anode
2. Cathode
3. NC
4. Main terminal
6. Main terminal


### ● Outside Dimension

Unit : mm


#### 1. Dual-in-line type.

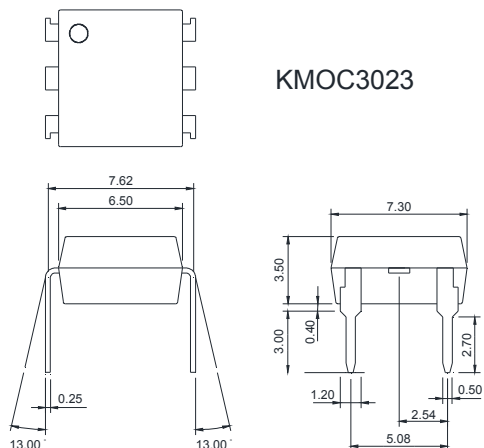


#### 2. Surface mount type.

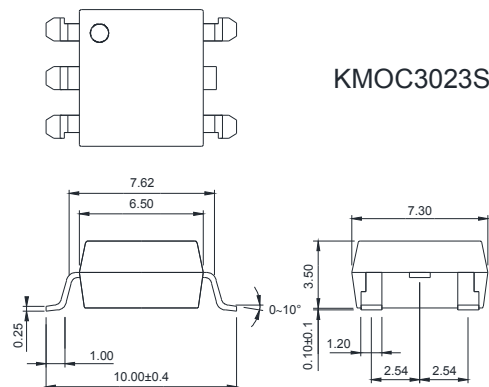

#### 3. Long creepage distance type.

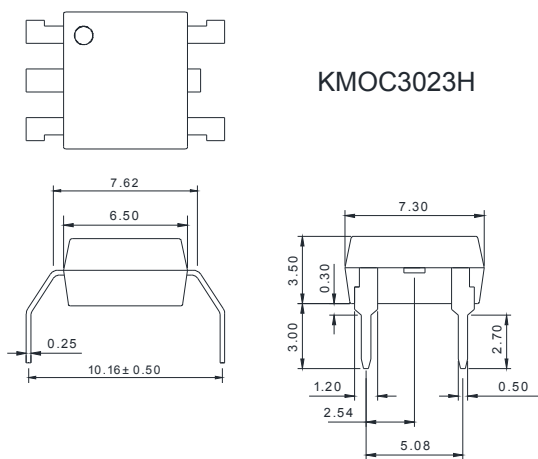


#### 4. Long creepage distance for surface mount type.

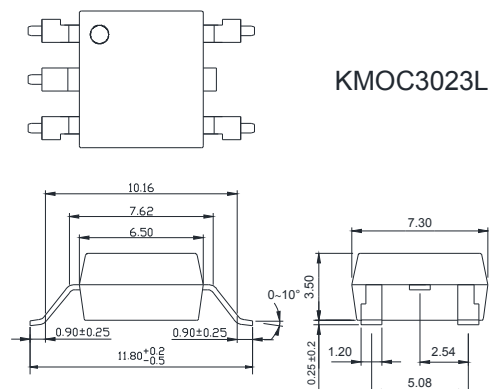

TOLERANCE : ±0.2mm

### ● Device Marking



#### Notes :

cosmo

3021 、 3022 、 3023

YWW

Y : Year code / W : Week code

### ● Absolute Maximum Ratings

(Ta=25°C)


| Parameter                        |                                                | Symbol       | Rating      | Unit       |
|----------------------------------|------------------------------------------------|--------------|-------------|------------|
| Input                            | Forward current                                | $I_F$        | 50          | mA         |
|                                  | Peak forward current                           | $I_{FP}$     | 1           | A          |
|                                  | Reverse voltage                                | $V_R$        | 6           | V          |
|                                  | Power dissipation                              | $P_D$        | 70          | mW         |
| Output                           | Off-state output terminal voltage              | $V_{DRM}$    | 400         | $V_{PEAK}$ |
|                                  | On-state R.M.S. current                        | $I_{T(RMS)}$ | 100         | mA         |
|                                  | Peak repetitive surge current (PW=10ms.DC 10%) | $I_{TSM}$    | 1           | A          |
|                                  | Power dissipation                              | $P_D$        | 300         | mW         |
| Total power dissipation          |                                                | $P_{tot}$    | 330         | mW         |
| Isolation voltage 1 minute       |                                                | $V_{iso}$    | 5300        | Vrms       |
| Operating temperature            |                                                | $T_{opr}$    | -40 to +115 | °C         |
| Storage temperature              |                                                | $T_{stg}$    | -50 to +125 | °C         |
| Soldering temperature 10 seconds |                                                | $T_{sol}$    | 260         | °C         |

### ● Electro-optical Characteristics


(Ta=25°C)

| Parameter                |                                            | Symbol    | Conditions                          | Min.               | Typ.      | Max. | Unit |
|--------------------------|--------------------------------------------|-----------|-------------------------------------|--------------------|-----------|------|------|
| Input                    | Forward voltage                            | $V_F$     | $I_F=10mA$                          | -                  | 1.2       | 1.4  | V    |
|                          | Reverse current                            | $I_R$     | $V_R=4V$                            | -                  | -         | 10   | μA   |
| Output                   | Peak blocking current                      | $I_{DRM}$ | $V_{DRM}$ Rated                     | -                  | -         | 100  | nA   |
|                          | On-state voltage                           | $V_{TM}$  | $I_{TM}=100mA$                      | -                  | 1.6       | 3    | V    |
| Transfer characteristics | Holding current                            | $I_H$     |                                     | -                  | 0.1       | -    | mA   |
|                          | Critical rate of rise of off-state voltage | $dv/dt$   | $V_{DRM}=(1/\sqrt{2})*\text{Rated}$ | 1000               | -         | -    | V/μs |
|                          | Isolation resistance                       | $R_{iso}$ | DC500V                              | $5 \times 10^{10}$ | $10^{11}$ | -    | Ω    |
|                          | Minimum trigger current                    | $I_{FT}$  | Main terminal voltage=3V            |                    |           |      |      |
|                          |                                            |           | KMOC3021                            | -                  | -         | 15   | mA   |
|                          |                                            |           | KMOC3022                            | -                  | -         | 10   | mA   |
|                          | Turn-on time                               | $T_{ON}$  | $V_D=6V, R_L=100\Omega, I_F=20mA$   | -                  | -         | 100  | μs   |


### ● Static dv/dt Test Circuit

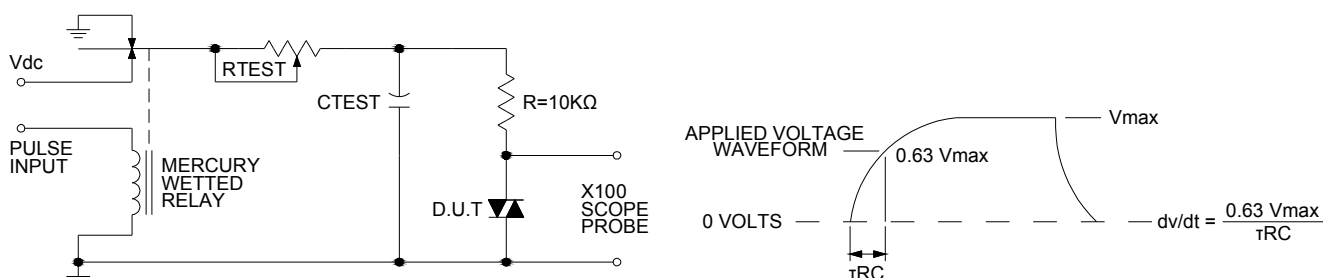


**Fig.1 Forward Current vs. Ambient Temperature**

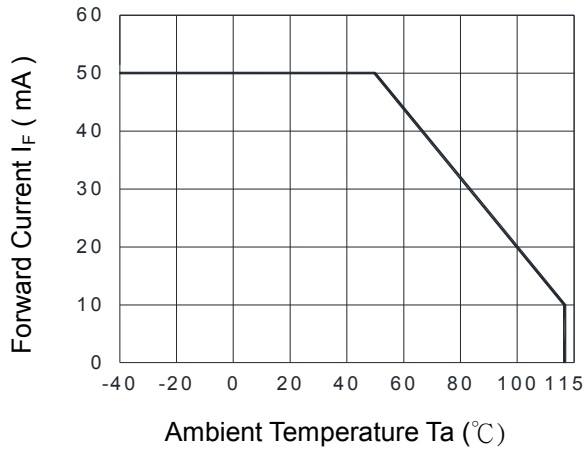


**Fig.2 Diode Power Dissipation vs. Ambient Temperature**

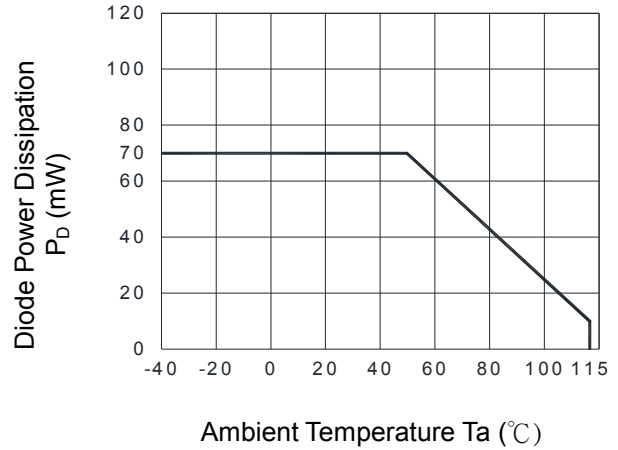


**Fig.3 On-state R.M.S. Current vs. Ambient Temperature**

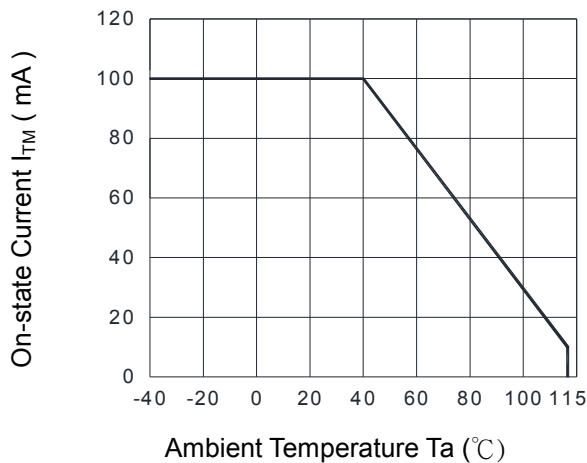


**Fig.4 Total Power Dissipation vs. Ambient Temperature**

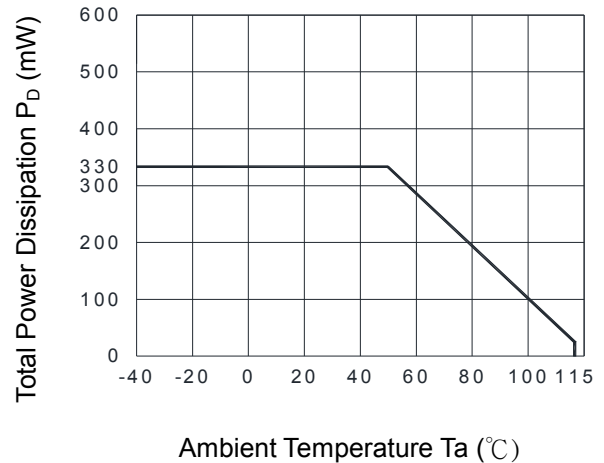


**Fig.5 Peak Forward Current vs. Duty Ratio**

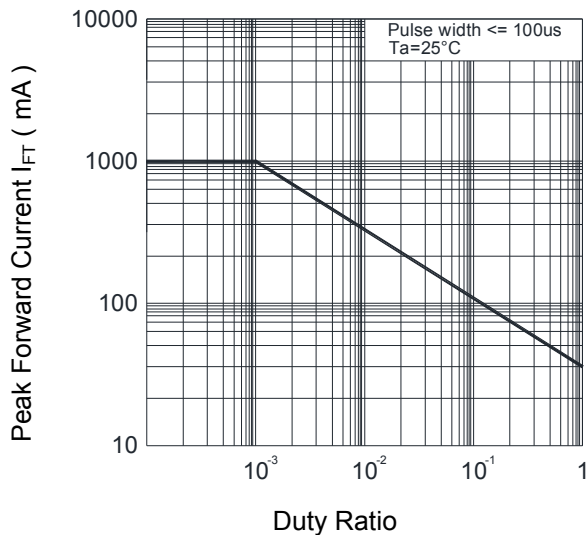


**Fig.6 Forward Current vs. Forward Voltage**

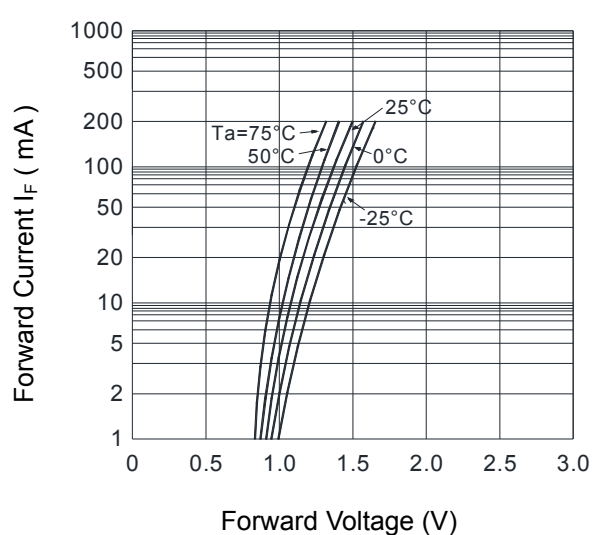


**Fig.7 On-state Characteristics**

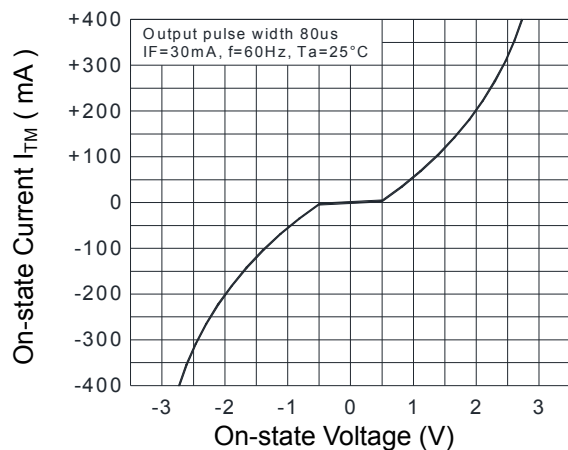

**Fig.8 Leakage with LED off vs. Ambient Temperature**

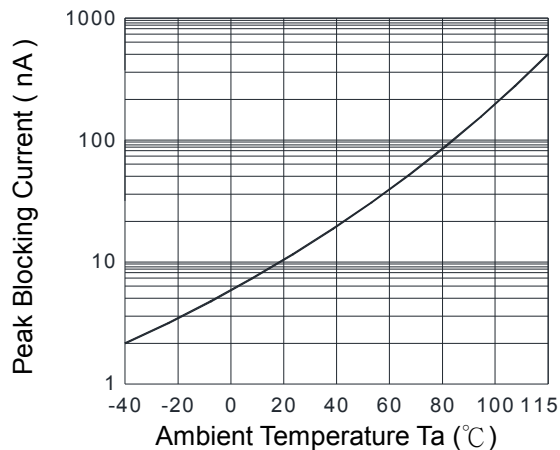

**Fig.9 Trigger Current vs. Ambient Temperature**

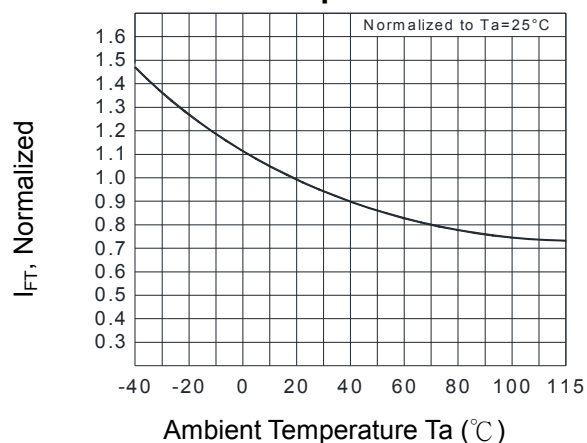


### ● Recommended Soldering Conditions

#### (a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature : 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Time(s) of reflow : Two
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### Recommended Temperature Profile of Infrared Reflow

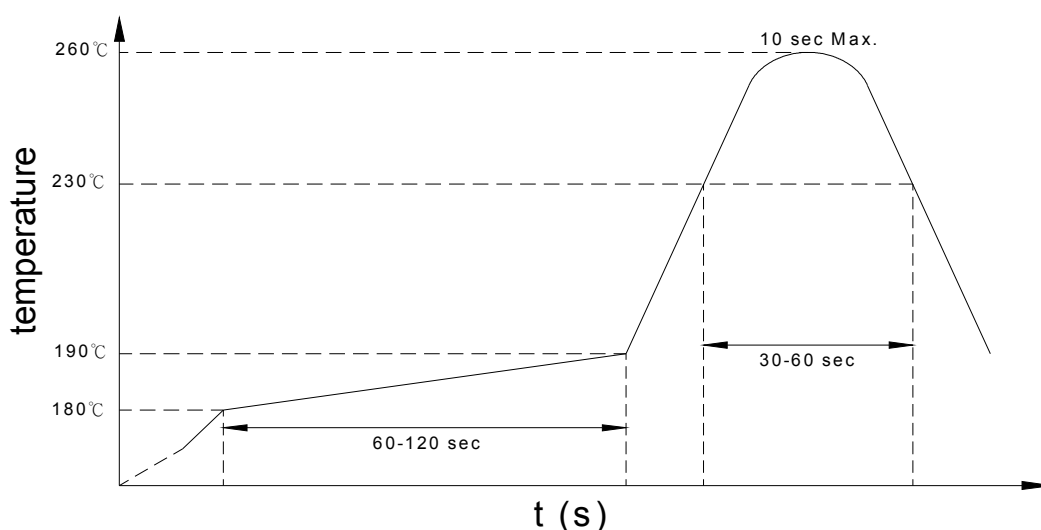

#### (b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions : 120°C or below (package surface temperature)
- Time(s) of reflow : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### (c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

### ● Numbering System

**KMOC3021 X (Y)**

**KMOC3022 X (Y)**

**KMOC3023 X (Y)**

### Notes :

KMOC3021 / KMOC3022 / KMOC3023 = Part No.


X = Lead form option ( blank 、 S 、 H 、 L )

Y = Tape and reel option ( TL 、 TR 、 TLD 、 TRU )


| Option  | Description                                                                    | Packing quantity    |
|---------|--------------------------------------------------------------------------------|---------------------|
| S (TL)  | surface mount type package + TL tape & reel option                             | 1000 units per reel |
| S (TR)  | surface mount type package + TR tape & reel option                             | 1000 units per reel |
| L (TLD) | long creepage distance for surface mount type package + TLD tape & reel option | 1000 units per reel |
| L (TRU) | long creepage distance for surface mount type package + TRU tape & reel option | 1000 units per reel |

### ● Recommended Pad Layout for Surface Mount Lead Form

#### 1. Surface mount type.


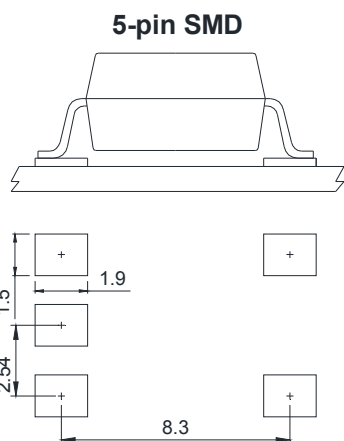


#### 2. Long creepage distance for surface mount type.




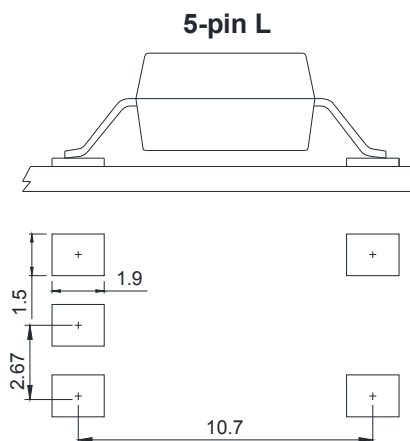


Unit : mm

### ● SMD Carrier Tape & Reel

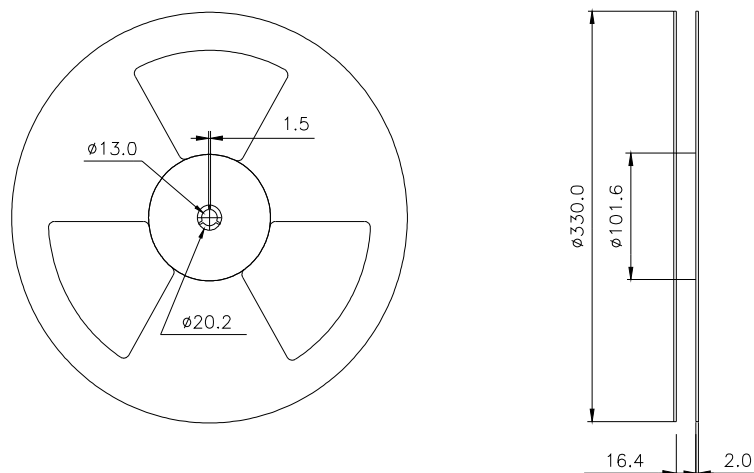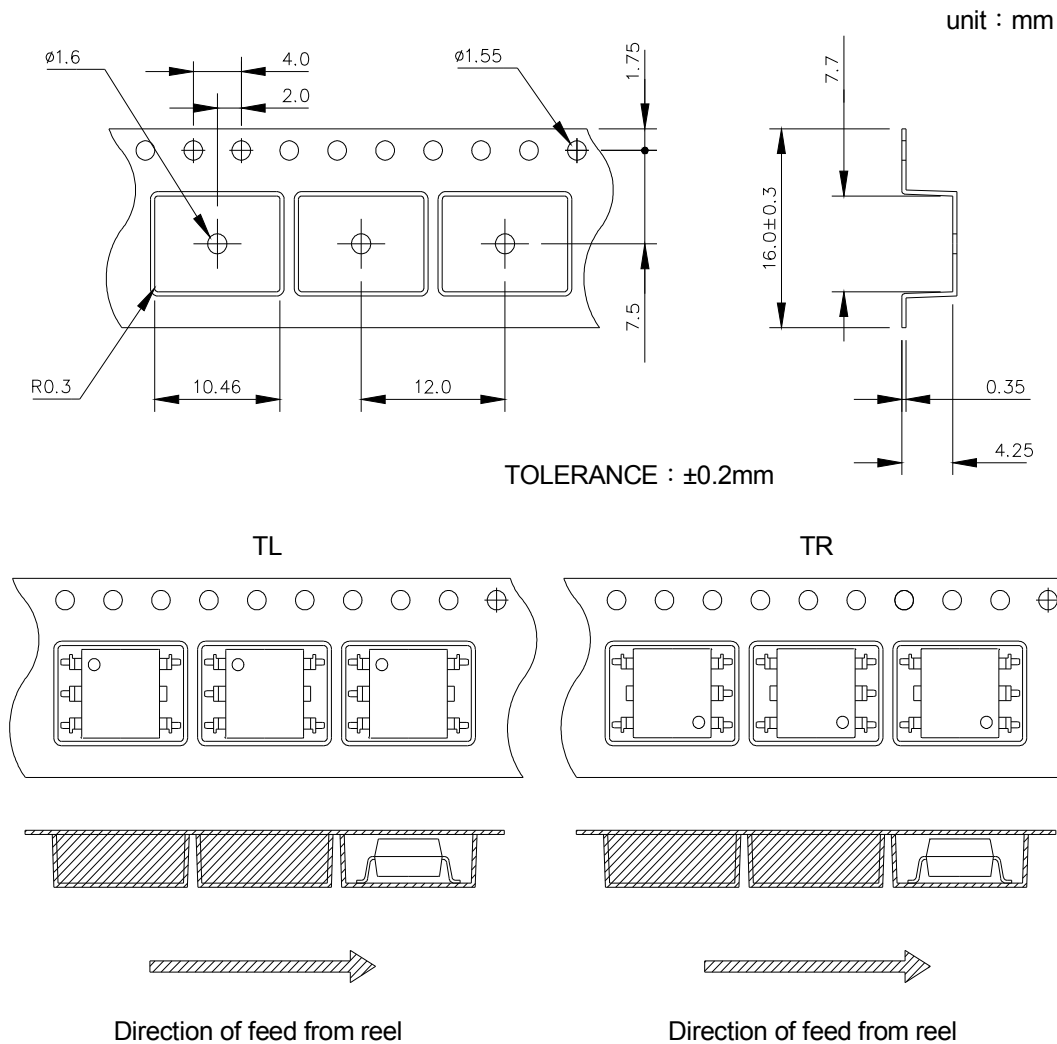

### ● L Carrier Tape & Reel

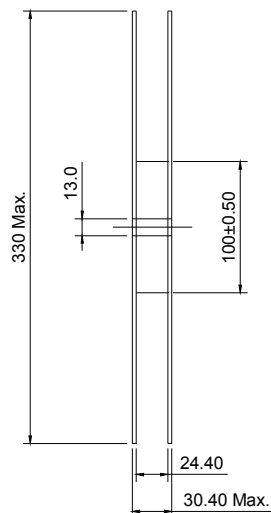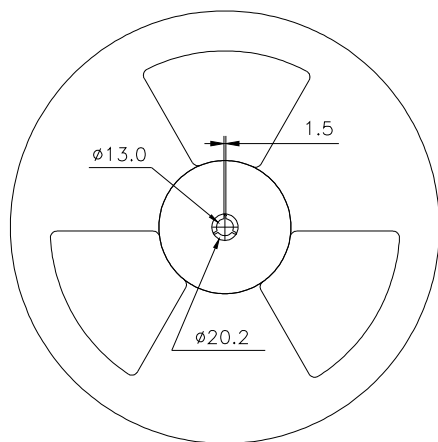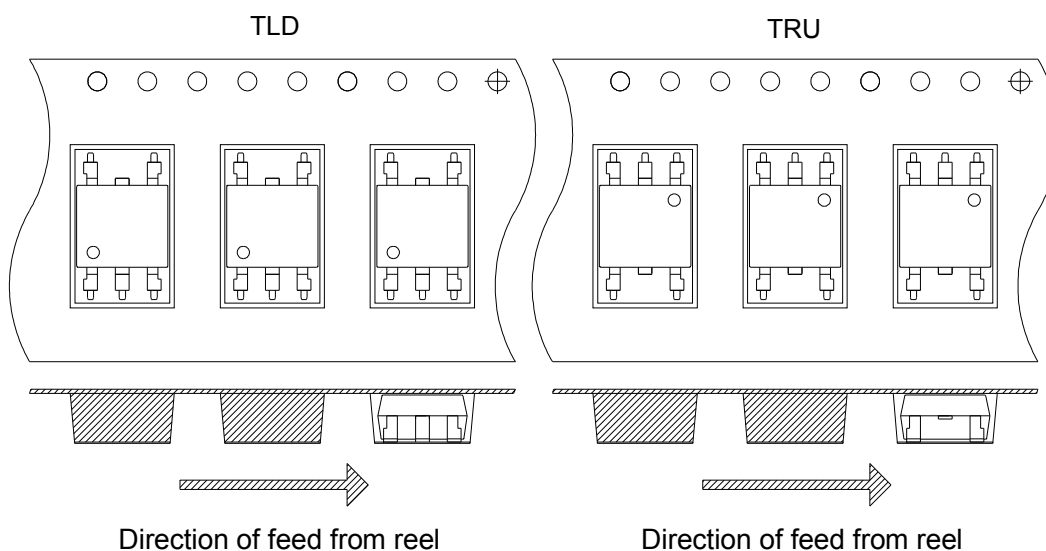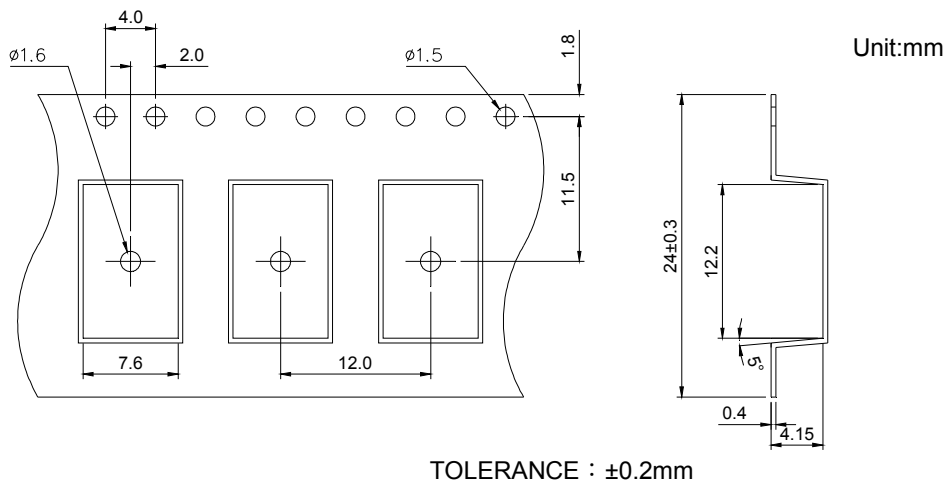

### ● Application Notice

The content of datasheet is the guidance for product use only. cosmo takes no responsibility to the accuracy of the information provided here. For continuously improving all of products, including quality, reliability, function...etc., cosmo reserves the right to change the specification, characteristics, data, materials, and structure of products without notice. Please contact with cosmo to obtain the latest specification.

It would be required to comply with the absolute maximum ratings listed in the specification. cosmo has no liability and responsibility to the damage caused by improper use of the products.

cosmo products are intended to be designed for use in general electronics application list below:

- a. Personal computer
- b. OA machine
- c. Audio / Video
- d. Instrumentation
- e. Electrical application
- f. Measurement equipment
- g. Consumer electronics
- h. Telecommunication

cosmo devices shall not be used or related with equipment requiring higher level of quality / reliability, or malfunction, or failure which may cause loss of human life, bodily injury, includes, without limitation:

- a. Medical and other life supporting equipments
- b. Space application
- c. Telecommunication equipment (trunk lines)
- d. Nuclear power control
- e. Equipment used for automotive vehicles, trains, ships...etc.

This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or any means electronically or mechanically for any purpose, in whole or in part without any written permission expressed from cosmo.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Cosmo](#)