

50G Optical DSP




Seagull 50

2 x 25G NRZ \rightleftharpoons 1 x 53G PAM4

1 x 53G PAM4 \rightleftharpoons 1 x 53G PAM4

Seagull 50 (**CFD10101**) is a versatile full-duplex device that comes with industry leading power dissipation and can be used in next-generation QSFP28, DSFP, and SFP56 pluggable optical transceivers. It supports 50Gbps SR/DR/FR/LR and ER applications based on PAM4 modulation. Seagull 50 operates over the full industrial temperature range of -40°C to +85°C module case and is ideal for use in enterprise data centers and 5G wireless/eCPRI front-, mid- and back-haul applications.

Seagull 50 is a dual-mode DSP and can be used as a gearbox or retimer. In gearbox mode, the IC is configured as two lanes of 24.33-25.78Gbps NRZ on the host side to one lane of 50.135-53.125Gbps PAM4 on the line side. In retimer mode, the DSP is configured as one lane of 50.135-53.125Gbps PAM4 to one lane of 50.135-53.125Gbps PAM4.

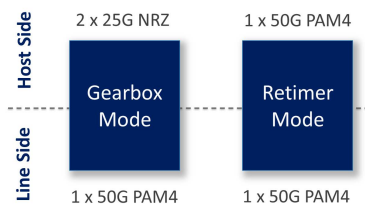

Seagull 50 employs proprietary DSP technology and equalization techniques. The DSP is especially critical in 5G wireless applications where cost-effective solutions are required, leading to wider use of DML lasers, and ultimate push for uncooled optics. The DSP helps to compensate for the optical impairments and nonlinearities resulting from optics, wider temperature range and fiber, and provides a high performance, robust solution.


Applications

- 5G wireless front-haul
- 5G wireless mid-haul/back-haul
- Enterprise data centers

Key Parameters

Host Side	2 x 25G NRZ or 1 x 53G PAM4
Line Side	1 x 53G PAM4
Package Size	5mm x 5mm
Operating Temp	-40° to 85°C
Communication Interface	MDIO / I ² C
Process	CMOS

Pluggable Optical Transceiver Block Diagrams

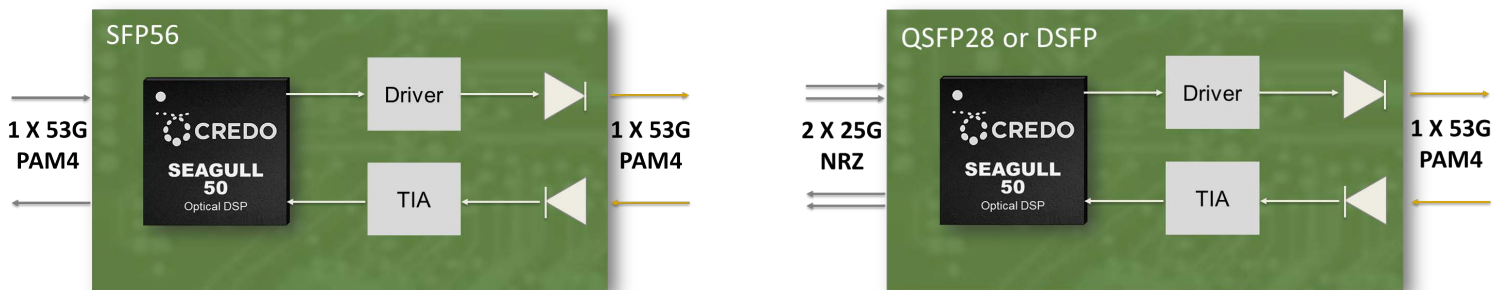

Key Features

- DSP with industry-leading performance
- Adaptive CTLE and multi-tap DFE and FFE on line and host side receivers
- Multi-tap FIR filter on line and host side transmitters
- Flexible configuration in gearbox or mux mode
- LOS and LOL detection
- Diagnostic features including pattern generators and checkers, eye monitor and loopbacks
- Optimized, compact firmware
- Low power dissipation enables 1.5W optical transceivers
- Industrial temperature support -40°C to +85°C

Supported Standards and Interfaces

- IEEE802.3 50GBASE-SR/FR/LR/ER
- IEEE 802.3 50GAUI-1 and 50GAUI-2
- eCPRI
- CEI-56G-VSR-NRZ and CEI-56G-VSR-PAM4

For more information please visit www.credosemi.com or email sales@credosemi.com.

© 2020 Credo Semiconductor, Inc. All Rights Reserved. Credo Semiconductor Inc. and the Credo logo are trademarks of Credo Semiconductor Inc. All other marks are the property of their respective owners. This document is for information only. Specifications are subject to change without notice.

REV 082720

单击下面可查看定价，库存，交付和生命周期等信息

[>>Credo](#)