

2.5V/3.3V LVPECL XO

NX322



3.2 x 2.5mm Ceramic SMD

Product Features

- Very low phase jitter - < 1.0ps RMS max.
- Wide frequency range - 5 ~ 1000MHz
- Thicker crystal for improved reliability
- Low supply current - 80mA max.
- Industrial Temperature Range
- Pb-free & RoHS compliant
- Fast lead time




Product Description

The NX322 XO series is a high performance LVPECL crystal oscillator family with very low jitter performance. It supports various options including wider frequency range, 2.5V/3.3V voltage, and various stabilities. It is designed to meet the clock source specifications for communication systems, and other high performance equipment.

Applications

- Networking systems
- Servers and storage systems
- Profession video equipments
- Test and measurement
- FPGA/ASIC clock generation

Package: (Scale: none; dimensions are in mm)

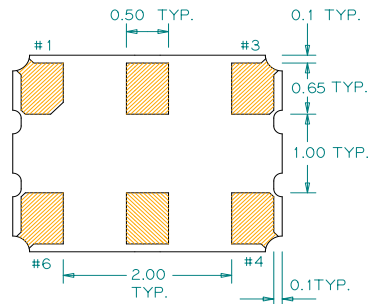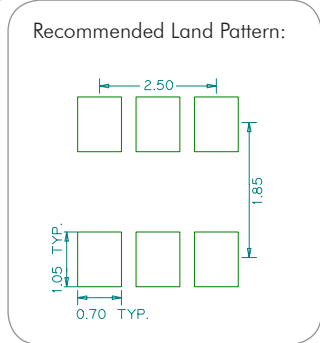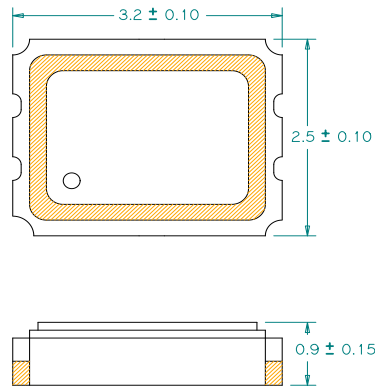

Pin Functions:

| Pin | Function |
|-----|-------------|
| 1 | OE Function |
| 2 | N/C |
| 3 | Ground |
| 4 | Q |
| 5 | \bar{Q} |
| 6 | VCC |

*Extended high frequency power decoupling is recommended (see test circuit for minimum recommendation). To ensure optimal performance, do not route RF traces beneath the package.

Part Ordering Information:

NX 322 V 1 FFFF.FFFFFFFF

Voltage:
1 = +3.3V
2 = +2.5V

Stability and Temp Range:

| Stability | Temp Range |
|---------------|------------|
| A = +/-20 ppm | -20/+70°C |
| B = +/-25 ppm | -20/+70°C |
| C = +/-50 ppm | -20/+70°C |
| D = +/-25 ppm | -40/+85°C |
| E = +/-50 ppm | -40/+85°C |

Frequency:

FFFF.FFFFFFFF

MHz, "4 digits/decimal/6 digits" format

Electrical Performance

| Parameter | Min. | Typ. | Max. | Units | Notes |
|--------------------------------------|---|------|-----------------------|-------|--------------------------------|
| Output Frequency | 5 | | 1000 | MHz | |
| Supply Voltage | 3.135 | 3.3 | 3.465 | V | See ordering options |
| | 2.375 | 2.5 | 2.625 | | |
| Supply Current, Output Enabled | | | 80 | mA | |
| Supply Current, Output Disabled only | | | 40 | mA | |
| Frequency Stability | | | ±50 | ppm | See ordering options |
| Operating Temperature Range | -40 | | +85 | °C | See ordering options |
| Output Logic 0, V _{OL} | | | V _{CC} -1.55 | V | |
| Output Logic 1, V _{OH} | V _{CC} -1.2 | | | V | |
| Output Load | 50Ω to V _{CC} -2V output termination | | | | |
| Duty Cycle | 45 | | 55 | % | Measured 50% V _{CC} |
| Rise and Fall Time | | | 400 | ps | Measured 20/80% of waveform |
| Jitter, Accumulated, RMS (1-σ) | | | 6 | ps | 20.000 adjacent periods |
| Jitter, Phase, RMS | < 40MHz | 0.4 | 1 | ps | 12kHz to 5 MHz frequency band |
| | 40 to 1000MHz | 0.4 | 1 | ps | 12kHz to 20 MHz frequency band |
| | 125MHz, 156.25MHz | 0.4 | 0.6 | ps | 12kHz to 20 MHz frequency band |
| Jitter, pk-pk | | | 40 | ps | 100,000 random periods |

Notes:

- Stability includes all combinations of operating temperature, load changes, rated input (supply) voltage changes, initial calibration tolerance (25°C), aging (1 year at 25°C average effective ambient temperature), shock and vibration.
- Phase jitter typical value is depending on output frequencies.
- For specifications other than those listed, please contact sales.

Output Enable / Disable Function

| Parameter | Min. | Typ. | Max. | Units | Notes |
|---|---------------------|------|---------------------|-------|----------------|
| Input Voltage (pin 1), Output Enable | 0.7 V _{CC} | | | V | or open |
| Input Voltage (pin 1), Output Disable (low power standby) | | | 0.3 V _{CC} | V | Output is Hi-Z |
| Output Disable Delay | | | 100 | ns | |
| Output Enable Delay | | | 100 | ns | |
| Start up Time | | | 10 | ms | |

Absolute Maximum Ratings

| Parameter | Min. | Typ. | Max. | Units | Notes |
|---------------------|------|------|------|-------|-------|
| Storage Temperature | -55 | | +125 | °C | |

For the latest product information visit: <http://www.pericom.com/products/crystals-and-crystal-oscillators/hiflex-xo/?part=NX322>

For test circuit go to: http://www.pericom.com/pdf/sre/tc_pecl.pdf

For soldering reflow profile and reliability test ratings go to: <http://www.pericom.com/pdf/sre/reflow.pdf>

For tape and reel information go to: http://www.pericom.com/pdf/sre/tr_3225_xo.pdf

单击下面可查看定价，库存，交付和生命周期等信息

[>>Diodes Incorporated\(达达科技\(美台\)\)](#)