

<b>TRANSISTOR (PNP)</b>	
<p><b>SOT-523</b></p> <p>COLLECTOR</p> <p>BASE</p> <p>EMITTER</p> <p>Marking :2TY</p>	<p><b>Features</b></p> <p><b>Complimentary to S8050T</b></p> <p><b>Collector current: <math>I_C=0.5A</math></b></p>





**MAXIMUM RATINGS ( $T_A=25^\circ C$  unless otherwise noted)**

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	-40	V
$V_{CEO}$	Collector-Emitter Voltage	-25	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current -Continuous	-0.5	A
$P_C$	Collector Power Dissipation	0.2	W
$T_j$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature	-55-150	$^\circ C$


**ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ C$  unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
<b>Collector-base breakdown voltage</b>	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E=0$	-40		V
<b>Collector-emitter breakdown voltage</b>	$V_{(BR)CEO}$	$I_C = -1mA, I_B=0$	-25		V
<b>Emitter-base breakdown voltage</b>	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C=0$	-5		V
<b>Collector cut-off current</b>	$I_{CBO}$	$V_{CB} = -40V, I_E=0$		-0.1	$\mu A$
<b>Collector cut-off current</b>	$I_{CEO}$	$V_{CE} = -20V, I_B=0$		-0.1	$\mu A$
<b>Emitter cut-off current</b>	$I_{EBO}$	$V_{EB} = -3V, I_C=0$		-0.1	$\mu A$
<b>DC current gain</b>	$h_{FE(1)}$	$V_{CE} = -1V, I_C = -50mA$	120	400	
	$h_{FE(2)}$	$V_{CE} = -1V, I_C = -500mA$	50		
<b>Collector-emitter saturation voltage</b>	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$		-0.6	V
<b>Base-emitter saturation voltage</b>	$V_{BE(sat)}$	$I_C = -500mA, I_B = -50mA$		-1.2	V
<b>Transition frequency</b>	$f_T$	$V_{CE} = -6V, I_C = -20mA$ $f = 30MHz$	150		MHz

## Typical Characteristics

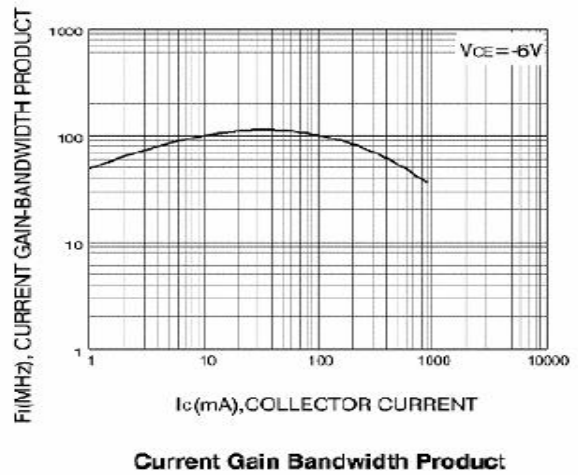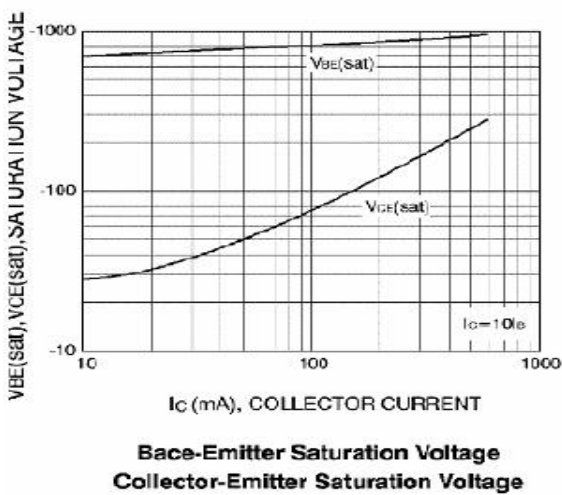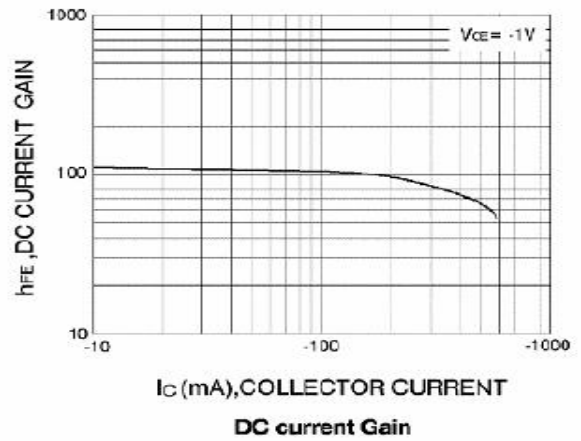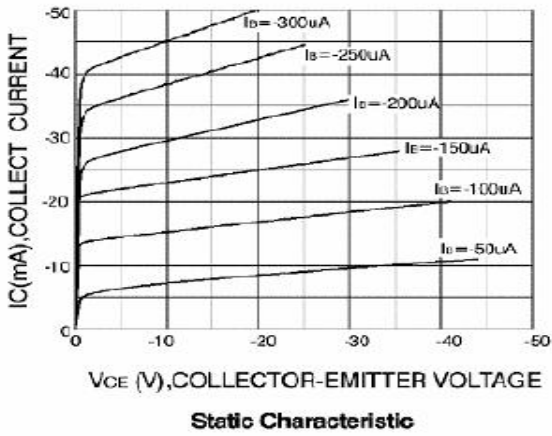

**SOT-523 PACKAGE OUTLINE DIMENSIONS**

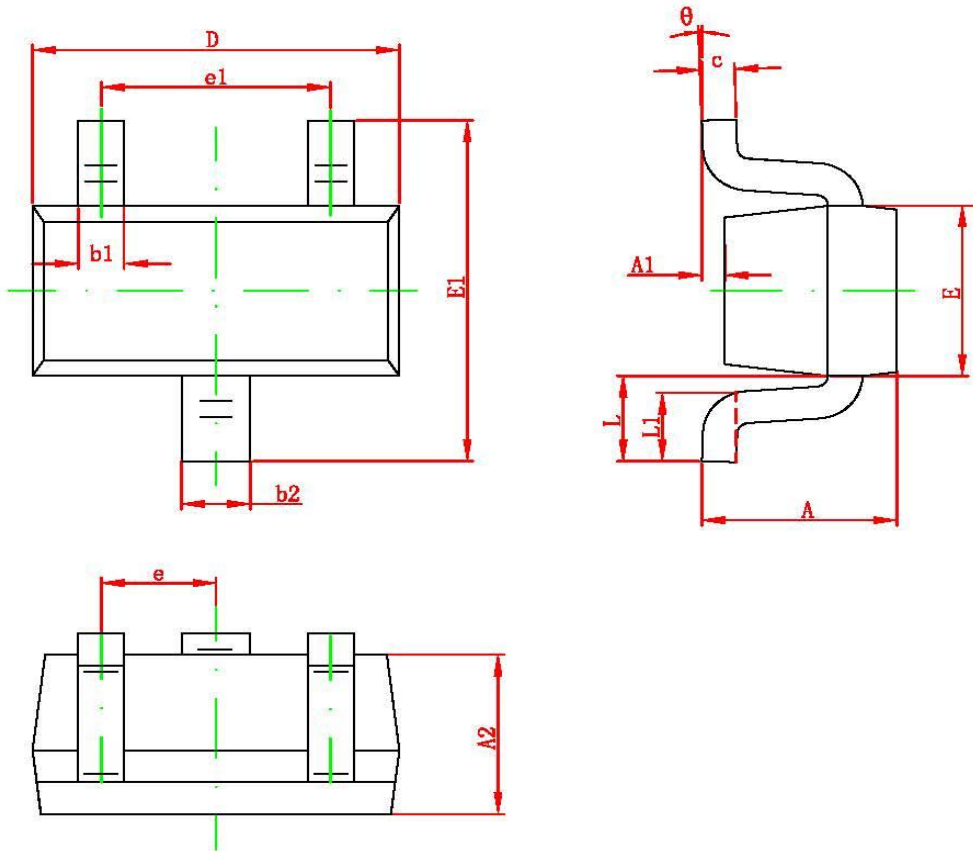

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

单击下面可查看定价，库存，交付和生命周期等信息

[>>DIOS\(迪恩思\)](#)