

# PTSA1206

## Automotive SMD PTC fuses



### Product features

- AEC-Q200 qualified
- Positive temperature coefficient (PTC)
- Surface mount resettable fuse
- Compact 1206 (3216 metric) footprint
- Low resistance
- Fast time-to-trip
- Current rating from 0.10 to 0.50 A
- Voltage rating from 13.2 V to 60 V

### Applications

- Infotainment
- In-vehicle navigation
- Telematics
- Car lighting
- Power window and seat control
- Instrument clusters
- PCB trace protection

### Environmental compliance



### Part number system/ordering:

#### **PTSA120660V010**

- PT= PTC resettable fuse
- S= Surface mount
- A= Automotive
- 1206= Dimension code
- 60V= Maximum voltage
- 010= Ihold current rating (010= 0.10 A)




*Powering Business Worldwide*

**Product specifications**


Part number	Vmax <sup>1</sup>	I <sub>max</sub> <sup>2</sup>	I <sub>hold</sub> <sup>3</sup>	I <sub>trip</sub> <sup>4</sup>	Pd <sup>5</sup>	Time-to-trip (maximum)		Resistance <sup>6</sup>		Part marking
	(V <sub>dc</sub> )	(A)	(A)	(A)	typical (W)	(A)	(seconds)	Initial (R <sub>i</sub> ) minimum (Ω)	Post trip (R <sub>p</sub> ) maximum (Ω)	
PTSA120660V010	60	10	0.10	0.25	0.6	1.0	0.2	1.6	15	U
PTSA120648V012	48	10	0.12	0.39	0.6	1.0	0.3	1.2	15	P
PTSA120648V016	48	10	0.16	0.45	0.6	1.0	0.4	1.1	5.0	T
PTSA120624V020	24	40	0.20	0.42	0.6	8.0	0.1	0.3	3.1	C
PTSA120616V025	16	40	0.25	0.58	0.6	8.0	0.1	0.2	2.3	C
PTSA120616V035	16	40	0.35	0.75	0.6	8.0	0.1	0.1	1.35	W
PTSA120613V050	13.2	40	0.50	1.10	0.6	8.0	0.1	0.08	0.75	A

- V<sub>max</sub>: Maximum continuous voltage the device can withstand without damage at rated current
- I<sub>max</sub>: Maximum fault current the device can withstand without damage at rated voltage
- I<sub>hold</sub>: Maximum current the device will pass without interruption at +23 °C still air
- I<sub>trip</sub>: Minimum current that will transition the device from low resistance to high resistance at +23 °C still air
- Pd: Power dissipated from the device when in tripped state at +23 °C still air
- R<sub>i</sub>: Minimum resistance of the device at +23 °C  
R<sub>p</sub>: Maximum resistance of the device one hour after tripping at +23 °C

**Dimensions—mm**

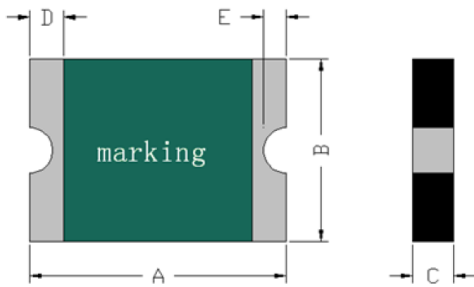

**Recommended pad layout**



Part number	A typ	A max	B typ	B max	C typ	C max	D min	E min	F	G	H
PTSA120660V010	3.35	3.50	1.70	1.80	0.85	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120648V012	3.35	3.50	1.70	1.80	0.85	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120648V016	3.35	3.50	1.70	1.80	0.85	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120624V020	3.35	3.50	1.70	1.80	0.55	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120616V025	3.35	3.50	1.70	1.80	0.60	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120616V035	3.35	3.50	1.70	1.80	0.55	1.00	0.25	0.10	1.8	1.0	1.8
PTSA120613V050	3.35	3.50	1.70	1.80	0.55	1.00	0.25	0.10	1.8	1.0	1.8

**Thermal derating chart - I<sub>hold</sub> (A)**


Part number	Maximum ambient temperature (°C)								
	-40	-20	0	25	40	50	60	70	85
PTSA120660V010	0.17	0.15	0.13	0.10	0.09	0.08	0.07	0.06	0.04
PTSA120648V012	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.05
PTSA120648V016	0.25	0.20	0.18	0.16	0.14	0.12	0.11	0.09	0.06
PTSA120624V020	0.31	0.26	0.22	0.20	0.18	0.16	0.15	0.13	0.07
PTSA120616V025	0.38	0.33	0.28	0.25	0.23	0.20	0.19	0.16	0.10
PTSA120616V035	0.51	0.46	0.39	0.35	0.30	0.27	0.24	0.20	0.16
PTSA120613V050	0.77	0.64	0.56	0.50	0.45	0.40	0.35	0.32	0.23

**General specifications**

Operating temperature: -40 °C to + 85 °C (with derating)
Storage temperature: -10 °C to + 40 °C
Storage relative humidity: ≤70%
Storage condition: Keep away from corrosive atmosphere and sunlight
Passive aging: IEC60738-1 , +60 °C, 1000 hours, ≤ 20% IEC60738-1 , +85 °C, 1000 hours, ≤ 20%
Humidity aging: +85 °C, 85% RH, 100 hours, ± ≤ 20%
Thermal shock: IEC60738-1, +85 °C/ -40 °C, 20 cycles, ≤ 50%
Trip cycle life: UL1434, Vmax, Imax, 100 cycles, no arcing or burning
Trip endurance: UL1434, Vmax, Itrip ≤ I ≤ Imax, 2 hours, no arcing or burning
MSL test: J-STD-020, MSL=1, pass and no visible damage


**Packaging information**

Supplied in tape and reel packaging, 4000 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

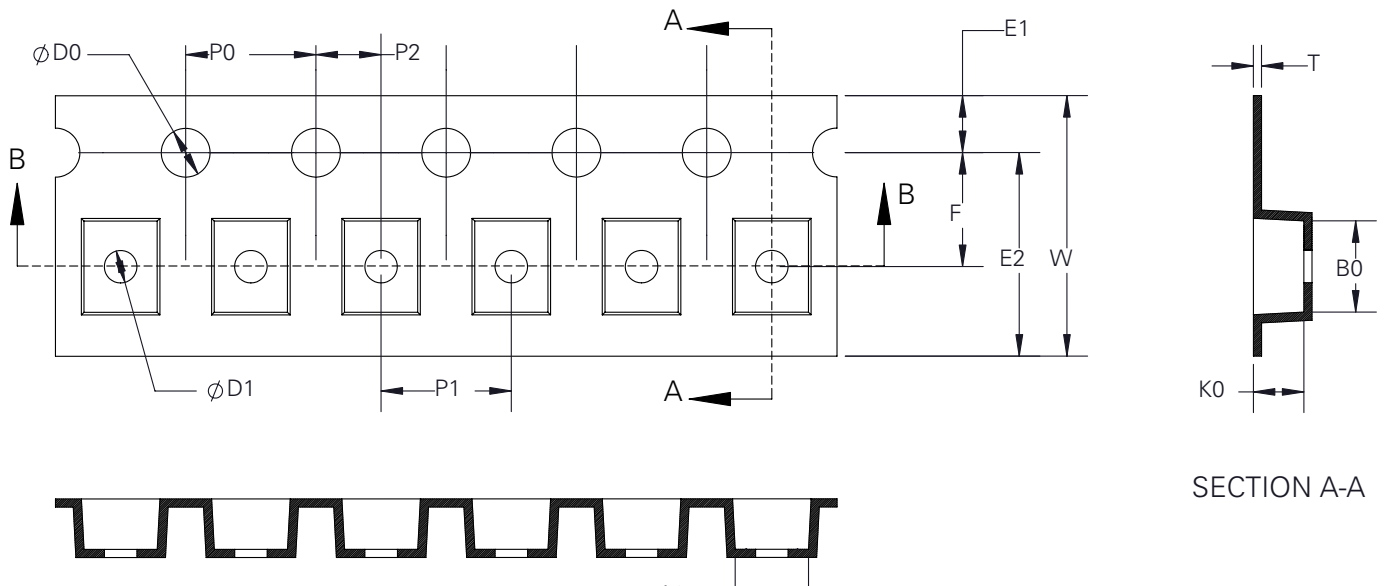

W	F	E1	E2	P0	P1	P2	D0	D1	A0	B0	K0	T
8.00 ± 0.30	3.50 ± 0.10	1.75 ± 0.10	-	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 + 0.10/-0	-	1.77 ± 0.10	3.40 ± 0.10	1.04 ± 0.10	0.22 ± 0.05

**Solder reflow profile**

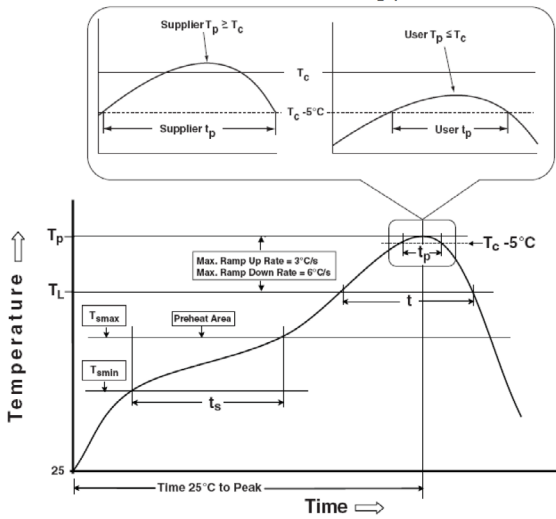

**Table 1 - Standard SnPb solder (T<sub>c</sub>)**

Package thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> ≥350
<2.5 mm)	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

**Table 2 - Lead (Pb) Free Solder (T<sub>c</sub>)**

Package thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350 - 2000	Volume mm <sup>3</sup> >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

**Reference J-STD-020**

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T <sub>smin</sub> )	100 °C	150 °C
• Temperature max. (T <sub>smax</sub> )	150 °C	200 °C
• Time (T <sub>smin</sub> to T <sub>smax</sub> ) (t <sub>s</sub> )	60-120 seconds	60-120 seconds
Ramp up rate T <sub>L</sub> to T <sub>p</sub>	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T <sub>L</sub> )	183 °C	217 °C
Time (t <sub>L</sub> ) maintained above T <sub>L</sub>	60-150 seconds	60-150 seconds
Peak package body temperature (T <sub>p</sub> )*	Table 1	Table 2
Time (t <sub>p</sub> )* within 5 °C of the specified classification temperature (T <sub>c</sub> )	20 seconds*	30 seconds*
Ramp-down rate (T <sub>p</sub> to T <sub>L</sub> )	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

\* Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
Electronics Division  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2021 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1049 BU-ELX21049  
June 2021

Eaton is a registered trademark.  
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



单击下面可查看定价，库存，交付和生命周期等信息

[>>EATON](#)