

3KE SERIES

V_{BR} : 13 - 440 Volts
P_{PK} : 3000 Watts

FEATURES :

- * 3000W surge capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time : typically less than 1.0 ps from 0 volt to V_{BR(min.)}
- * Typical I_R less than 1μA above 22V
- * **Pb / RoHS Free**

MECHANICAL DATA

- * Case : DO-201Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity : Color band denotes cathode end except Bipolar.
- * Mounting position : Any
- * Weight : 0.93 grams

DEVICES FOR BIPOLAR APPLICATIONS

For Bi-directional use C or CA Suffix
Electrical characteristics apply in both directions

MAXIMUM RATINGS

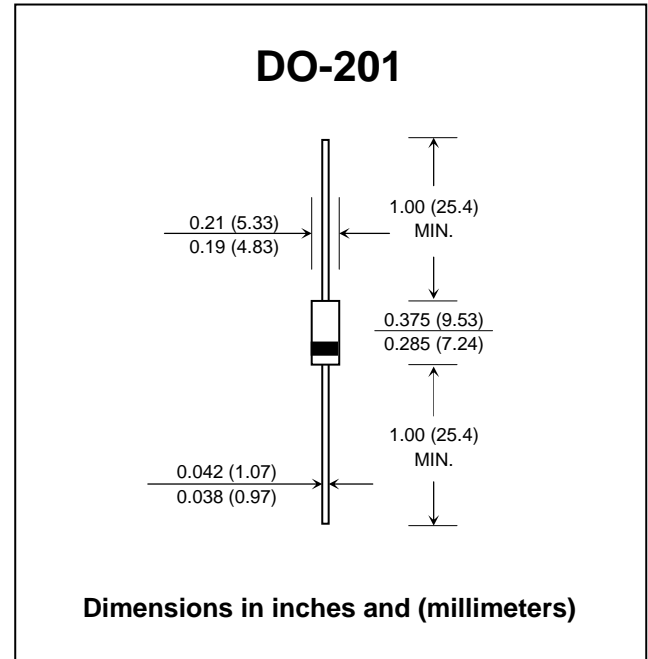
Rating at 25 °C ambient temperature unless otherwise specified.

Rating	Symbol	Value	Unit
Peak Power Dissipation at Ta = 25 °C, Tp=1ms (Note1)	P _{PK}	Minimum 3000	W
Steady State Power Dissipation at TL = 75 °C Lead Lengths 0.375", (9.5mm) (Note 2)	P _D	5.0	W
Operating and Storage Temperature Range	T _J , T _{STG}	- 65 to + 175	°C

Note :

- (1) Non-repetitive Current pulse, per Fig. 5 and derated above Ta = 25 °C per Fig. 1
- (2) Mounted on Copper Leaf area of 1.57 in² (40mm²).
- (3) 8.3 ms single half sine-wave, duty cycle = 4 pulses per minutes maximum.

TRANSIENT VOLTAGE SUPPRESSOR



ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

Type	Breakdown Voltage @ It (Note 1)			Working Peak Reverse Voltage	Maximum Reverse Leakage @ VRWM	Maximum Reverse Current	Maximum Clamping Voltage @ IRSM	Maximum Temperature Co-efficient of VBR
	VBR (V)		It (mA)					
	Min.	Max.						
3KE13	11.7	14.3	10	10.5	1000	158	19.0	0.081
3KE13A	12.4	13.7	10	11.1	1000	164	18.2	0.081
3KE15	13.5	16.5	10	12.1	500	136	22.0	0.084
3KE15A	14.3	15.8	10	12.8	500	142	21.2	0.084
3KE16	14.4	17.6	10	12.9	200	128	23.5	0.086
3KE16A	15.2	16.8	10	13.6	200	134	22.5	0.086
3KE18	16.2	19.8	1.0	14.5	50	113	26.5	0.088
3KE18A	17.1	18.9	1.0	15.3	50	119	25.2	0.088
3KE20	18.0	22.0	1.0	16.2	10	103	29.1	0.090
3KE20A	19.0	21.0	1.0	17.1	10	108	27.7	0.090
3KE22	19.8	24.2	1.0	17.8	5.0	94	31.9	0.092
3KE22A	20.9	23.1	1.0	18.8	5.0	98	30.6	0.092
3KE24	21.6	26.4	1.0	19.4	5.0	86	34.7	0.094
3KE24A	22.8	25.2	1.0	20.5	5.0	90	33.2	0.094
3KE27	24.3	29.7	1.0	21.8	5.0	77	39.1	0.096
3KE27A	25.7	28.4	1.0	23.1	5.0	80	37.5	0.096
3KE30	27.0	33.0	1.0	24.3	5.0	69	43.5	0.097
3KE30A	28.5	31.5	1.0	25.6	5.0	72	41.4	0.097
3KE33	29.7	36.3	1.0	26.8	5.0	63	47.7	0.098
3KE33A	31.4	34.7	1.0	28.2	5.0	66	45.7	0.098
3KE36	32.4	39.6	1.0	29.1	5.0	58	52.0	0.099
3KE36A	34.2	37.8	1.0	30.8	5.0	60	49.9	0.099
3KE39	35.1	42.9	1.0	31.6	5.0	53	56.4	0.100
3KE39A	37.1	41.0	1.0	33.3	5.0	56	53.9	0.100
3KE43	38.7	47.3	1.0	34.8	5.0	48	61.9	0.101
3KE43A	40.9	45.2	1.0	36.8	5.0	51	59.3	0.101
3KE47	42.3	51.7	1.0	38.1	5.0	44	67.8	0.101
3KE47A	44.7	49.4	1.0	40.2	5.0	46	64.8	0.101
3KE51	45.9	56.1	1.0	41.3	5.0	41	73.5	0.102
3KE51A	48.5	53.6	1.0	43.6	5.0	43	70.1	0.102
3KE56	50.4	61.6	1.0	45.4	5.0	37	80.5	0.103
3KE56A	53.2	58.8	1.0	47.8	5.0	39	77.0	0.103
3KE62	55.8	68.2	1.0	50.2	5.0	34	89.0	0.104
3KE62A	58.9	65.1	1.0	53.0	5.0	35.4	85.0	0.104
3KE68	61.2	74.8	1.0	55.1	5.0	30.6	98.0	0.104
3KE68A	64.6	71.4	1.0	58.1	5.0	32.6	92.0	0.104
3KE75	67.5	82.5	1.0	60.7	5.0	27.8	108	0.105
3KE75A	71.3	78.8	1.0	64.1	5.0	29.2	103	0.105
3KE82	73.8	90.2	1.0	66.4	5.0	25.4	118	0.105
3KE82A	77.9	86.1	1.0	70.1	5.0	26.6	113	0.105

ELECTRICAL CHARACTERISTICS

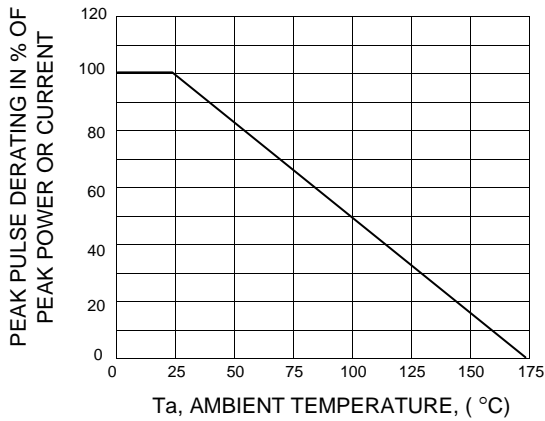
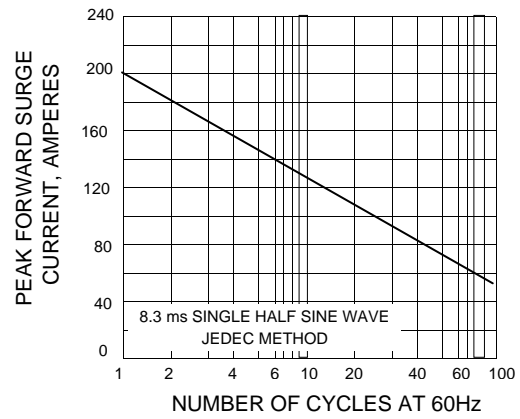
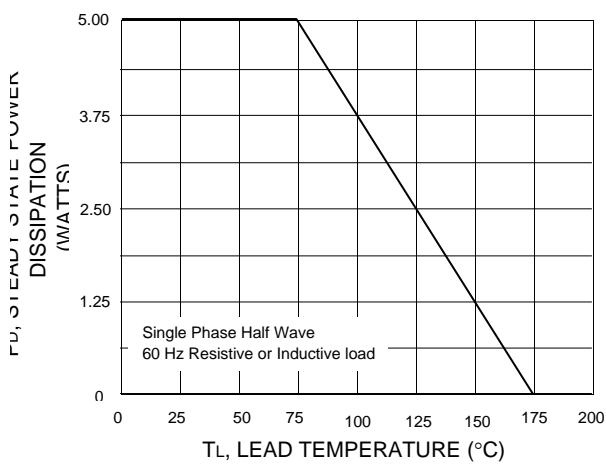
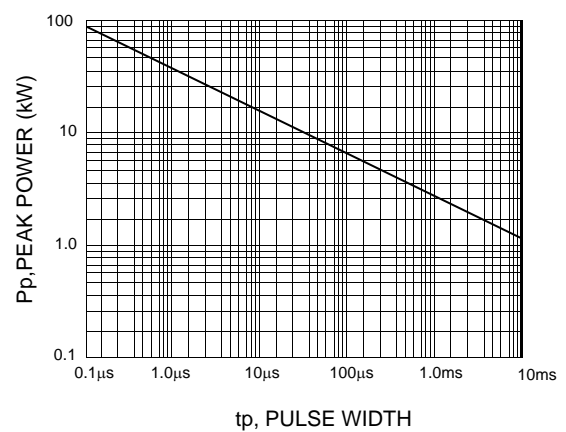
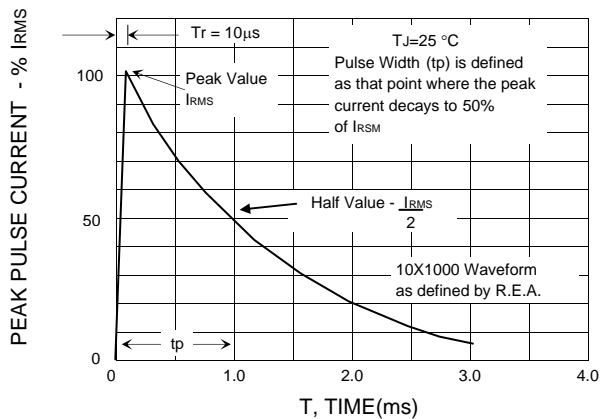
Rating at 25 °C ambient temperature unless otherwise specified

Type	Breakdown Voltage @ I_t (Note 1)			Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Leakage @ V_{RWM} I_R (μ A)	Maximum Reverse Current I_{RSM} (A)	Maximum Clamping Voltage @ I_{RSM} V_{RSM} (V)	Maximum Temperature Co-efficient of V_{BR} (% / °C)
	V_{BR} (V)		I_t (mA)					
	Min.	Max.						
3KE91	81.9	100	1.0	73.7	5.0	22.8	131	0.106
3KE91A	86.5	95.5	1.0	77.8	5.0	24.0	125	0.106
3KE100	90.0	110	1.0	81.0	5.0	20.8	144	0.106
3KE100A	95.0	105	1.0	85.5	5.0	22.0	137	0.106
3KE110	99.0	121	1.0	89.2	5.0	19.0	158	0.107
3KE110A	105	116	1.0	94.0	5.0	19.8	152	0.107
3KE120	108	132	1.0	97.2	5.0	17.4	173	0.107
3KE120A	114	126	1.0	102	5.0	18.2	165	0.107
3KE130	117	143	1.0	105	5.0	16.0	187	0.107
3KE130A	124	137	1.0	111	5.0	16.8	179	0.107
3KE150	135	165	1.0	121	5.0	14.0	215	0.108
3KE150A	143	158	1.0	128	5.0	14.4	207	0.108
3KE160	144	176	1.0	130	5.0	13.0	230	0.108
3KE160A	152	168	1.0	136	5.0	13.6	219	0.108
3KE170	153	187	1.0	138	5.0	12.4	244	0.108
3KE170A	162	179	1.0	145	5.0	12.8	234	0.108
3KE180	162	198	1.0	146	5.0	11.6	258	0.108
3KE180A	171	189	1.0	154	5.0	12.2	246	0.108
3KE200	180	220	1.0	162	5.0	10.4	287	0.108
3KE200A	190	210	1.0	171	5.0	11.0	274	0.108
3KE220	198	242	1.0	175	5.0	8.6	344	0.108
3KE220A	209	231	1.0	185	5.0	9.2	328	0.108
3KE250	225	275	1.0	202	5.0	8.0	360	0.110
3KE250A	237	263	1.0	214	5.0	8.4	344	0.110
3KE300	270	330	1.0	243	5.0	6.8	430	0.110
3KE300A	285	315	1.0	256	5.0	7.2	414	0.110
3KE350	315	385	1.0	284	5.0	5.8	504	0.110
3KE350A	332	368	1.0	300	5.0	6.2	482	0.110
3KE400	360	440	1.0	324	5.0	5.2	574	0.110
3KE400A	380	420	1.0	342	5.0	5.4	548	0.110
3KE440	396	484	1.0	356	5.0	4.6	631	0.110
3KE440A	418	462	1.0	376	5.0	4.8	602	0.110

Notes:

- (1) V_{BR} measured after I_t applied for 300 μ s., I_t = square wave pulse or equivalent.
- (2) V_F = 5.0 Vmax., I_F = 100 Amps. per 1/2 square or equivalent sine wave.
 PW = 8.3 ms, duty cycle = 4 pulses per minute maximum.

RATING AND CHARACTERISTIC CURVES (3KE SERIES)

FIG.1 - PULSE DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

FIG.3 - STEADY STATE POWER DERATING

FIG.4 - PULSE RATING CURVE

FIG.5 - PULSE WAVEFORM


单击下面可查看定价，库存，交付和生命周期等信息

[>>EIC](#)