


## ChipType Standard Capacitors (height:5.5mm)

GREEN CAP

SMD

Anti-cleaning solvent

- Compatible with surface mounting for 5.5mm high capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.




Marking color : Black print

### Specifications

Item	Performance									
Category temperature range (°C)	-40 to +85									
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)									
Leakage current (µA)	Less than 0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)									
Tangent of loss angle (tanδ)	Rated voltage (V)									
		4	6.3	10	16	25	35	50		
tanδ (max.)	φ3	0.42	0.30	0.24	0.22	0.16	0.14	0.12		
	φ4 to φ6.3	0.42	0.28	0.24	0.20	0.14	0.12	0.10		
Characteristics at high and low temperature	Rated voltage(V)									
	Impedance ratio (max.)	φ3	Z-25°C/Z+20°C	4	6.3	10	16	25	35	50
			Z-40°C/Z+20°C	7	4	3	2	2	2	2
	φ4 to φ6.3	Z-25°C/Z+20°C	7	3	3	2	2	2	2	
Z-40°C/Z+20°C		15	8	5	4	3	3	3		
Endurance (85°C) (Applied ripple current)	Test time									
	2000 hours (φ3 : 1000 hours)									
	Leakage current									
	The initial specified value or less									
Percentage of capacitance change										
Within ±20% of initial value (4WV : ±30%)										
Tangent of the loss angle										
200% or less of the initial specified value (4WV : 300%)										
Shelf life (85°C)	Test time : 1000hours ; other items are the same as those for the endurance. Voltage application treatment : According to JIS C5101-1									
Applicable standards	JIS C5101-1 1998, -18 1999 (IEC 60384-1 1992, -18 1993)									

### Outline Drawing

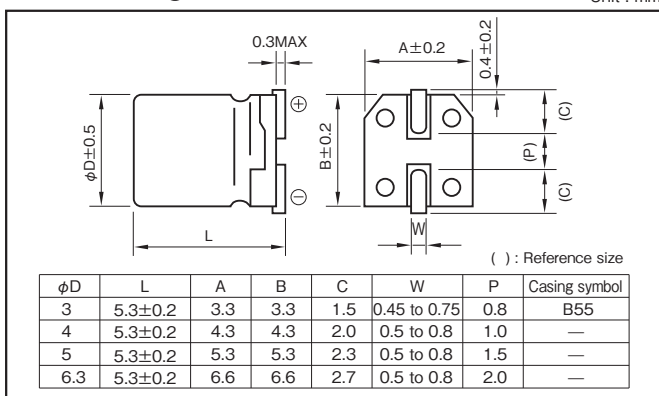

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
4 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

### Part numbering system

• φ3 (example : 16V10µF)

RV2 — 16 V 100 M B55 U — □

Series code    Rated voltage symbol    Rated capacitance symbol    Capacitance tolerance symbol    Casing symbol    Taping symbol

• φ4 to φ6.3 (example : 16V47µF)

RV2 — 16 V 470 M \* U — □

Series code    Rated voltage symbol    Rated capacitance symbol    Capacitance tolerance symbol    Additional symbol    Taping symbol

\*Should add "S", when there is a black point in standard ratings.

- Soldering conditions are described on page 13. • Land pattern size are described on page 11.
- The taping specifications are described on page 14.

### Standard Ratings

Rated capacitance (µF)	4		6.3		10		16		25		35		50	
	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol	Case φD (mm)	Casing symbol
0.1	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 1990 1
0.22	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 905 2
0.33	—	—	—	—	—	—	—	—	—	—	—	—	4	— 754 5
0.47	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 603 3
1	—	—	—	—	—	—	—	—	—	—	—	—	4	— 503 6
2.2	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 424 4
3.3	—	—	—	—	—	—	—	—	—	—	—	—	4	— 353 7
4.7	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 199 6
10	—	—	—	—	—	—	—	—	—	—	—	—	4	— 166 10
22	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 106 8
33	—	—	—	—	—	—	—	—	—	—	—	—	3	B55 70 9
47	—	—	—	—	—	—	—	—	—	—	—	—	4	— 42 20
100	—	—	—	—	—	—	—	—	—	—	—	—	5	— 35 26
220	—	—	—	—	—	—	—	—	—	—	—	—	4	— 166 10

(Note) Rated ripple current : 85°C, 120Hz ; ESR : 20°C, 120Hz

单击下面可查看定价，库存，交付和生命周期等信息

[>>ELNA\(伊娜\)](#)